



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1362**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0887387</b>	WC0873869	WC0850838
Sample Date		Client Info		<b>09 Jan 2024</b>	11 Nov 2023	13 Sep 2023
Machine Age	hrs	Client Info		<b>34150</b>	0	33064
Oil Age	hrs	Client Info		<b>515</b>	474	0
Filter Age	hrs	Client Info		<b>515</b>	474	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>13</b>	16	20
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	1	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	3	4
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	▲ 2.4	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.8</b>	0.8	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.6</b>	10.0	10.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>24.3</b>	27.7	26.4
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	3	3
Boron	ppm	ASTM D5185(m)	250	<b>2</b>	1	1
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>58</b>	57	58
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>940</b>	910	945
Calcium	ppm	ASTM D5185(m)	3000	<b>1047</b>	1017	1042
Phosphorus	ppm	ASTM D5185(m)	1150	<b>982</b>	893	973
Zinc	ppm	ASTM D5185(m)	1350	<b>1153</b>	1116	1153
Sulfur	ppm	ASTM D5185(m)	4250	<b>2617</b>	2366	2494
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>23.2</b>	30.6	27.7
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.1</b>	12.6	13.1

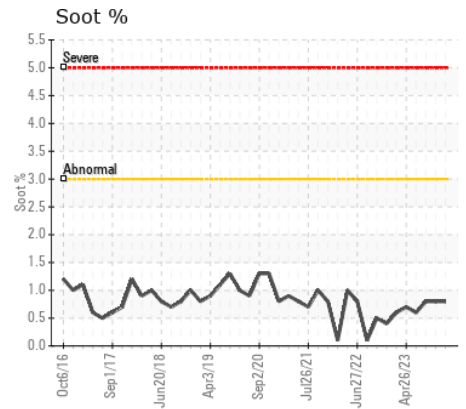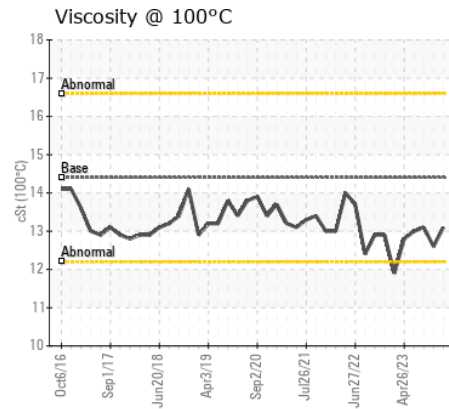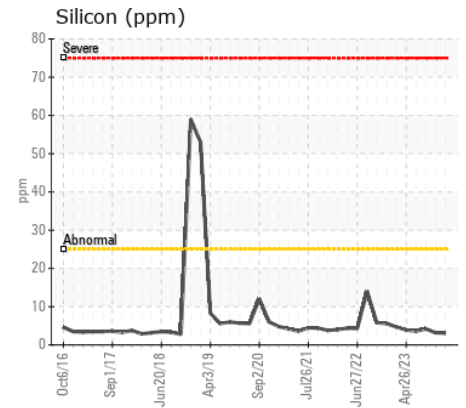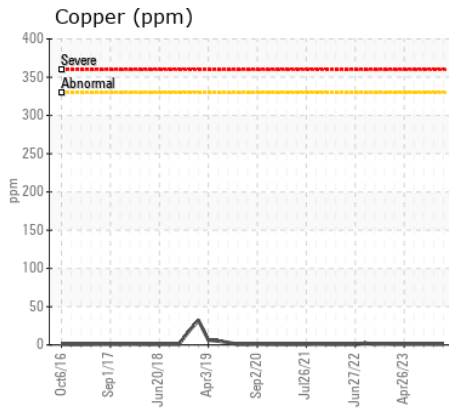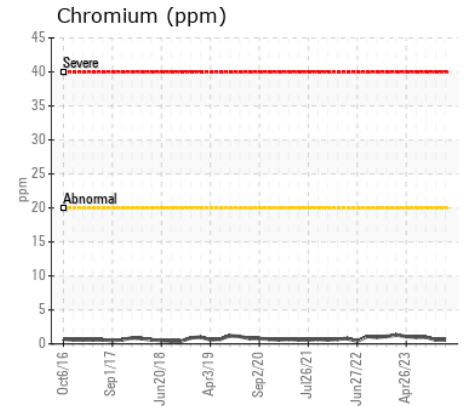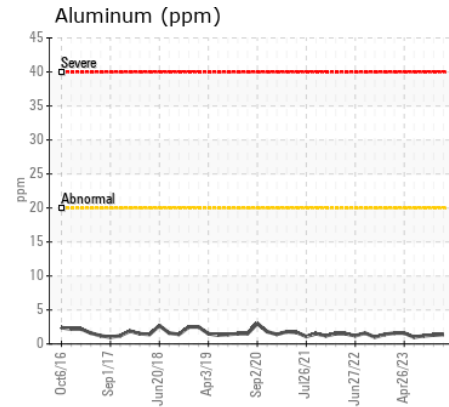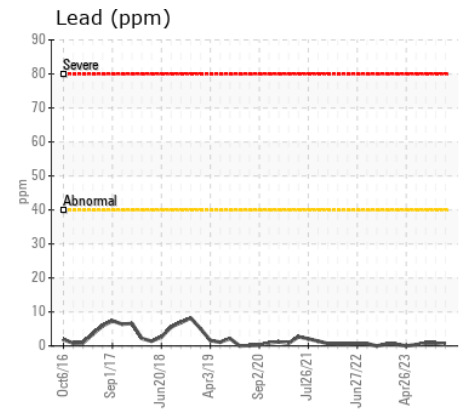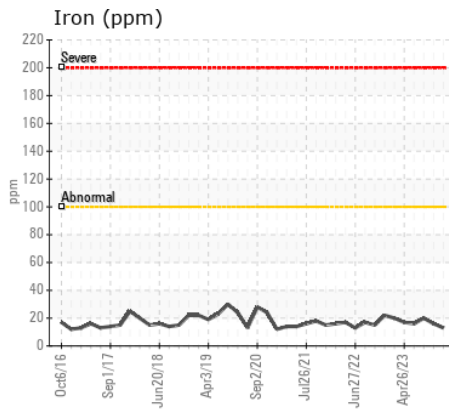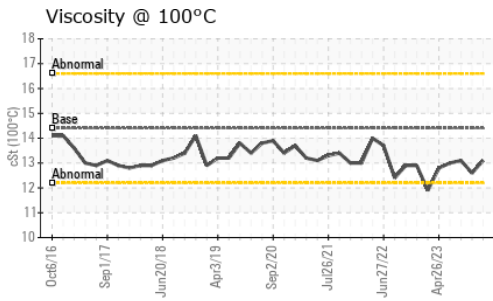

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0887387  
**Lab Number** : 02608878  
**Unique Number** : 5709964  
**Test Package** : MOB 1

**Received** : 16 Jan 2024  
**Diagnosed** : 16 Jan 2024  
**Diagnostician** : Wes Davis

**KINGSTON TRANSIT**  
 1181 JOHN COUNTER BLVD  
 KINGSTON, ON  
 CA K7K 6C7  
 Contact: Brent Gunter  
 bgunter@cityofkingston.ca  
 T: (613)546-4291  
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.