



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
#6 SCHWING (S/N 203557)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0075712	PC0023283	PC0023296
Sample Date		Client Info		13 Jan 2024	28 Jan 2022	08 Jul 2021
Machine Age	hrs	Client Info		37080	30884	29528
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>20	1	2	<1
Chromium	ppm	ASTM D5185(m)	>20	1	1	<1
Nickel	ppm	ASTM D5185(m)	>20	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>20	2	4	2
Copper	ppm	ASTM D5185(m)	>20	34	▲ 63	20
Tin	ppm	ASTM D5185(m)	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>15	<1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		0	0	0
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	0
Calcium	ppm	ASTM D5185(m)	50	57	46	47
Phosphorus	ppm	ASTM D5185(m)	330	356	322	324
Zinc	ppm	ASTM D5185(m)	430	433	377	392
Sulfur	ppm	ASTM D5185(m)	760	814	731	779
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	45.4	45.8	46.5
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	6.9	7.4	7.3
Viscosity Index (VI)	Scale	ASTM D2270*	104	107	125	118

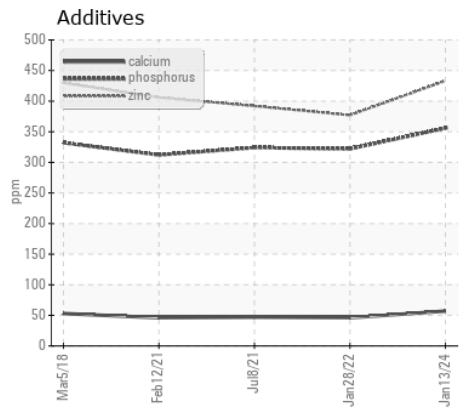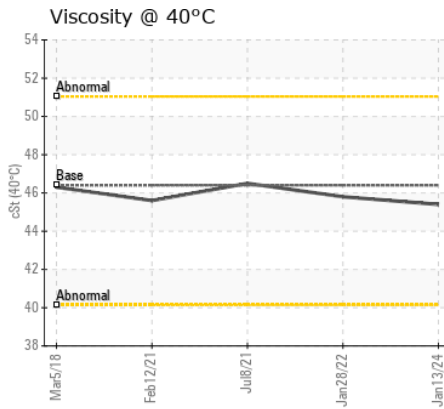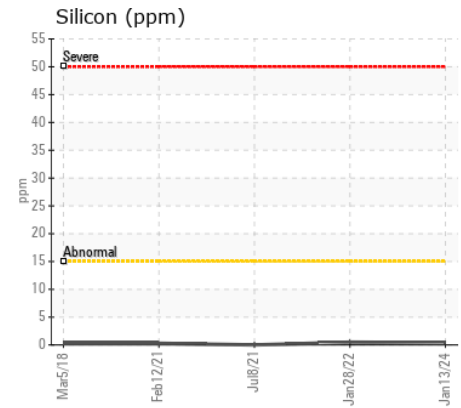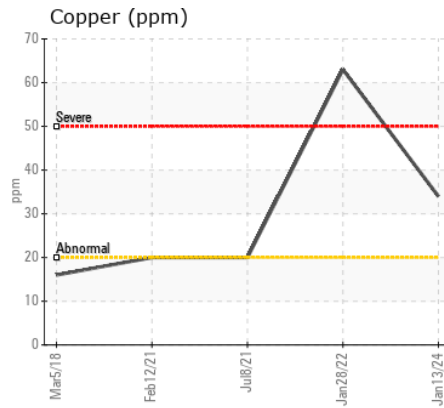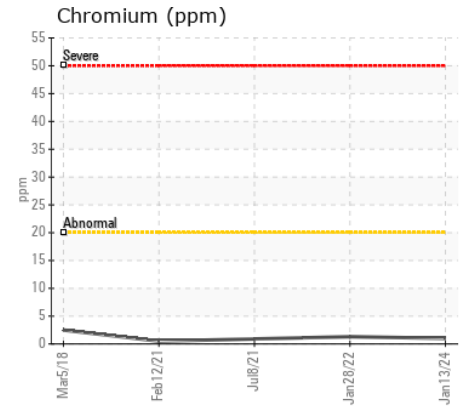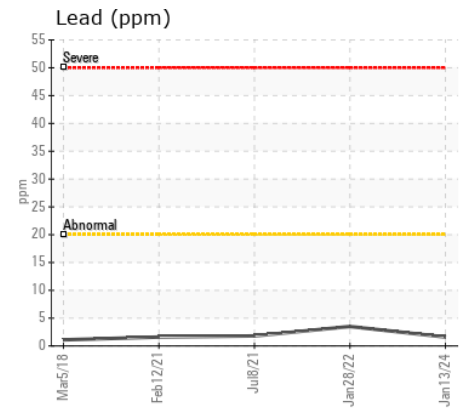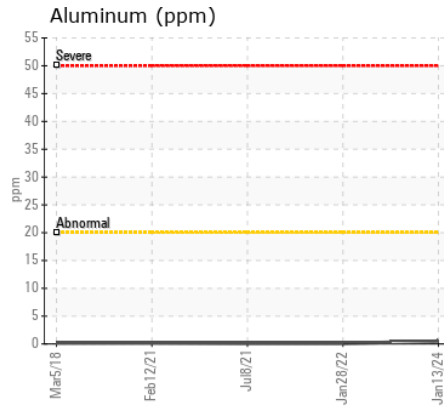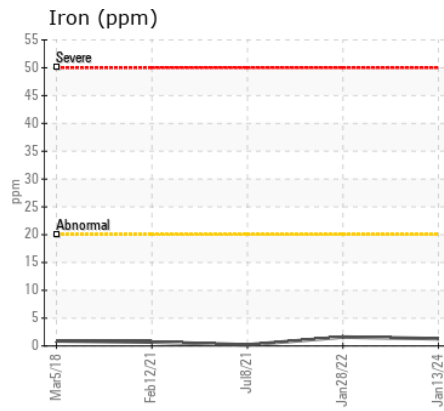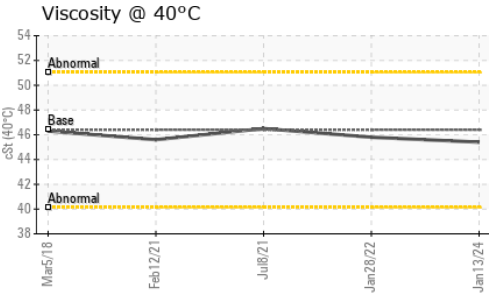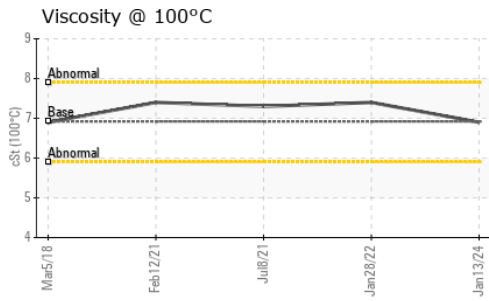

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 ONTARIO CLEAN WATER AGENCY- SOUTH PEEL FACILITIES
Sample No. : PC0075712 **Received** : 16 Jan 2024
Lab Number : 02609008 **Diagnosed** : 16 Jan 2024
Unique Number : 5710094 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

1300 LAKESHORE RD
 MISSISSAUGA, ON
 CA L5E 1E9
 Contact: Angelo Magnifico
 amagnifico@ocwa.com
 T: (905)274-1223
 F: (905)274-2076

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.