



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1521
Component
Transmission (Auto)
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0083707	PC0075872	PC0070835
Sample Date		Client Info		16 Jan 2024	10 Oct 2023	16 Apr 2023
Machine Age	hrs	Client Info		2916	2499	1535
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>160	145	136	105
Chromium	ppm	ASTM D5185(m)	>5	2	2	1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	22	22	18
Lead	ppm	ASTM D5185(m)	>50	1	2	1
Copper	ppm	ASTM D5185(m)	>225	66	62	55
Tin	ppm	ASTM D5185(m)	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	6	7	7
Potassium	ppm	ASTM D5185(m)	>20	2	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		7	7	6
Boron	ppm	ASTM D5185(m)		159	169	170
Barium	ppm	ASTM D5185(m)		3	3	3
Molybdenum	ppm	ASTM D5185(m)		1	<1	1
Manganese	ppm	ASTM D5185(m)		8	8	9
Magnesium	ppm	ASTM D5185(m)		89	91	90
Calcium	ppm	ASTM D5185(m)		261	250	272
Phosphorus	ppm	ASTM D5185(m)		1216	1225	1327
Zinc	ppm	ASTM D5185(m)		286	295	291
Sulfur	ppm	ASTM D5185(m)		856	863	882
Visc @ 40°C	cSt	ASTM D7279(m)		88.7	88.6	91.1
Visc @ 100°C	cSt	ASTM D7279(m)		13.2	13.3	13.8
Viscosity Index (VI)	Scale	ASTM D2270*		149	150	154

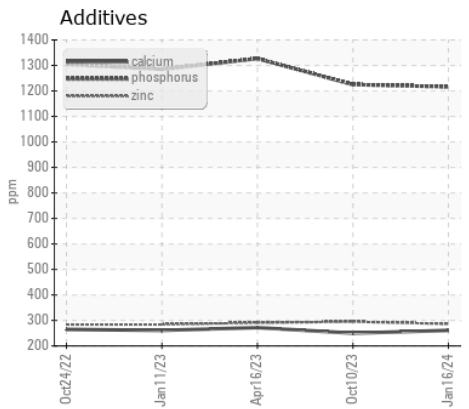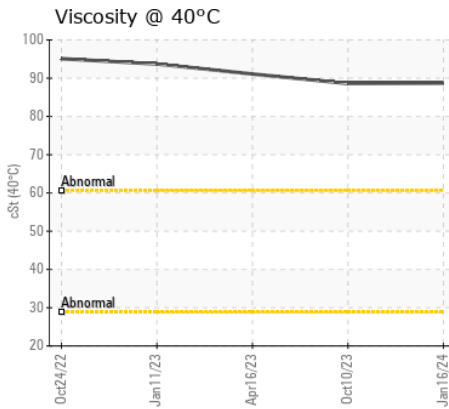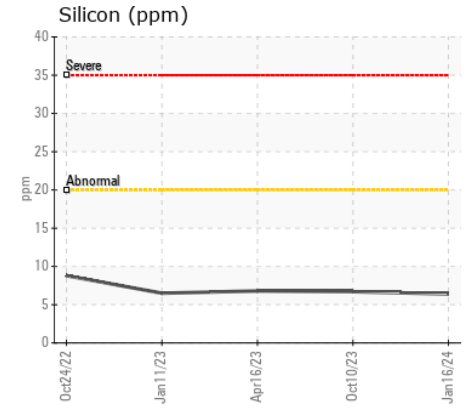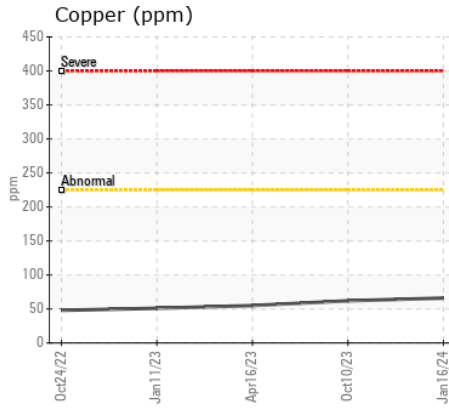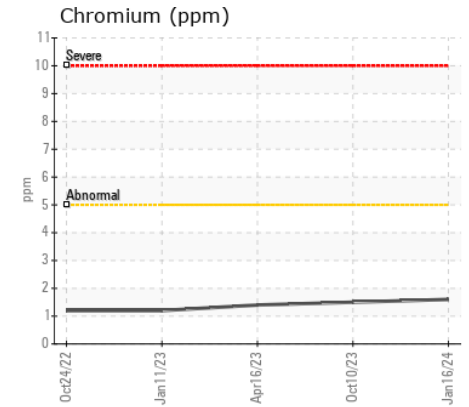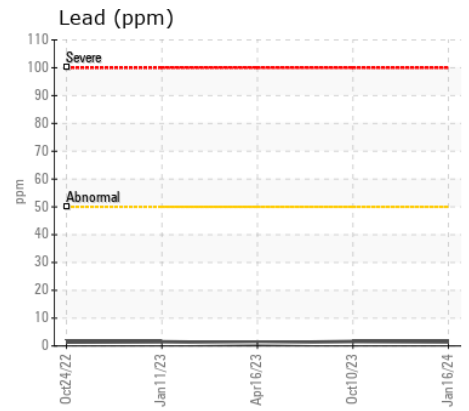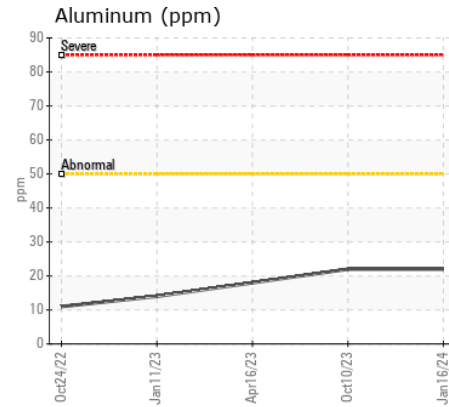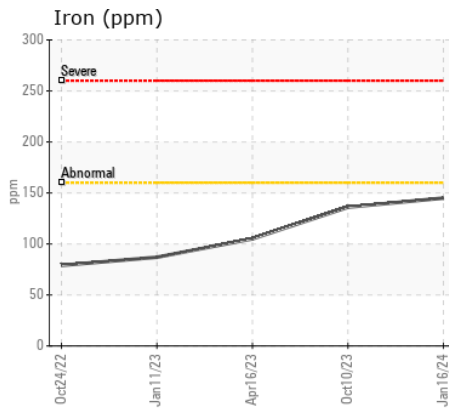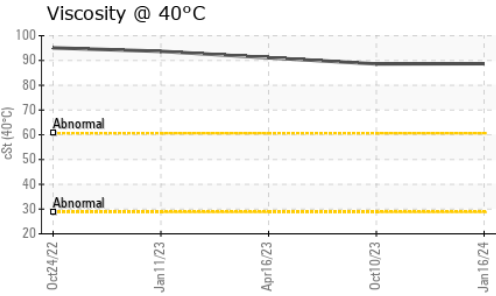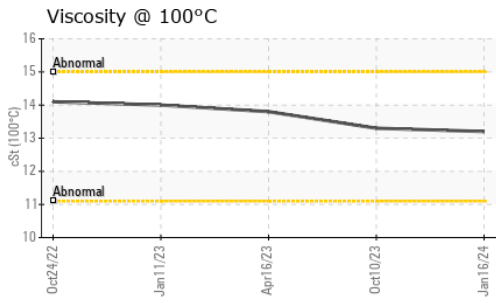

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.
Sample No. : PC0083707 **Received** : 17 Jan 2024
Lab Number : 02609442 **Diagnosed** : 17 Jan 2024
Unique Number : 5710528 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Martin Trudel
 mtrudel@michaudville.com
 T:
 F: