



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[331534]**  
 Machine Id  
**CN 1880 G2**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CU0023039</b>	---	---
Sample Date		Client Info		<b>09 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2700</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>90	<b>25</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

## CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>6	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>13.3</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>26.3</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>158	<b>4</b>	---	---
Boron	ppm	ASTM D5185(m)	250	<b>34</b>	---	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>62</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	450	<b>1079</b>	---	---
Calcium	ppm	ASTM D5185(m)	3000	<b>925</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>965</b>	---	---
Zinc	ppm	ASTM D5185(m)	1350	<b>1187</b>	---	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2743</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>32.3</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.8</b>	---	---

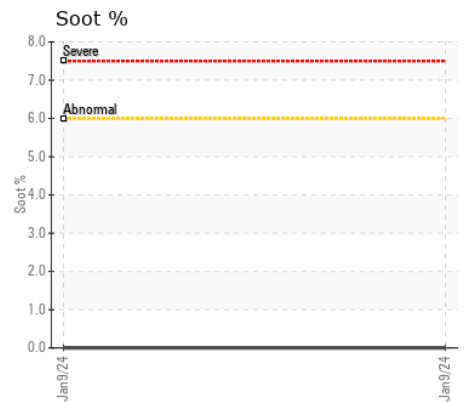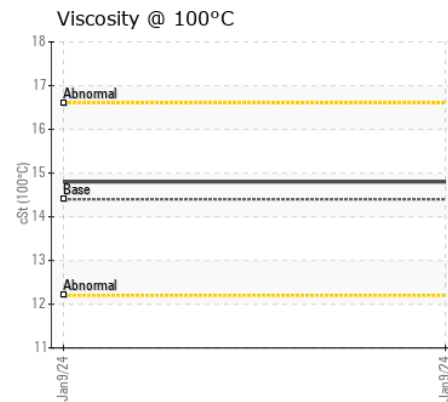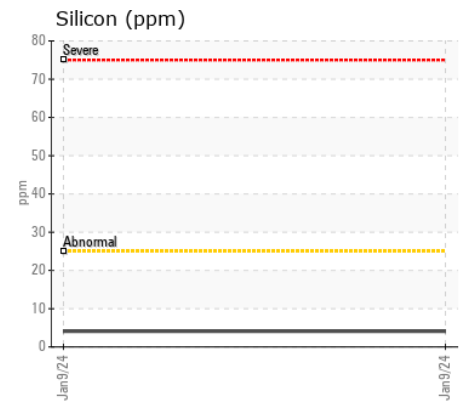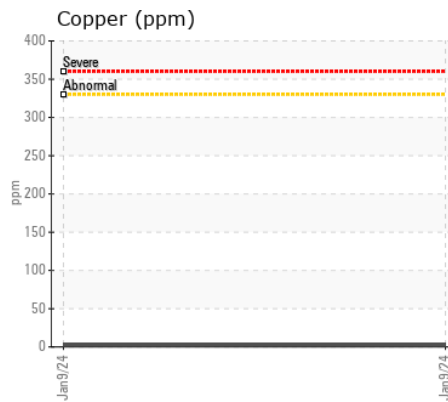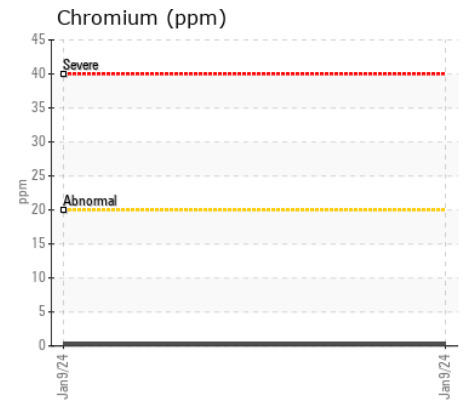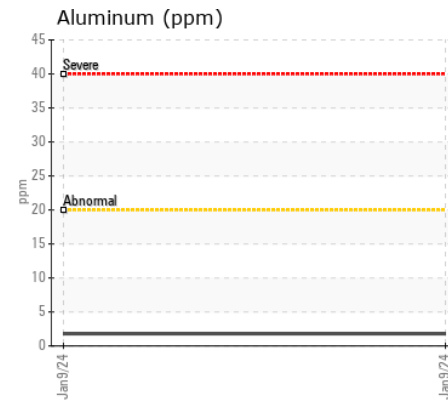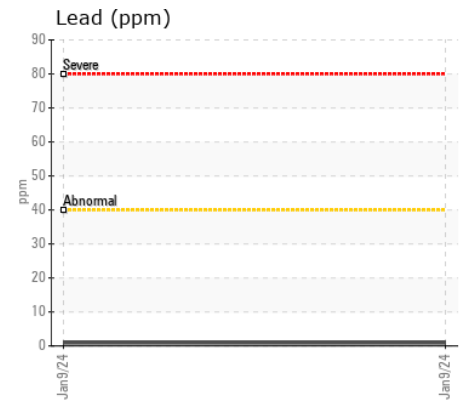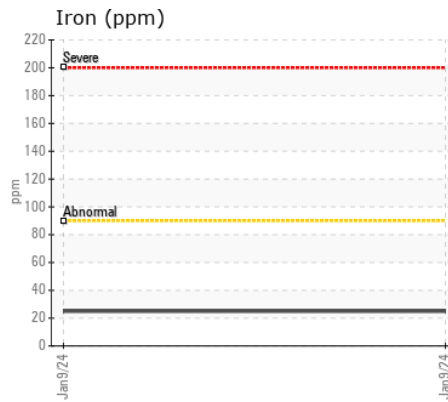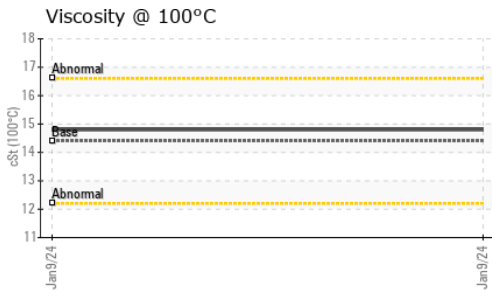

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0023039 **Received** : 18 Jan 2024  
**Lab Number** : 02609611 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710697 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**CUMMINS EASTERN CANADA LP**  
 315 AV LIBERTE  
 CANDIAC, QC  
 CA J5R 6Z7  
 Contact: Thomas Owens  
 is275@cummins.com  
 T: (450)638-6863  
 F: (450)638-1202

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.