



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
113718-1216

Component
Pump Drive

Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0279414	---	---
Sample Date		Client Info		17 Jan 2024	---	---
Machine Age	hrs	Client Info		9629	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	3	---	---
Chromium	ppm	ASTM D5185(m)	>15	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)		0	---	---
Copper	ppm	ASTM D5185(m)	>35	<1	---	---
Tin	ppm	ASTM D5185(m)	>4	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		100	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		45	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		862	---	---
Calcium	ppm	ASTM D5185(m)		1049	---	---
Phosphorus	ppm	ASTM D5185(m)		1054	---	---
Zinc	ppm	ASTM D5185(m)		1173	---	---
Sulfur	ppm	ASTM D5185(m)		3145	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	106	80.1	---	---

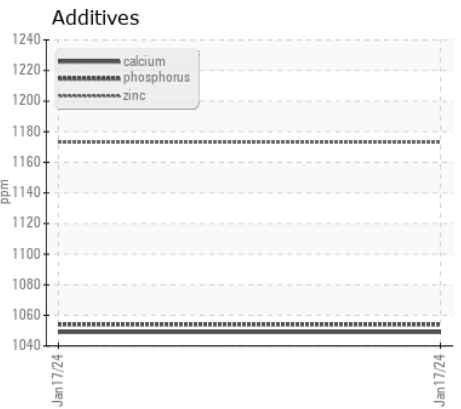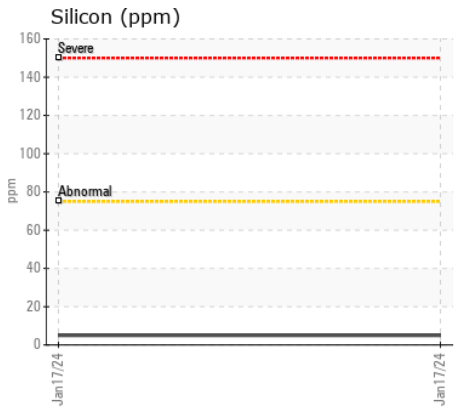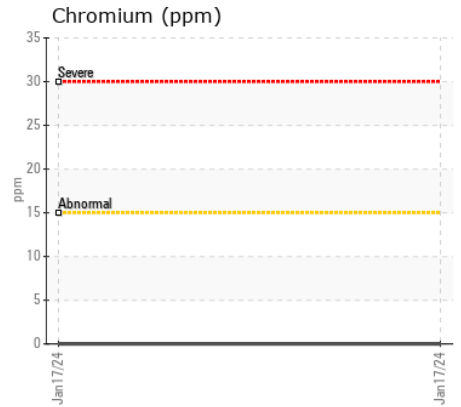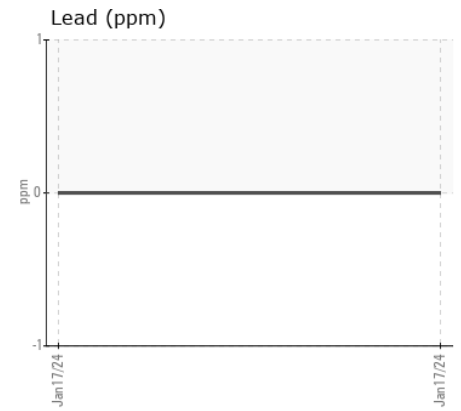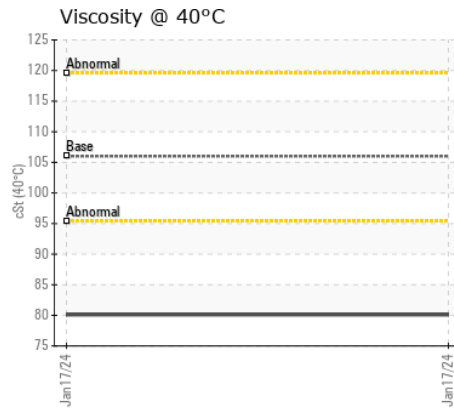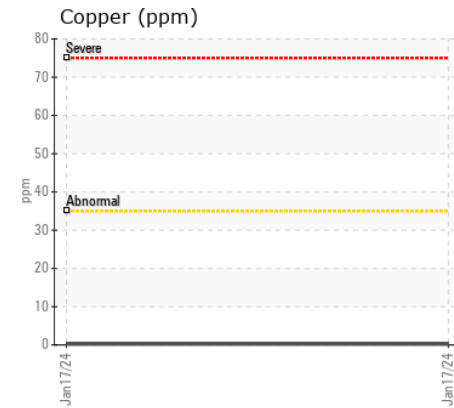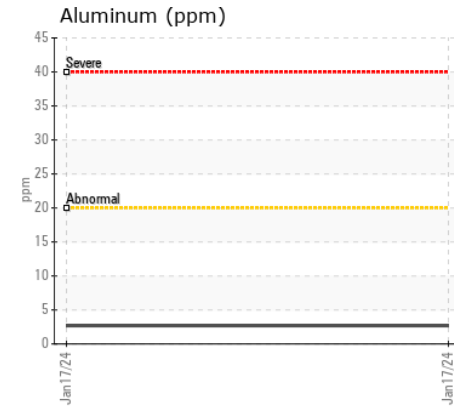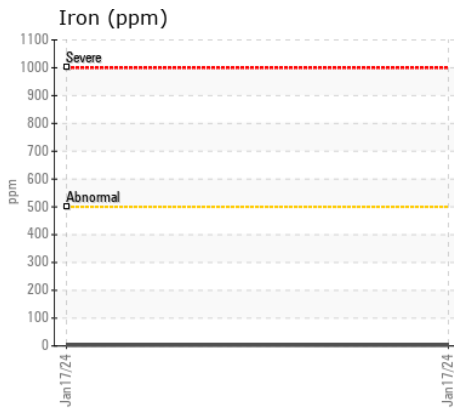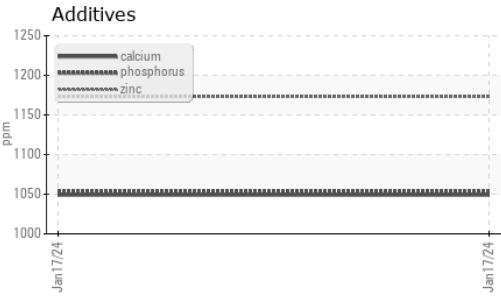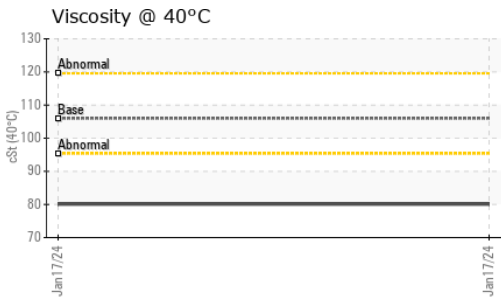

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0279414 **Received** : 18 Jan 2024
Lab Number : 02609734 **Diagnosed** : 18 Jan 2024
Unique Number : 5710820 **Diagnostician** : Kevin Marson
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

American Iron and Metal
 2555 Sheffield Road
 Ottawa, ON
 CA K1B 3V6
 Contact: Dan Dupelle
 ddupelle@aim-rg.com
 T: (613)228-9380
 F: (613)745-0692