



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
CATERPILLAR AP1055D 2560903

Component
Right Auger

Fluid
PETRO CANADA ENDURATEX EP 220 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION












Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084921	PC0072297	PC0053652
Sample Date		Client Info		08 Jan 2024	14 Apr 2023	19 Apr 2022
Machine Age	hrs	Client Info		11554	11000	10325
Oil Age	hrs	Client Info		554	500	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>200	15	15	15
Chromium	ppm	ASTM D5185(m)	>10	0	0	<1
Nickel	ppm	ASTM D5185(m)	>10	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)		<1	<1	1
Lead	ppm	ASTM D5185(m)		<1	1	2
Copper	ppm	ASTM D5185(m)		5	6	8
Tin	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)		2	2	3
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		<1	1	1
Boron	ppm	ASTM D5185(m)	60	16	18	18
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	8	11	13
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	▲ 117	▲ 156	185
Calcium	ppm	ASTM D5185(m)	0	▲ 544	▲ 908	838
Phosphorus	ppm	ASTM D5185(m)	270	567	715	734
Zinc	ppm	ASTM D5185(m)	0	▲ 316	▲ 475	519
Sulfur	ppm	ASTM D5185(m)	11200	▲ 4421	▲ 4051	4275
Visc @ 40°C	cSt	ASTM D7279(m)	220	152	▲ 106	136
Visc @ 100°C	cSt	ASTM D7279(m)	19.35	19.2	▲ 14.6	17.6
Viscosity Index (VI)	Scale	ASTM D2270*	99	144	141	142

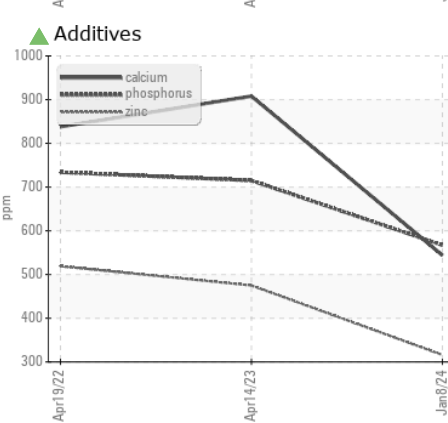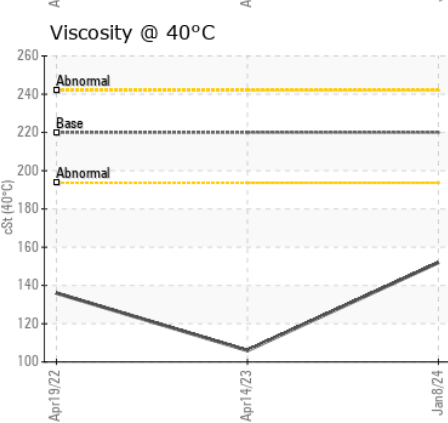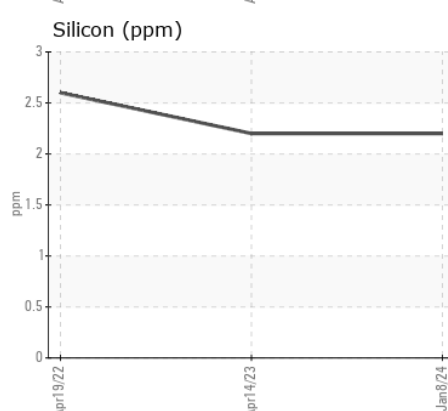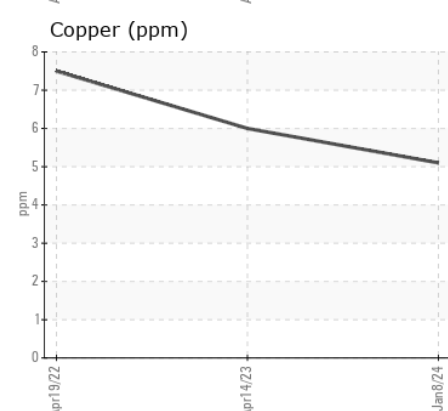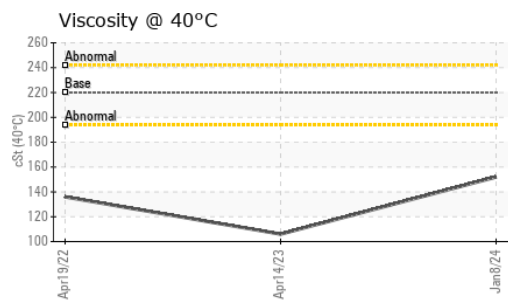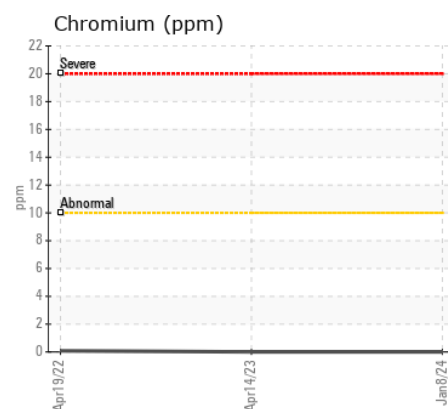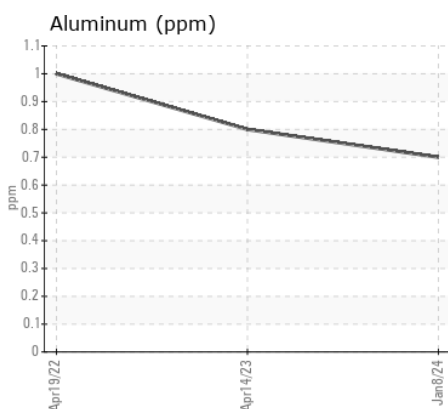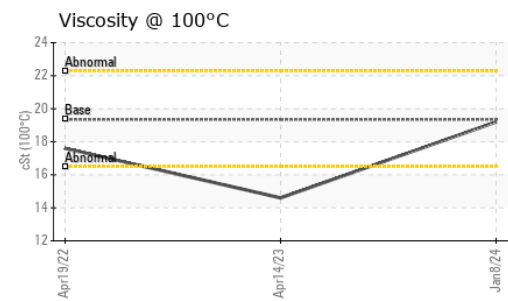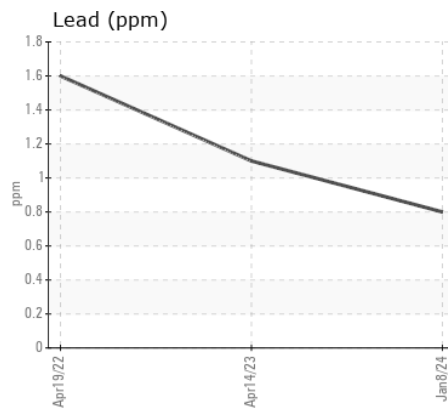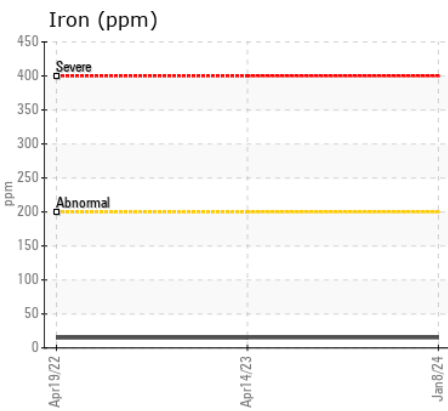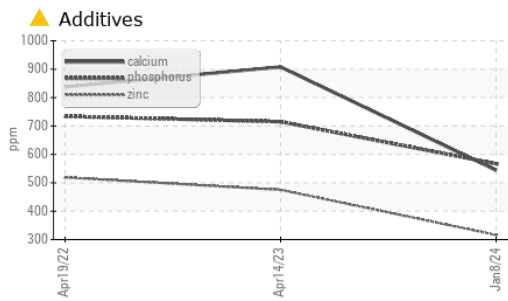

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084921 **Received** : 18 Jan 2024
Lab Number : 02609756 **Diagnosed** : 19 Jan 2024
Unique Number : 5710842 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.