



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR PR776 24302
Component
Diesel Engine
Fluid
PETRO CANADA 10W40 (90 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0265124	LH0265097	---
Sample Date		Client Info		18 Jan 2024	24 Aug 2023	---
Machine Age	hrs	Client Info		6158	4288	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	5	5	---
Chromium	ppm	ASTM D5185(m)	>5	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>15	2	<1	---
Lead	ppm	ASTM D5185(m)	>30	<1	0	---
Copper	ppm	ASTM D5185(m)	>125	<1	<1	---
Tin	ppm	ASTM D5185(m)	>5	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	VLITE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	3	3	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	8.3	8.0	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	20.9	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	4	7	---
Boron	ppm	ASTM D5185(m)		37	35	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		57	54	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)		1101	1098	---
Calcium	ppm	ASTM D5185(m)		835	797	---
Phosphorus	ppm	ASTM D5185(m)		1026	1032	---
Zinc	ppm	ASTM D5185(m)		1182	1164	---
Sulfur	ppm	ASTM D5185(m)		2947	2751	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.3	17.5	---
Visc @ 100°C	cSt	ASTM D7279(m)		13.9	13.8	---

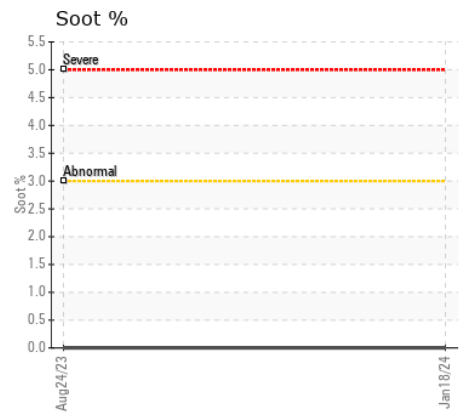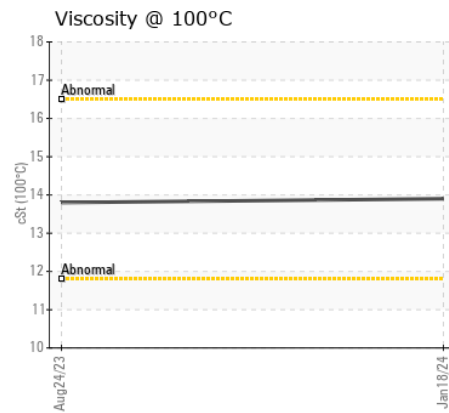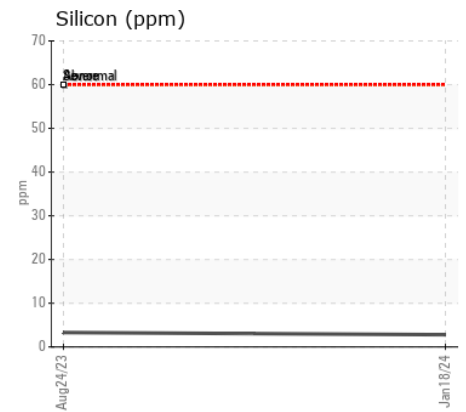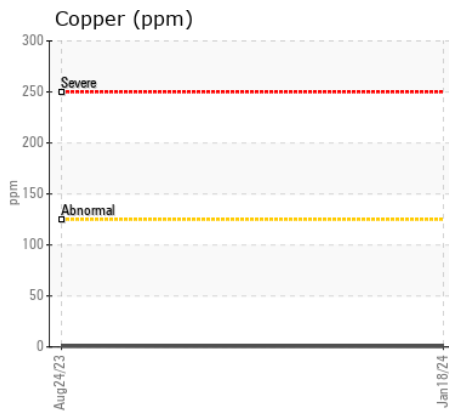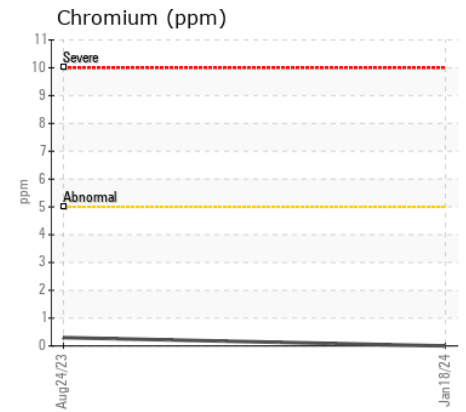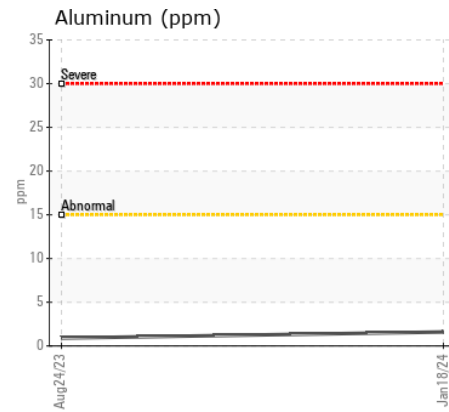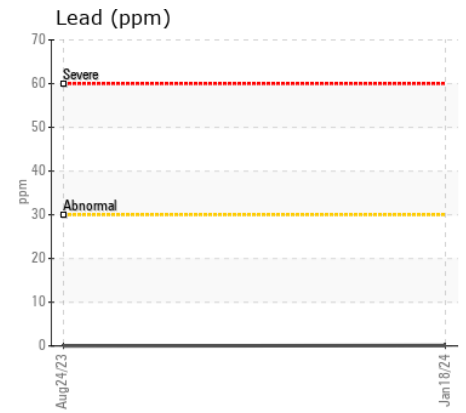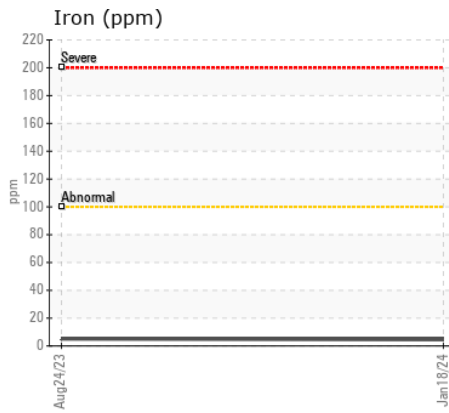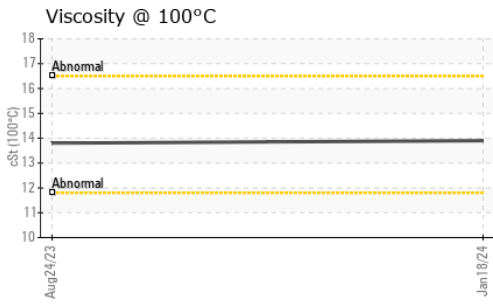

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0265124 **Received** : 19 Jan 2024
Lab Number : 02609937 **Diagnosed** : 19 Jan 2024
Unique Number : 5711023 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

ARGONAUT GOLD
 DUBREUILVILLE MINE
 DUBREUILVILLE, ON
 CA
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: