



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Machine Id
111-12083 MA COMPACTOR
Component
Hydraulic System
Fluid
ESSO NUTO H ISO32 (25 g)

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

WEAR

All component wear rates are normal.









CONTAMINATION

There is a high amount of particulates (2 to 100 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0839725	WC0839718	WC0723163
Sample Date		Client Info		11 Jan 2024	18 Dec 2023	09 Dec 2022
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Filter Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	SEVERE	NORMAL
Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>20	5	6	6
Nickel	ppm	ASTM D5185(m)	>20	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	0
Lead	ppm	ASTM D5185(m)	>20	<1	<1	0
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	▲ LIGHT	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>15	3	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	▲ 52547	▲ 154213	1184
Particles >6µm		ASTM D7647	>1300	▲ 14429	▲ 50750	327
Particles >14µm		ASTM D7647	>160	▲ 644	▲ 3274	20
Particles >21µm		ASTM D7647	>40	▲ 135	▲ 700	4
Particles >38µm		ASTM D7647	>10	▲ 12	▲ 52	0
Particles >71µm		ASTM D7647	>3	3	4	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 23/21/17	▲ 24/23/19	17/16/11
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	▲ LIGHT	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		0	<1	0
Boron	ppm	ASTM D5185(m)		0	0	0
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	<1	<1
Calcium	ppm	ASTM D5185(m)		44	43	42
Phosphorus	ppm	ASTM D5185(m)		354	350	374
Zinc	ppm	ASTM D5185(m)		434	433	424
Sulfur	ppm	ASTM D5185(m)		3376	3345	3226
Acid Number (AN)	mg KOH/g	ASTM D974*	.40	0.41	0.48	0.44
Visc @ 40°C	cSt	ASTM D7279(m)	32.6	32.1	32.7	32.4

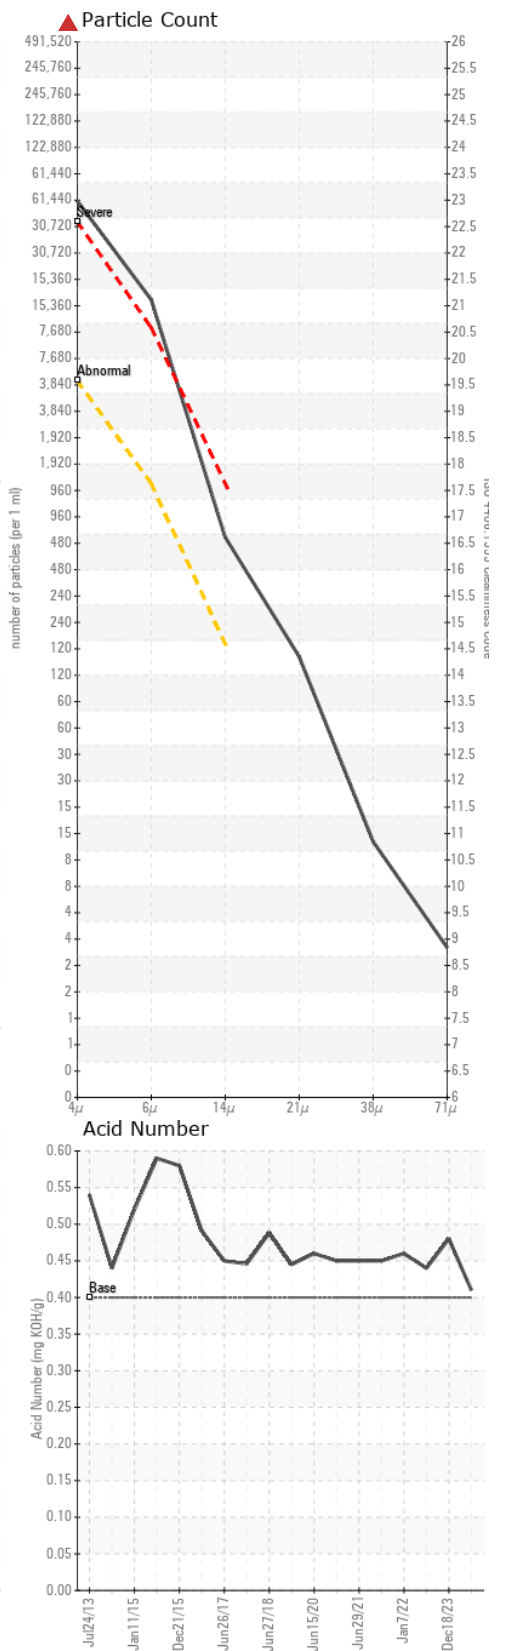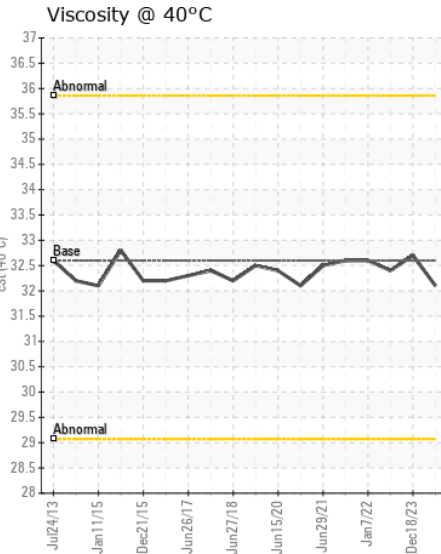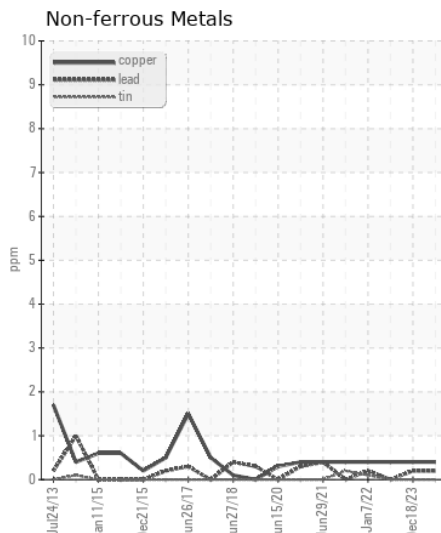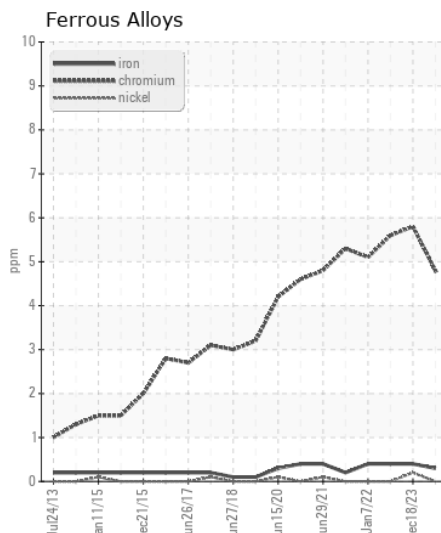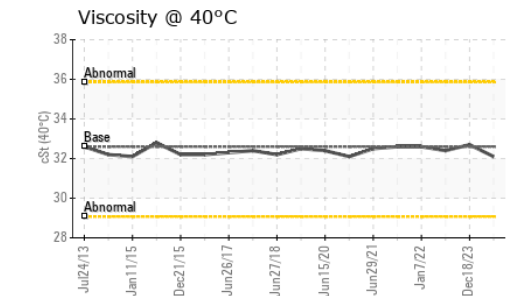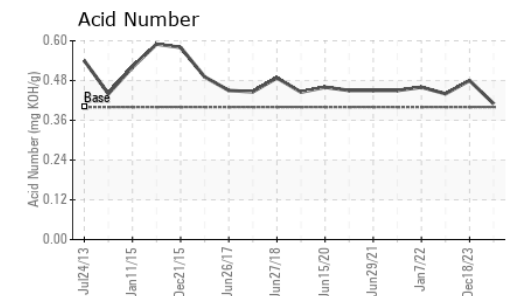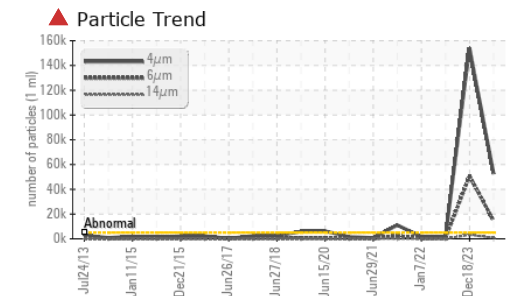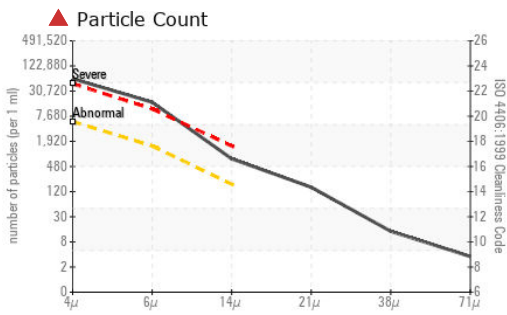

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0839725
Lab Number : 02609971
Unique Number : 5711057
Test Package : IND 2
Received : 19 Jan 2024
Tested : 22 Jan 2024
Diagnosed : 22 Jan 2024 - Wes Davis

DXP - SCS - Sabic IP Cobourg
 44 Normar Road
 Cobourg, ON
 CA K9A 4L7
 Contact: George DiFrancesco
 george.difrancesco@sabic.com
 T: (905)373-3988
 F: (905)373-3844

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.