



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO VNL 13005
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0685949	---	---
Sample Date		Client Info		18 Jan 2024	---	---
Machine Age	kms	Client Info		772672	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	13	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>25	3	---	---
Lead	ppm	ASTM D5185(m)	>40	4	---	---
Copper	ppm	ASTM D5185(m)	>330	108	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.4	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	250	138	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	65	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	450	241	---	---
Calcium	ppm	ASTM D5185(m)	3000	1821	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1012	---	---
Zinc	ppm	ASTM D5185(m)	1350	1165	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2822	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	13.5	---	---

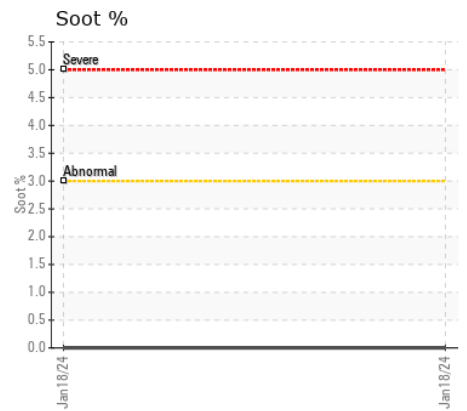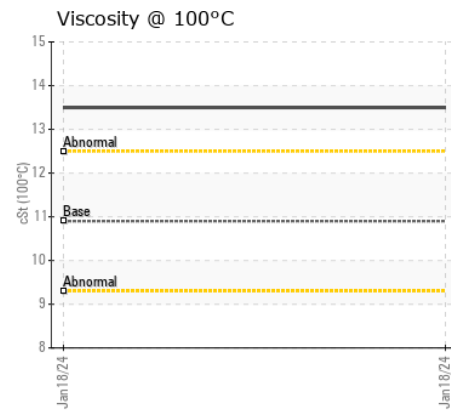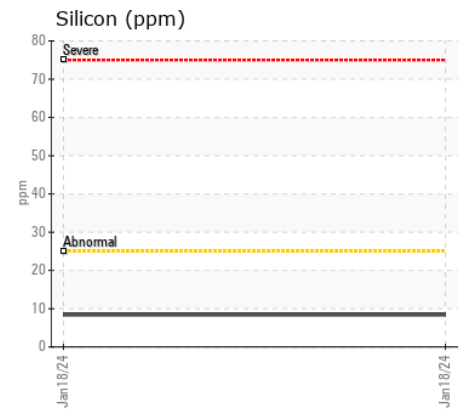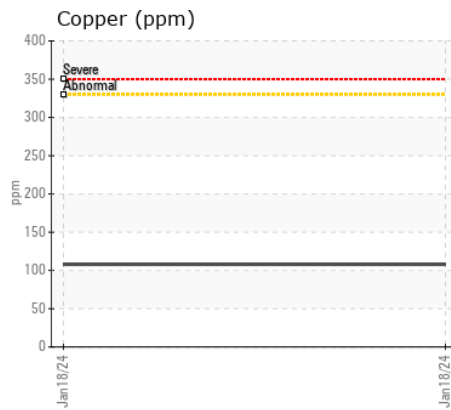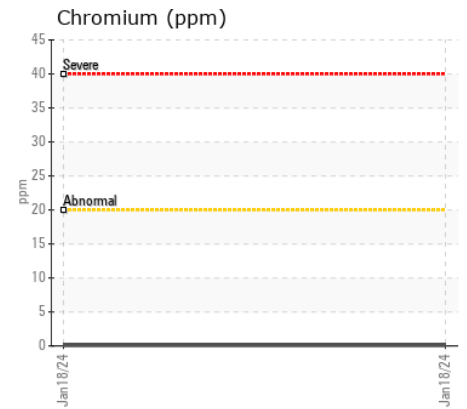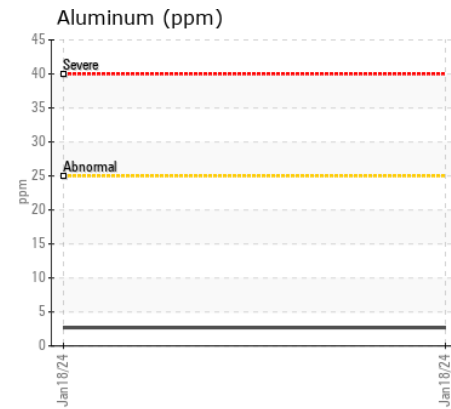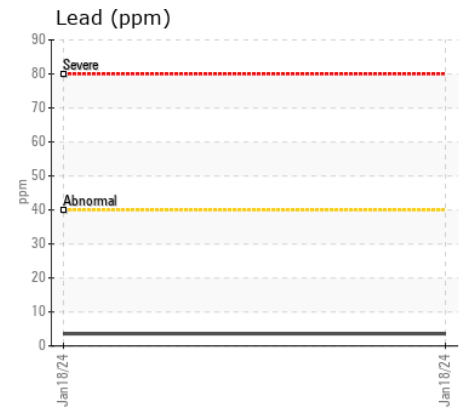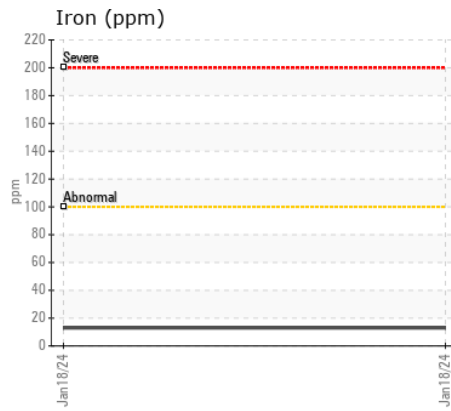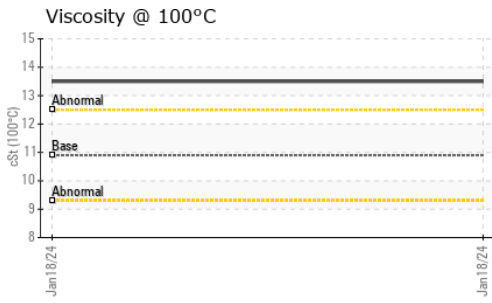

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0685949 **Received** : 22 Jan 2024
Lab Number : 02610126 **Diagnosed** : 22 Jan 2024
Unique Number : 5711212 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Vision Truck Group
 300 Steelwell Road
 Brampton, ON
 CA L6T 5T3
 Contact: Service Manager
 HROMAS@VISIONTRUCKGROUP.COM

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: