



Machine Id
911041
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

RECOMMENDATION

Nous recommandons le remplacement des filtres de ce composant.
Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107515	GFL0087664	GFL0061766
Sample Date		Client Info		14 Feb 2024	29 Aug 2023	15 Nov 2022
Machine Age	kms	Client Info		140601	117031	3079
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	SEVERE	ABNORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>50	27	48	13
Chromium	ppm	ASTM D5185(m)	>10	3	6	2
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	1	2	<1
Lead	ppm	ASTM D5185(m)	>4	0	0	<1
Copper	ppm	ASTM D5185(m)	>15	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








Il y a une quantité modérée de particules (de 4 à 14 microns) dans l'huile.

Silicon	ppm	ASTM D5185(m)	>15	3	6	2
Potassium	ppm	ASTM D5185(m)	>20	1	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	36270	83293	32483
Particles >6µm		ASTM D7647	>1300	322	3018	4211
Particles >14µm		ASTM D7647	>160	11	79	241
Particles >21µm		ASTM D7647	>40	3	18	49
Particles >38µm		ASTM D7647	>10	1	1	2
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	22/16/11	24/19/13	22/19/15
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

l'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

Sodium	ppm	ASTM D5185(m)		8	20	6
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	0
Manganese	ppm	ASTM D5185(m)	1	0	<1	0
Magnesium	ppm	ASTM D5185(m)	0	2	3	1
Calcium	ppm	ASTM D5185(m)	50	59	61	54
Phosphorus	ppm	ASTM D5185(m)	330	356	371	364
Zinc	ppm	ASTM D5185(m)	430	435	443	411
Sulfur	ppm	ASTM D5185(m)	760	835	826	811
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	33.3	35.6	35.7

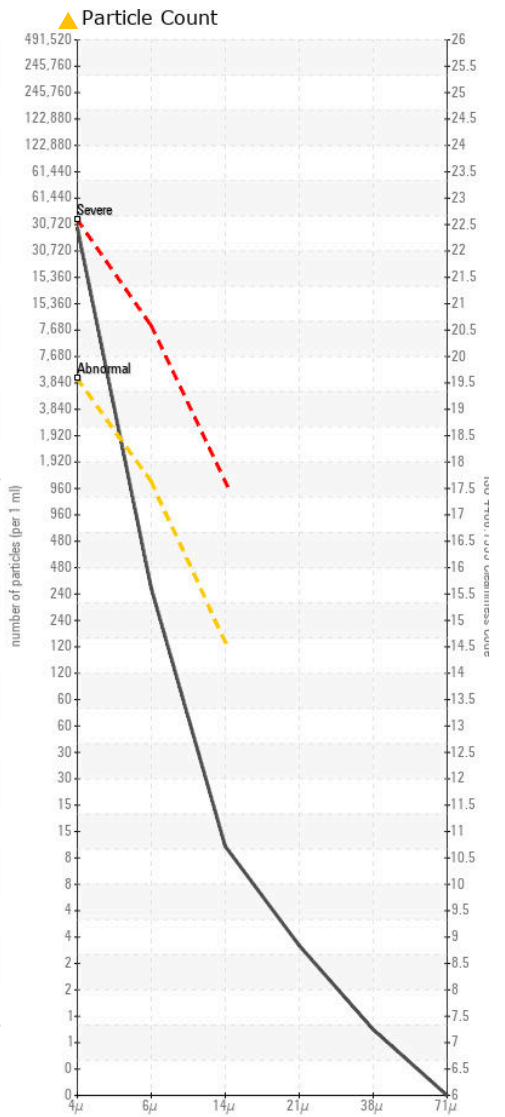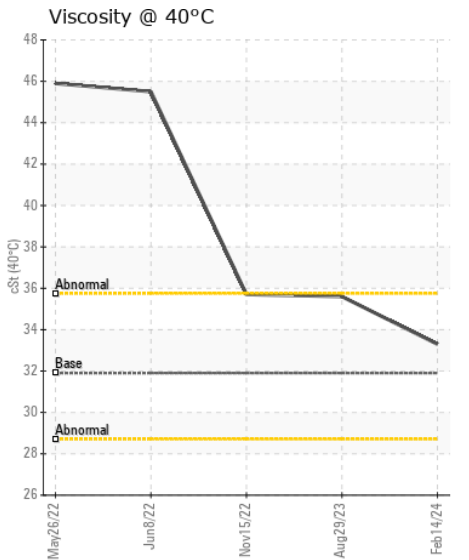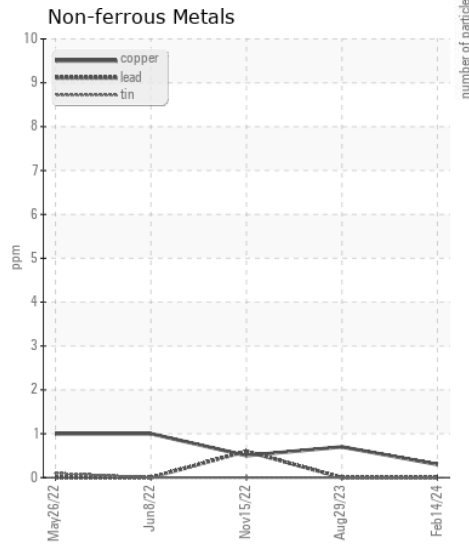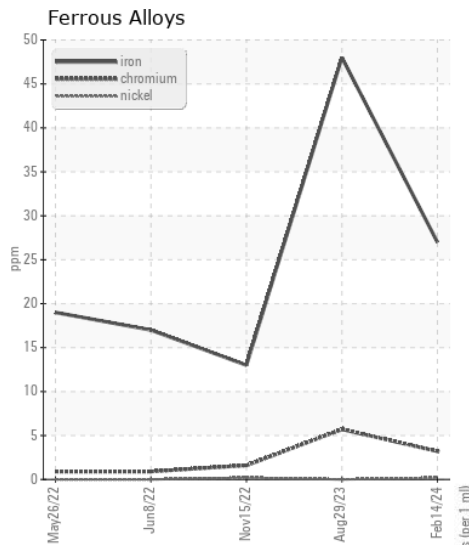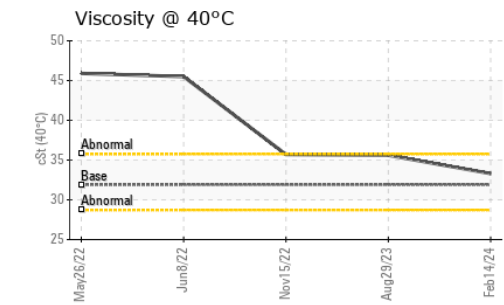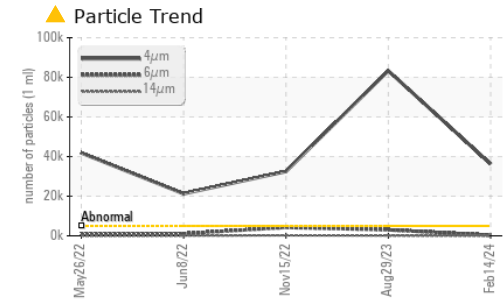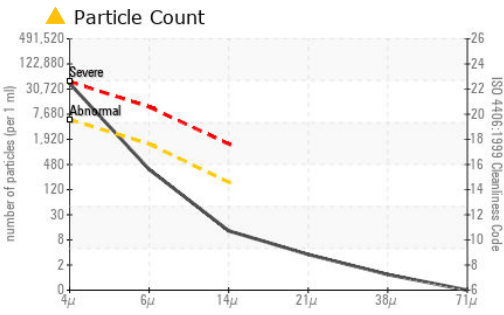

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107515
Lab Number : 02616000
Unique Number : 5733110
Test Package : MOB 1 (Additional Tests: PrtCount)

GFL Environmental - 747 - GMA - Solid Waste
 4 Chemin du Tremblay,
 Boucherville, QC
 CA J4B 6Z5
 Contact: Steve Voyer
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: