



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
GFL216
Machine Id
910080
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110267	GFL0101408	GFL0093788
Sample Date		Client Info		11 Feb 2024	04 Dec 2023	06 Sep 2023
Machine Age	hrs	Client Info		9678	141398	132261
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	13	16	11
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>15	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	1
Lead	ppm	ASTM D5185(m)	>40	1	1	2
Copper	ppm	ASTM D5185(m)	>330	2	2	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	6	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.6	0.7	0.6
Nitration	Abs/cm	ASTM D7624*	>20	8.3	8.6	8.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	20.5	19.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>216	5	5	4
Boron	ppm	ASTM D5185(m)	250	2	4	5
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	58	61	60
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	450	954	983	965
Calcium	ppm	ASTM D5185(m)	3000	1054	1067	1043
Phosphorus	ppm	ASTM D5185(m)	1150	953	929	977
Zinc	ppm	ASTM D5185(m)	1350	1153	1187	1178
Sulfur	ppm	ASTM D5185(m)	4250	2353	2226	2193
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.8	16.1	15.4
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.0	13.6	13.6

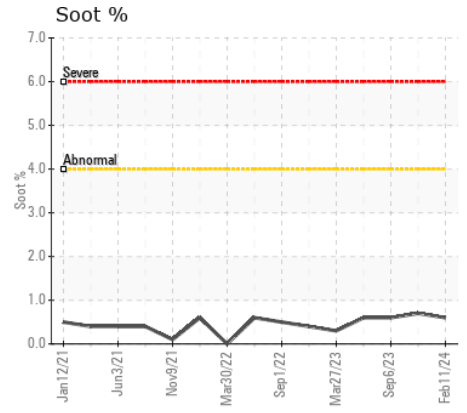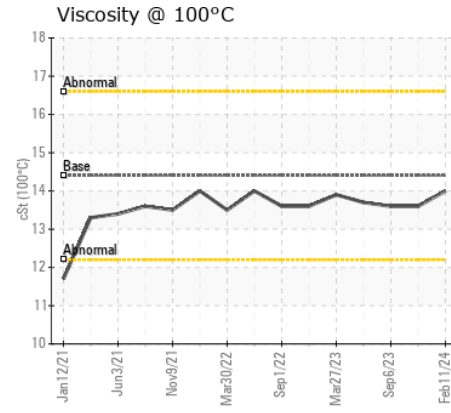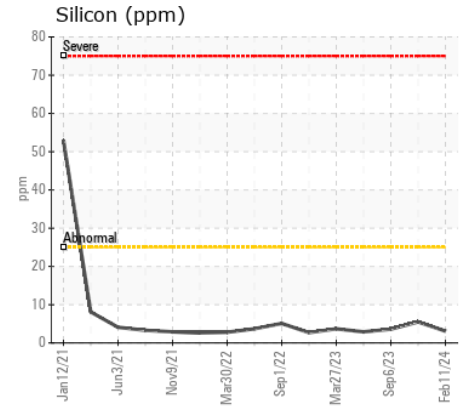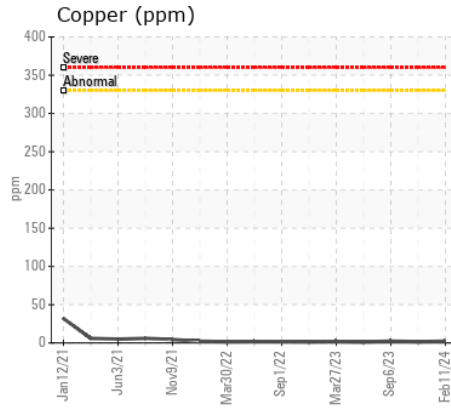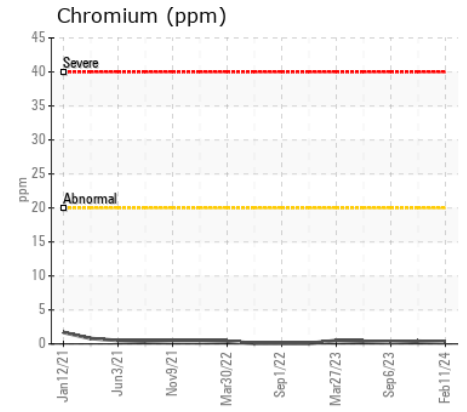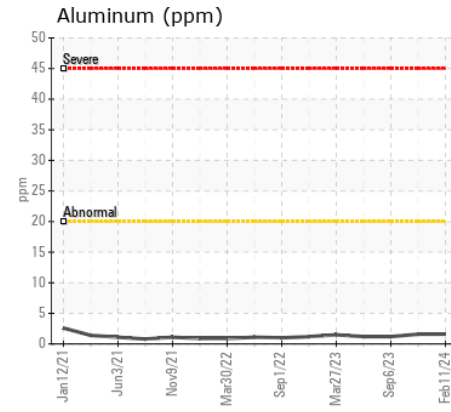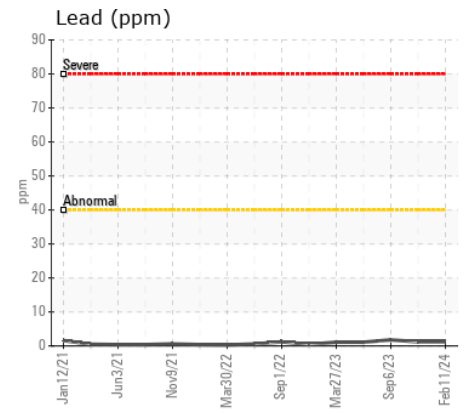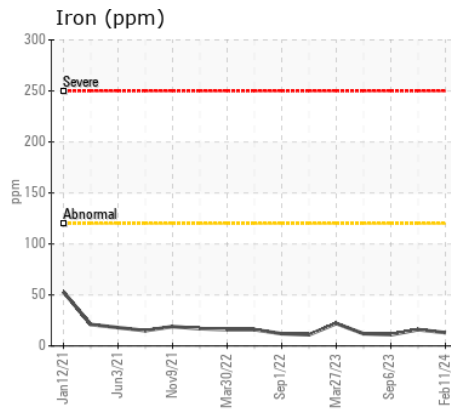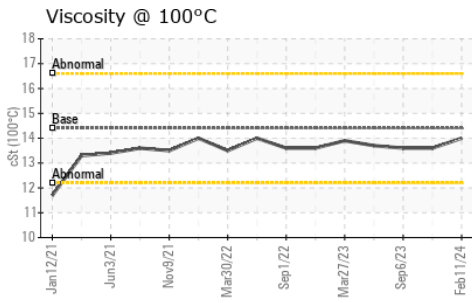

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0110267
Lab Number : 02616142
Unique Number : 5733252
Test Package : MOB 1

GFL Environmental - 252 - GTA Hauling
 3668 Weston Road
 North York, ON
 CA M9L 1W2
 Contact: Amanda Cipollone
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: