

Machine Id
352133
Component
Gasoline Engine
Fluid
PETRO CANADA SUPREME SYNTHETIC 5W30 (--- GAL)

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0097577	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	kms	Client Info		0	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>150	8	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	3	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>155	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>30	20	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>4.0	11.2	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.0	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)	>400	5	---	---
Boron	ppm	ASTM D5185(m)	186	37	---	---
Barium	ppm	ASTM D5185(m)	<1	0	---	---
Molybdenum	ppm	ASTM D5185(m)	79	63	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	578	465	---	---
Calcium	ppm	ASTM D5185(m)	1002	1134	---	---
Phosphorus	ppm	ASTM D5185(m)	745	628	---	---
Zinc	ppm	ASTM D5185(m)	837	686	---	---
Sulfur	ppm	ASTM D5185(m)	2502	2385	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	7.6	---	---

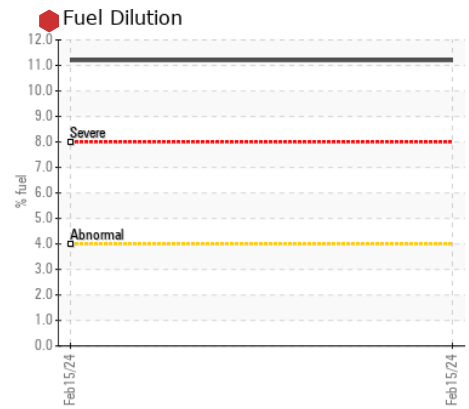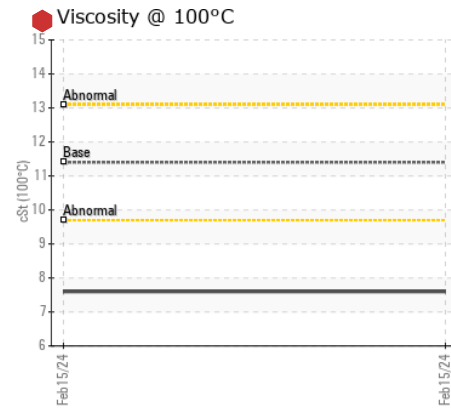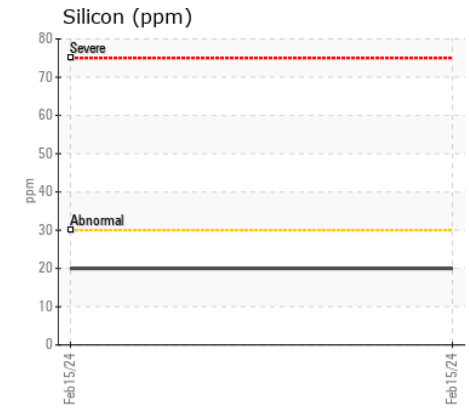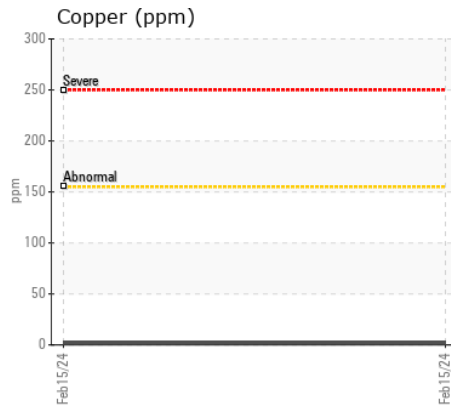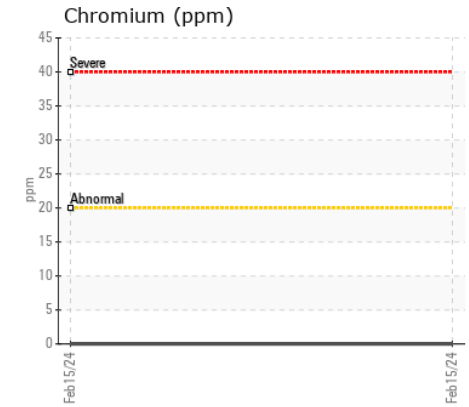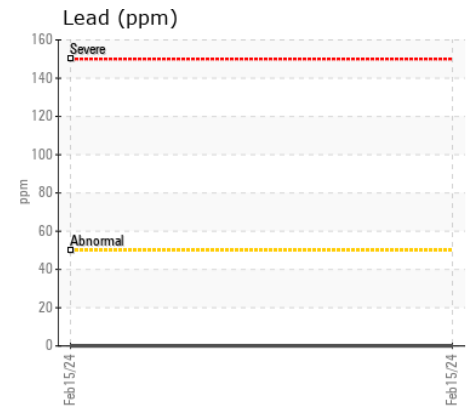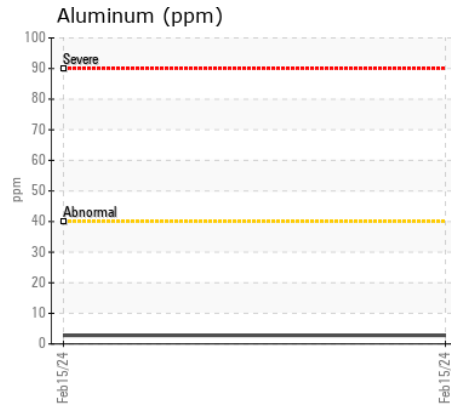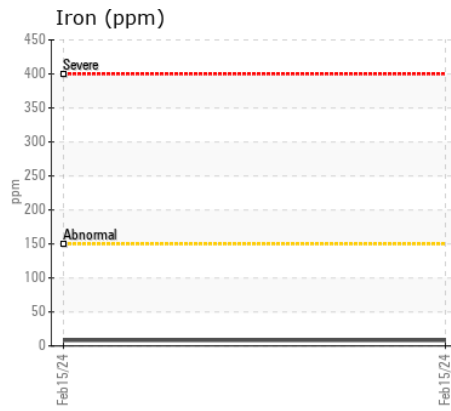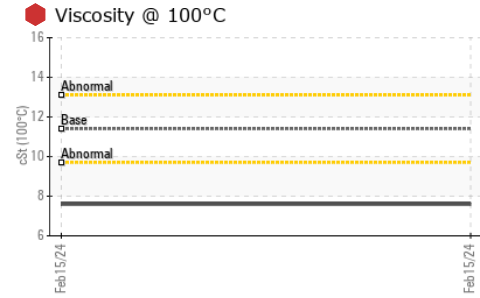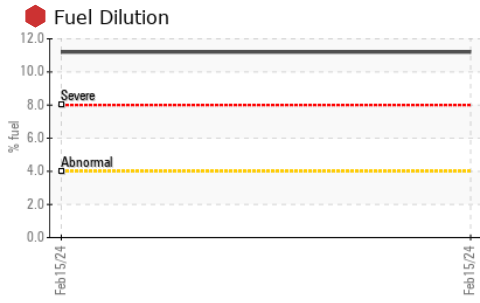

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0097577 **Received** : 16 Feb 2024
Lab Number : 02616175 **Tested** : 20 Feb 2024
Unique Number : 5733285 **Diagnosed** : 20 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, Visual)

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 1Y9
 Contact: Natalia Stalynska
 nstalynska@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: