



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
264-1902
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | WC0423839 | --- | --- |
| Sample Date | | Client Info | | 09 Feb 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 2872 | --- | --- |
| Oil Age | hrs | Client Info | | 627 | --- | --- |
| Filter Age | hrs | Client Info | | 627 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|----------|-----|---------------|------|----|-----|-----|
| Iron | ppm | ASTM D5185(m) | >100 | 14 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >4 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >40 | 20 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >330 | 2 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|------|------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >25 | 8 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 15 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | ASTM D7844* | >3 | 0.1 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | >20 | 7.7 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 22.8 | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|--------------|----------|---------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185(m) | >118 | 1 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 32 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 39 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 481 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 1690 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 720 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 829 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 2143 | --- | --- |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 21.2 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | | 12.4 | --- | --- |

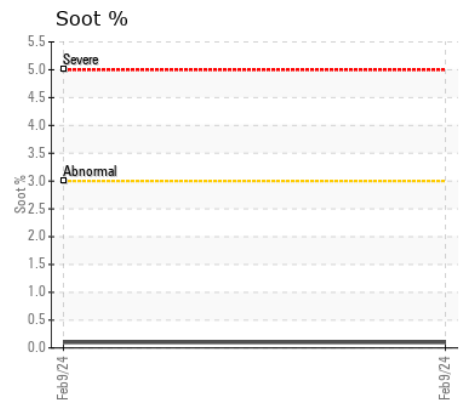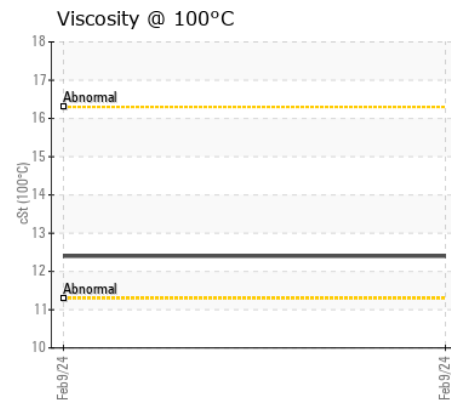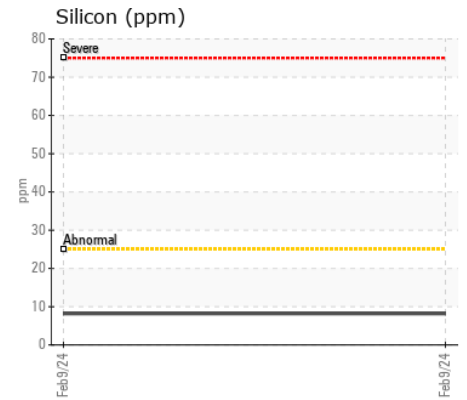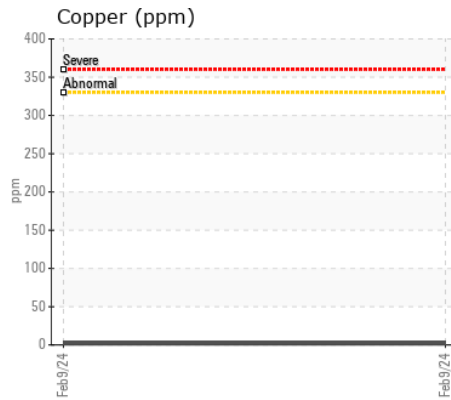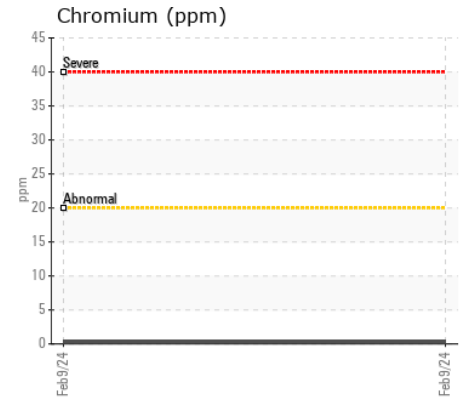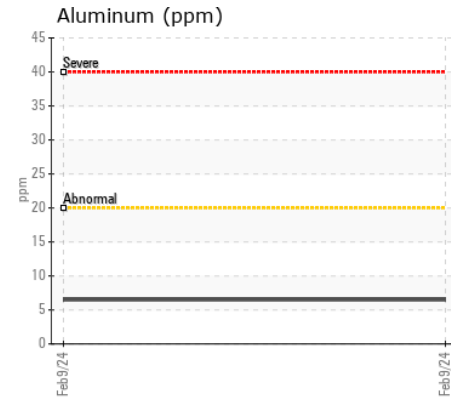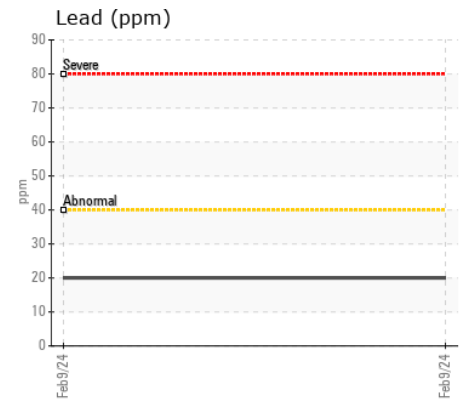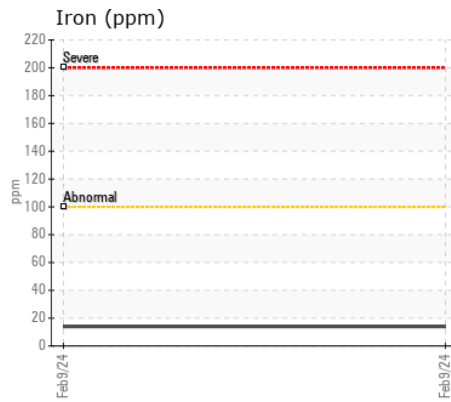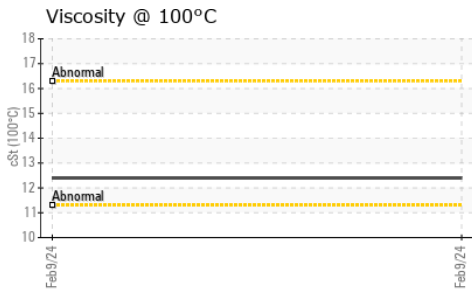

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0423839
Lab Number : 02616179
Unique Number : 5733289
Test Package : MOB 1
Received : 16 Feb 2024
Tested : 16 Feb 2024
Diagnosed : 16 Feb 2024 - Wes Davis

E.C. KING CONTRACTING
 2125 - 20TH AVENUE EAST
 OWEN SOUND, ON
 CA N4K 5P7
 Contact: Pierre Valley
 Pierre.valley@millergroup.ca
 T: (519)376-6140
 F: (519)376-8560

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.