



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ALLISON 231
Component
Rear Transmission (Auto)
Fluid
CASTROL TRANSYND (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0889144	WC0866495	WC0866465
Sample Date		Client Info		14 Feb 2024	21 Dec 2023	03 Nov 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		29167	19110	9447
Filter Age	kms	Client Info		29167	19110	9447
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184*	>105	0	---	0
Iron	ppm	ASTM D5185(m)	>230	35	30	33
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>65	5	5	5
Lead	ppm	ASTM D5185(m)	>55	1	1	2
Copper	ppm	ASTM D5185(m)	>85	6	6	7
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	8	8	6
Potassium	ppm	ASTM D5185(m)	>20	1	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185(m)		3	3	3
Boron	ppm	ASTM D5185(m)	150	75	75	82
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	1	1	<1
Calcium	ppm	ASTM D5185(m)	40	128	126	127
Phosphorus	ppm	ASTM D5185(m)	320	241	236	242
Zinc	ppm	ASTM D5185(m)	5	3	3	4
Sulfur	ppm	ASTM D5185(m)	1050	1648	1593	1566
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	1.08	1.09	0.92
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	32.8	32.2	33.1
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	6.5	6.6	6.6
Viscosity Index (VI)	Scale	ASTM D2270*	168	156	166	159

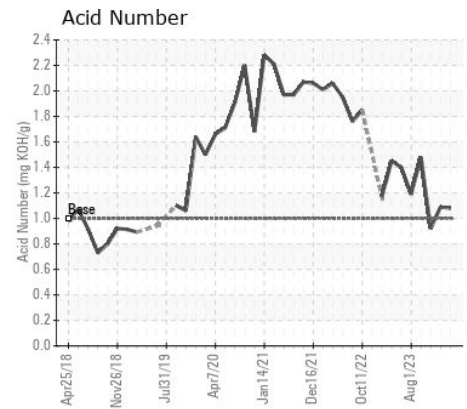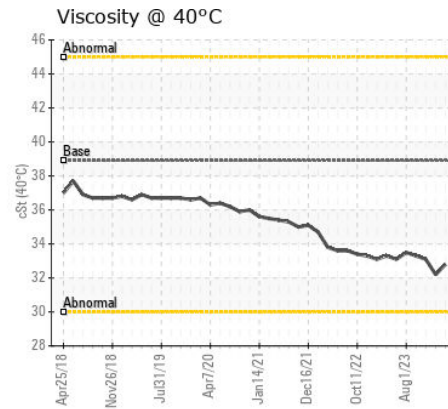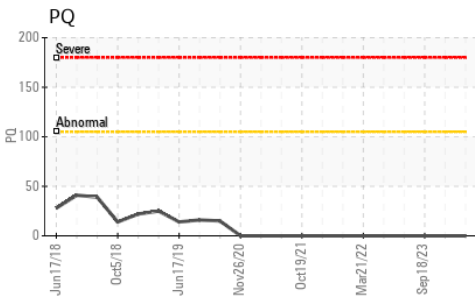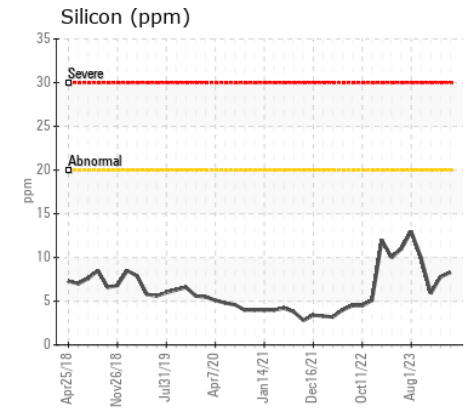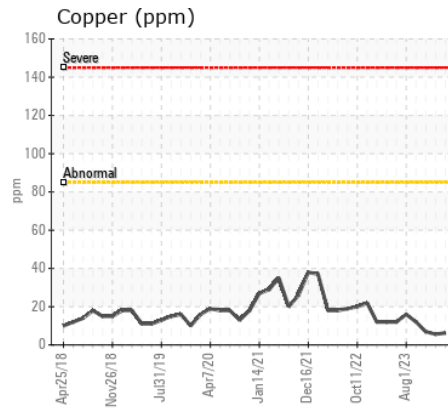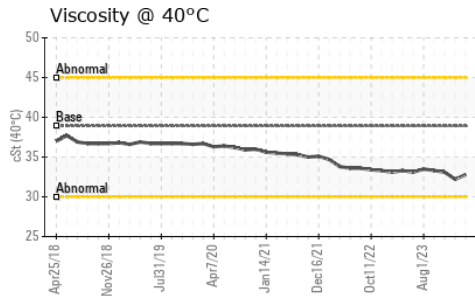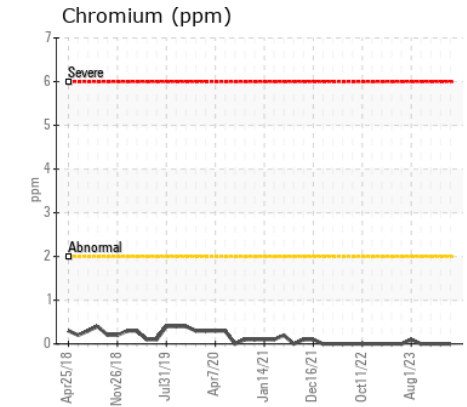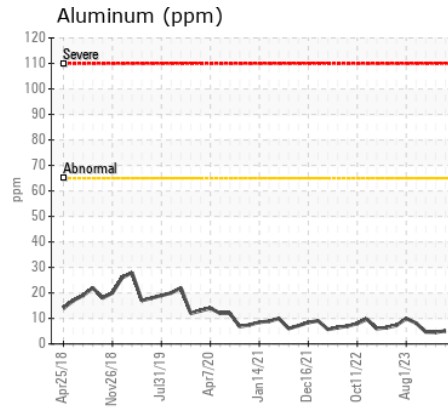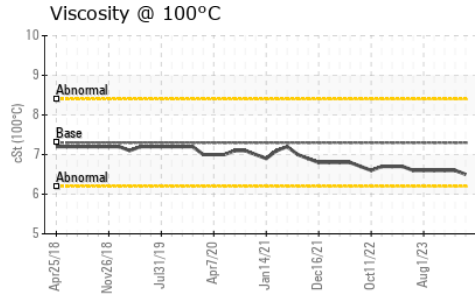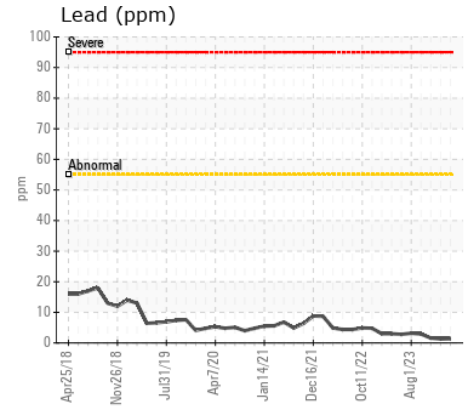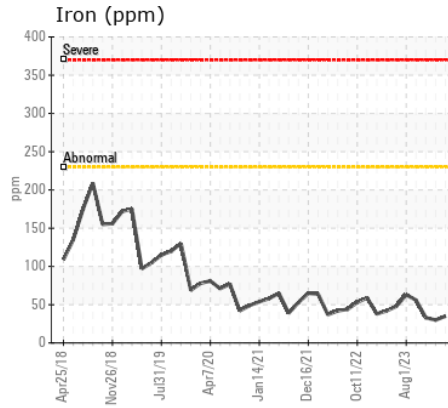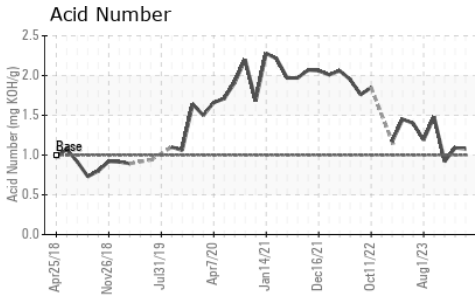

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889144 **Received** : 20 Feb 2024
Lab Number : 02616713 **Tested** : 21 Feb 2024
Unique Number : 5733823 **Diagnosed** : 21 Feb 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.