



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LR636 018081-1275
Component
Splitter Box
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0285084	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	hrs	Client Info		5913	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	58	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>30	0	---	---
Copper	ppm	ASTM D5185(m)	>20	1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	12	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water	%	ASTM D6304*	>0.1	0.027	---	---
ppm Water	ppm	ASTM D6304*	>1000	278	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	LIGHT	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	.2%	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<1	---	---
Boron	ppm	ASTM D5185(m)	400	269	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	12	3	---	---
Calcium	ppm	ASTM D5185(m)	150	24	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1262	---	---
Zinc	ppm	ASTM D5185(m)	125	52	---	---
Sulfur	ppm	ASTM D5185(m)	22500	20329	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	91.9	---	---

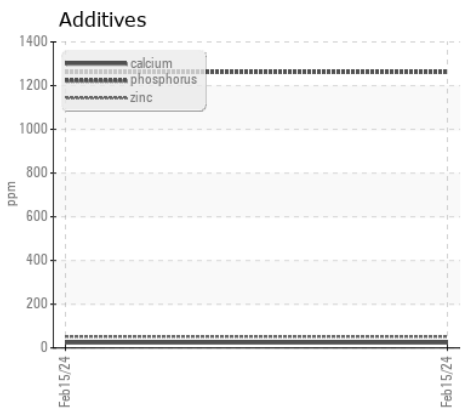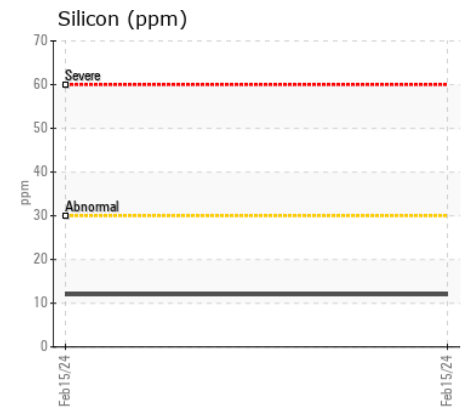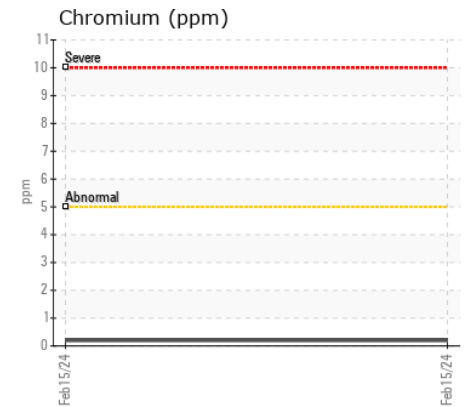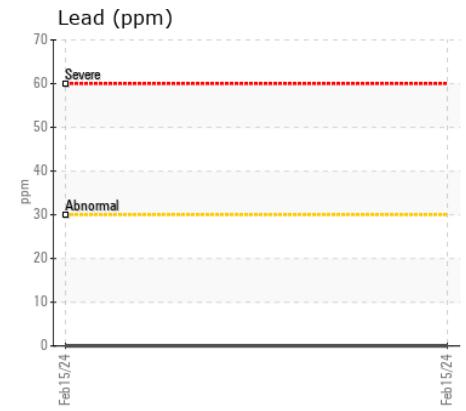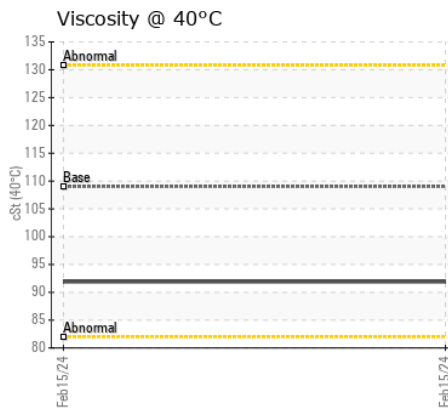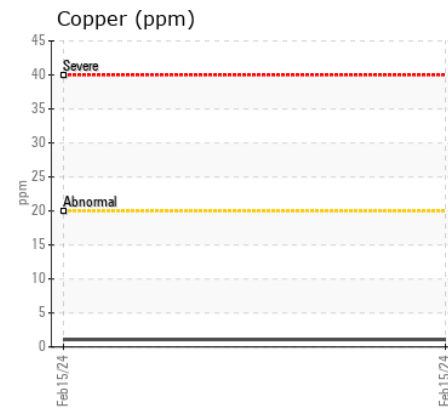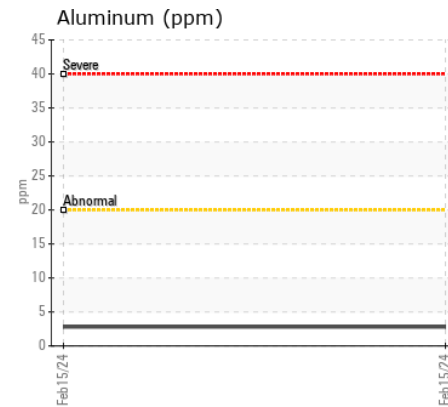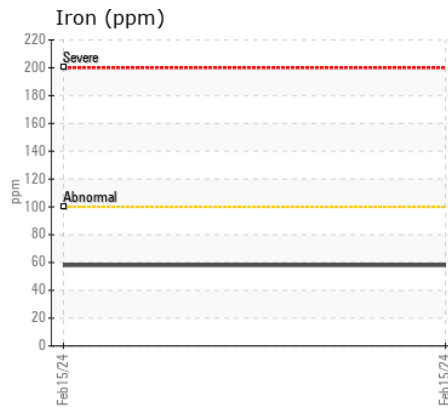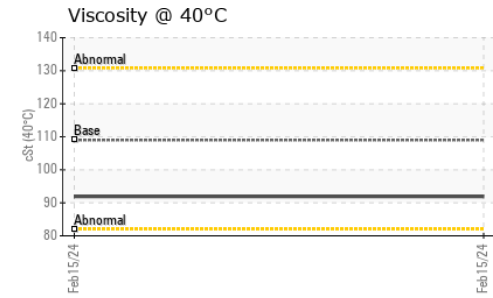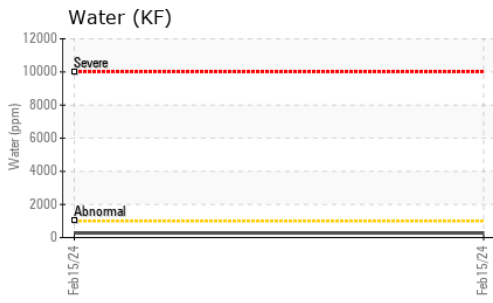

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0285084 **Received** : 20 Feb 2024
Lab Number : 02616726 **Tested** : 21 Feb 2024
Unique Number : 5733836 **Diagnosed** : 21 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KF)

CON-DRAIN LTD.
 30 FLORAL PARKWAY
 CONCORD, ON
 CA L4K 4R1
 Contact: B BAXTER
 B.BAXTER@CONDRAIN.COM

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: