



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
23-M-01-2499

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0795468	---	---
Sample Date		Client Info		09 Feb 2024	---	---
Machine Age	hrs	Client Info		263	---	---
Oil Age	hrs	Client Info		263	---	---
Filter Age	hrs	Client Info		163	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	<1	---	---
Copper	ppm	ASTM D5185(m)	>20	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	2430	---	---
Particles >6µm		ASTM D7647	>1300	517	---	---
Particles >14µm		ASTM D7647	>160	38	---	---
Particles >21µm		ASTM D7647	>40	7	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	1	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	2	---	---
Calcium	ppm	ASTM D5185(m)	100	104	---	---
Phosphorus	ppm	ASTM D5185(m)	670	641	---	---
Zinc	ppm	ASTM D5185(m)	850	815	---	---
Sulfur	ppm	ASTM D5185(m)	1600	1669	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	45.7	---	---

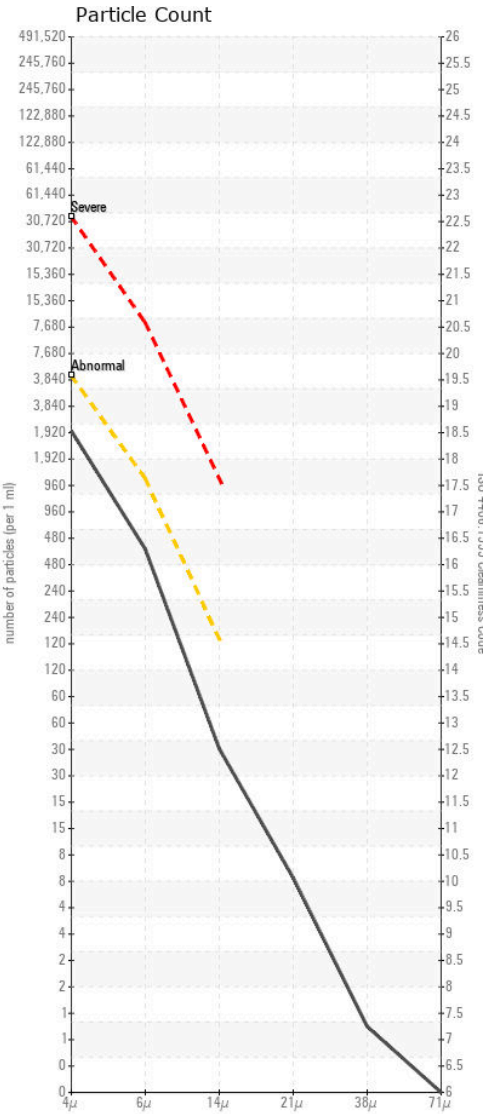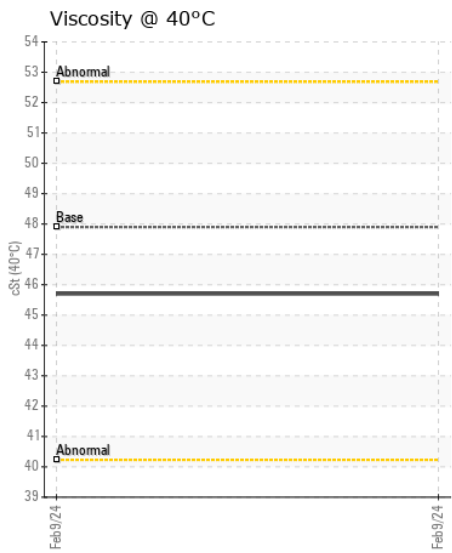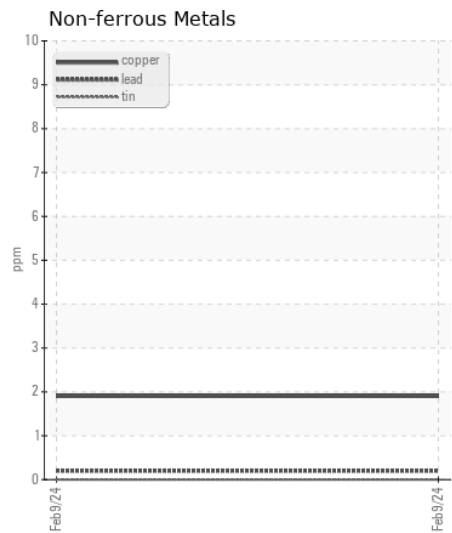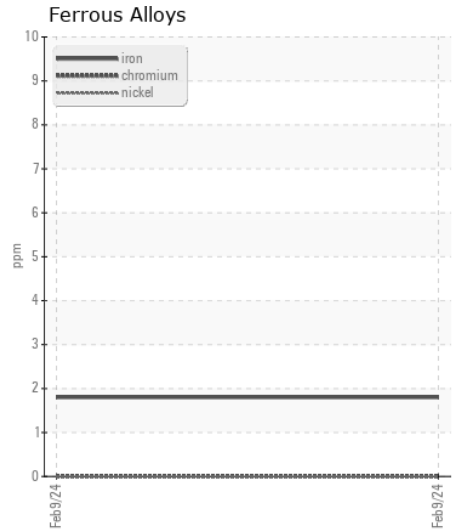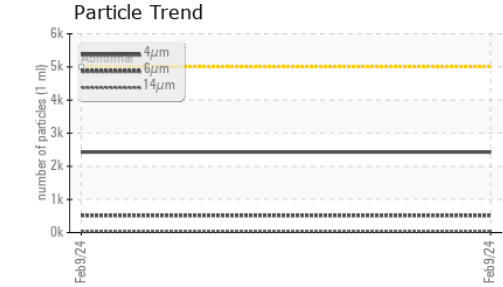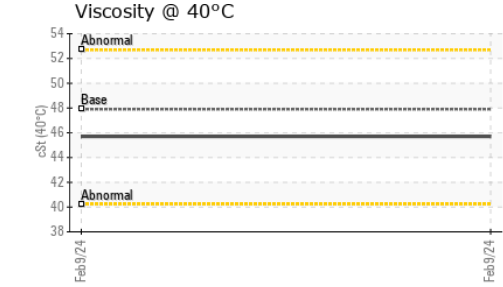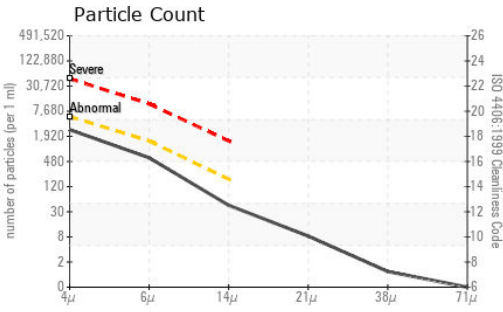

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0795468 **Received** : 23 Feb 2024
Lab Number : 02617690 **Tested** : 26 Feb 2024
Unique Number : 5734800 **Diagnosed** : 26 Feb 2024 - Wes Davis
Test Package : MOB 2

RWF Industries
 873 Devonshire Ave.
 Woodstock, ON
 CA N4S 8Z4
 Contact: Tami Arnold
 tamia@rwfbron.com
 T:
 F: (519)421-0028

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.