



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(374940)
Machine Id
LIEBHERR LH30M 137944-1253
Component
Front Right Wheel Hub
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0278721	LH0239299	---
Sample Date		Client Info		22 Feb 2024	31 Aug 2022	---
Machine Age	hrs	Client Info		2777	551	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	23	14	---
Chromium	ppm	ASTM D5185(m)	>4	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>2	0	0	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>15	1	1	---
Lead	ppm	ASTM D5185(m)	>4	<1	<1	---
Copper	ppm	ASTM D5185(m)	>75	17	13	---
Tin	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	5	7	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	17	---
Boron	ppm	ASTM D5185(m)		145	97	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)		5	10	---
Calcium	ppm	ASTM D5185(m)		1318	3490	---
Phosphorus	ppm	ASTM D5185(m)		1419	1181	---
Zinc	ppm	ASTM D5185(m)		515	1345	---
Sulfur	ppm	ASTM D5185(m)		14907	2881	---
Visc @ 40°C	cSt	ASTM D7279(m)		94.4	64.5	---

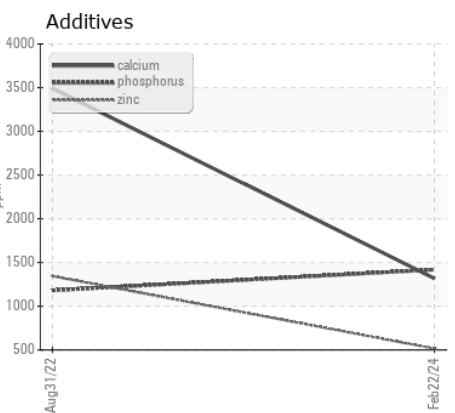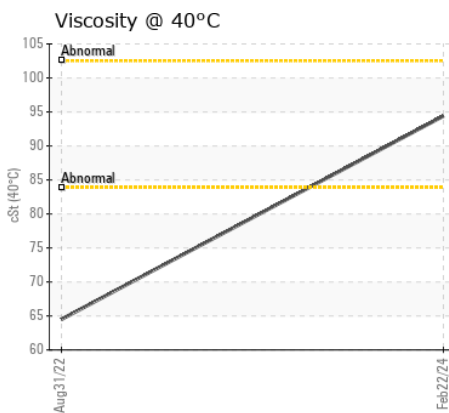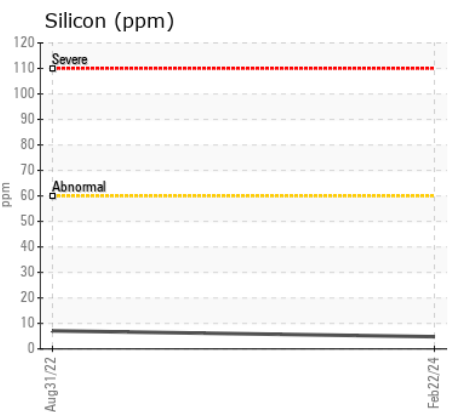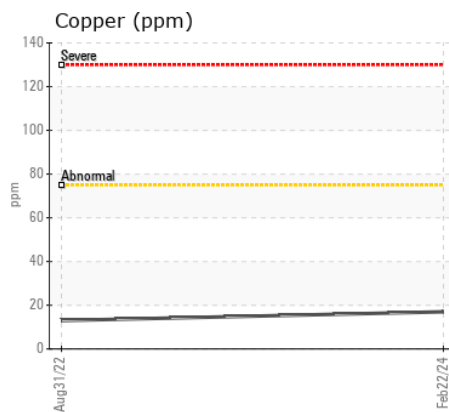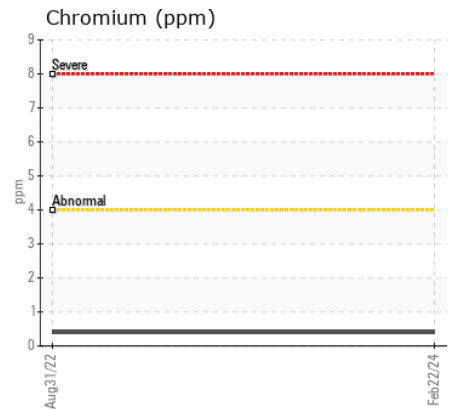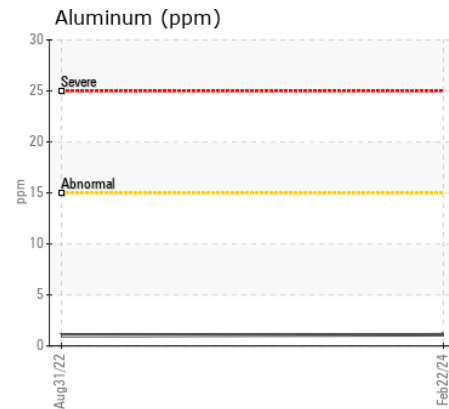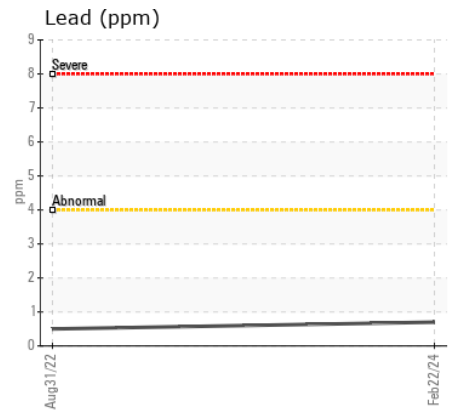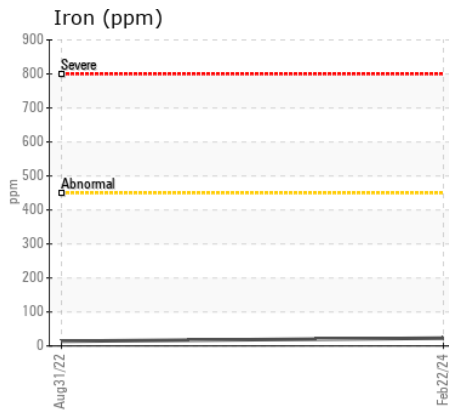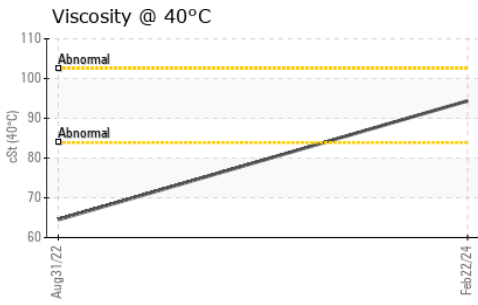

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0278721
Lab Number : 02617729
Unique Number : 5734839
Test Package : MOB 1
Received : 23 Feb 2024
Tested : 23 Feb 2024
Diagnosed : 23 Feb 2024 - Wes Davis

KINGS AUTO WRECKERS
 1866 DRUMMOND LINE
 PETERBOROUGH, ON
 CA K9J 6X8
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: