



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	NORMAL

Area
(C-GHOV)
Machine Id
[C-GHOV] AIRBUS H125 53818
Component
Jet Turbine
Fluid
MOBIL JET OIL 254 (6 LTR)

RECOMMENDATION



Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0847682	---	---
Sample Date		Client Info		09 Feb 2024	---	---
TSN	hrs	Client Info		558	---	---
TSO	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		558	---	---
Filter Age	hrs	Client Info		558	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

Iron	ppm	ASTM D5185(m)	>8	<1	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>2	<1	---	---
Lead	ppm	ASTM D5185(m)	>3	0	---	---
Copper	ppm	ASTM D5185(m)	>3	<1	---	---
Tin	ppm	ASTM D5185(m)	>2	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Large Particles		DR-Ferr*		4.8	---	---
Small Particles		DR-Ferr*		4.7	---	---
Total Particles		DR-Ferr*	>---	9.5	---	---
Large Particles Percentage	%	DR-Ferr*		1.1	---	---
Severity Index		DR-Ferr*		0	---	---
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

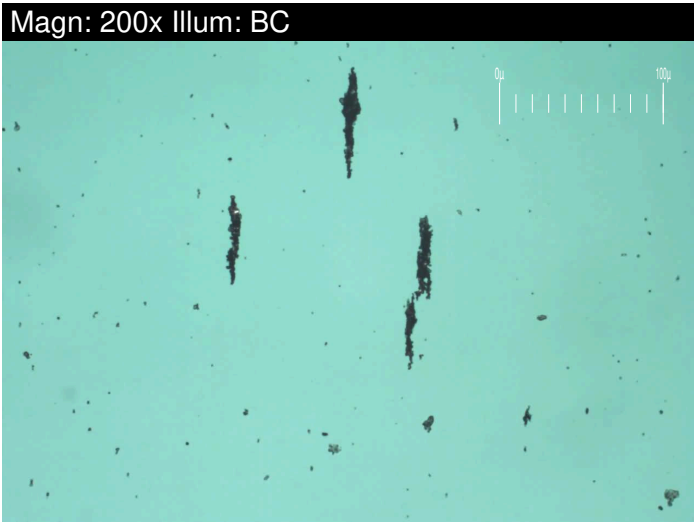

CONTAMINANTS

The water content is negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>8	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water	%	ASTM D6304*	>0.1	0.023	---	---
ppm Water	ppm	ASTM D6304*	>1000	240	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*				
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1		

OIL CONDITION


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	<1	---	---
Calcium	ppm	ASTM D5185(m)	0	0	---	---
Phosphorus	ppm	ASTM D5185(m)	3000	2838	---	---
Zinc	ppm	ASTM D5185(m)	0	13	---	---
Sulfur	ppm	ASTM D5185(m)	0	183	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.08	0.04	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.4	27.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.3	5.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	137	131	---	---
Lubricant Degradation	Scale 0-10	ASTM D7684*				

Ferrous Alloys

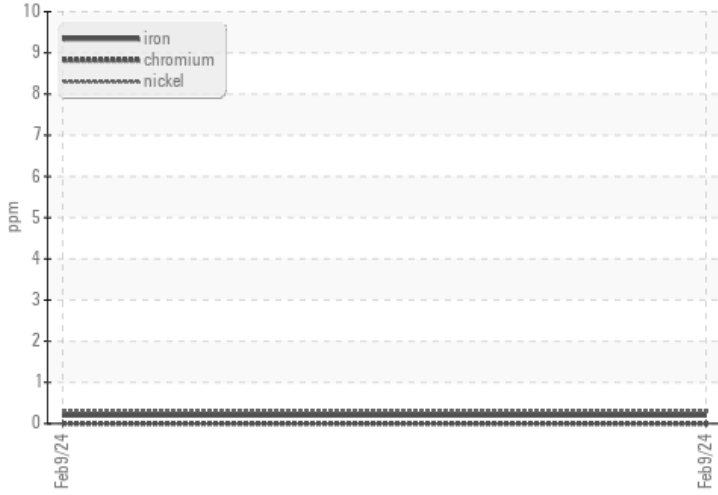


Non-ferrous Metals

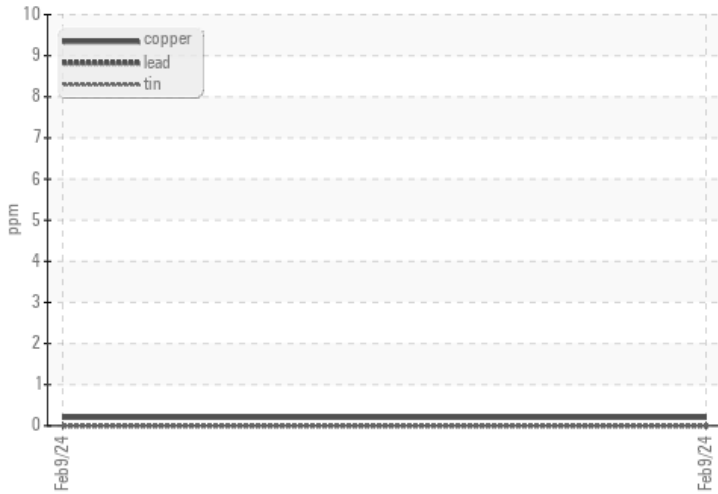

Viscosity @ 40°C



Acid Number

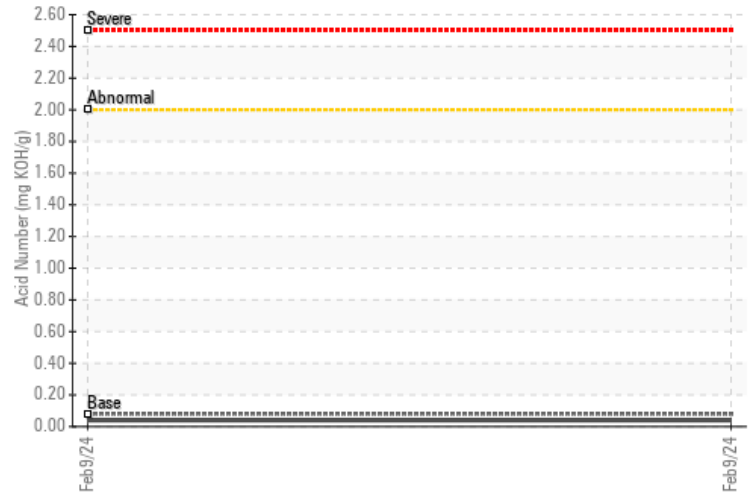

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0847682
Lab Number : 02618021
Unique Number : 5735131
Test Package : AVI 3

HYDRO ONE HELICOPTERS
 LAKE SIMCOE REGIONAL AIRPORT, 224 LINE 7 N.
 ORO STATION, ON
 CA L0L 2E0
 Contact: Ken Sanford
 ken.sanford@hydroone.com
 T: (705)487-1771
 F: (705)487-5817

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank