



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL218
Machine Id
734006
Component
Diesel Engine
Fluid
{not provided} (26 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113180	---	---
Sample Date		Client Info		22 Feb 2024	---	---
Machine Age	kms	Client Info		7260	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>80	32	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>30	3	---	---
Lead	ppm	ASTM D5185(m)	>30	1	---	---
Copper	ppm	ASTM D5185(m)	>150	11	---	---
Tin	ppm	ASTM D5185(m)	>5	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	22	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.8	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		24	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		80	---	---
Manganese	ppm	ASTM D5185(m)		8	---	---
Magnesium	ppm	ASTM D5185(m)		591	---	---
Calcium	ppm	ASTM D5185(m)		1267	---	---
Phosphorus	ppm	ASTM D5185(m)		686	---	---
Zinc	ppm	ASTM D5185(m)		787	---	---
Sulfur	ppm	ASTM D5185(m)		2284	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		13.8	---	---

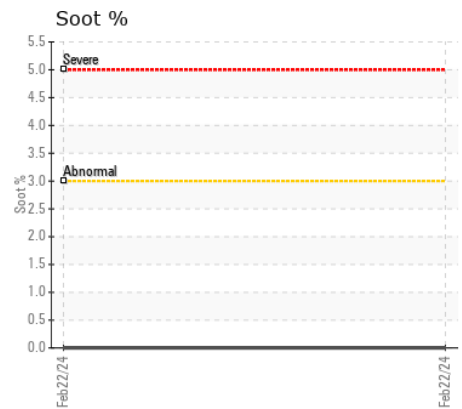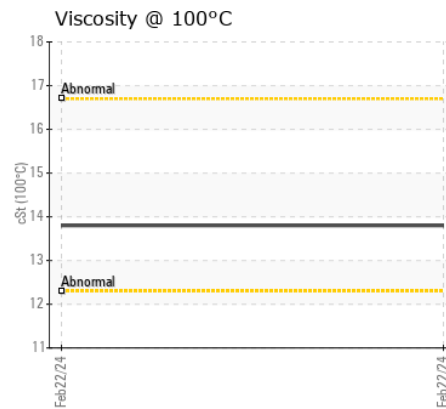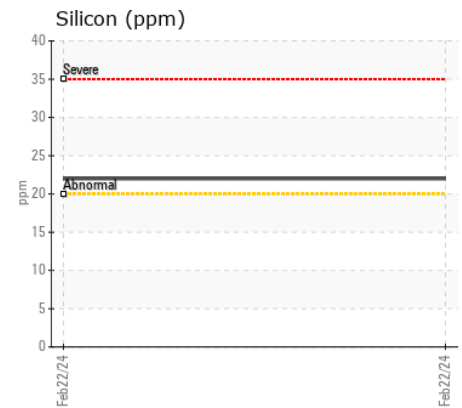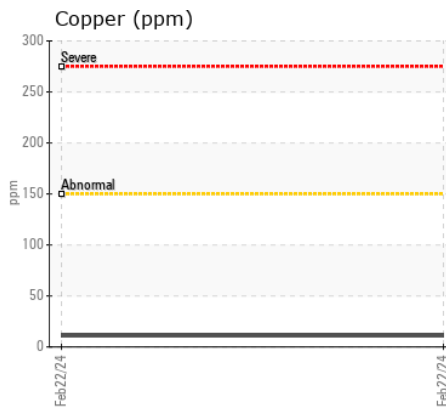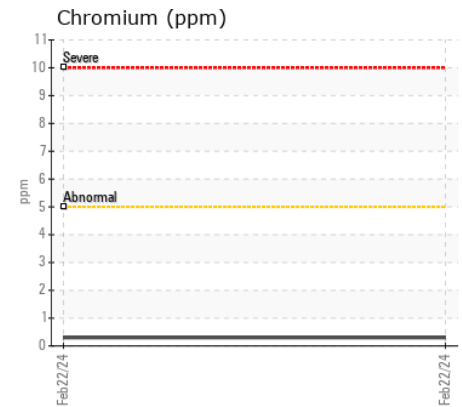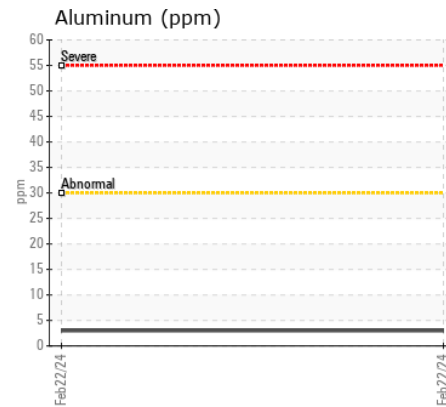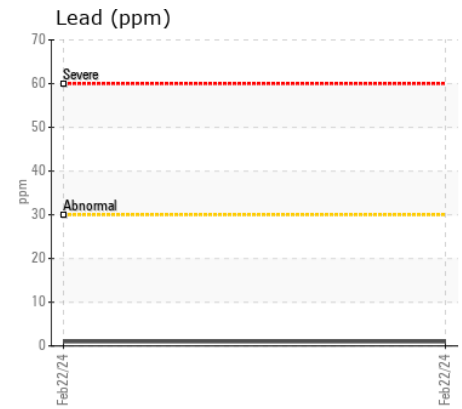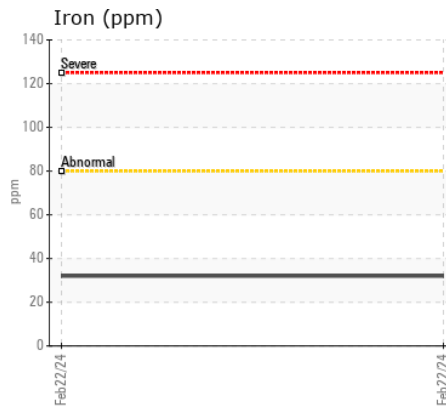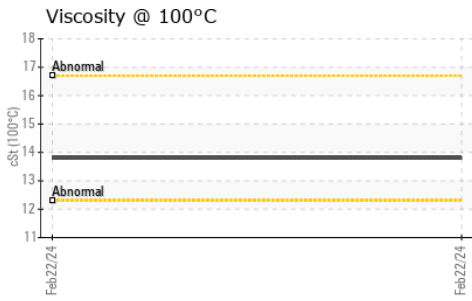

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113180
Lab Number : 02618561
Unique Number : 5735671
Test Package : MOB 1
Received : 28 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Kevin Marson

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.