



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(351064)
Machine Id
122398-1216
Component
Diesel Engine
Fluid
PETRO CANADA SUPREME 5W30 (25 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281254	LH0276908	LH0202595
Sample Date		Client Info		07 Feb 2024	31 Oct 2023	20 Oct 2021
Machine Age	hrs	Client Info		5387	5000	584
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	6	4	19
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	2	1	2
Lead	ppm	ASTM D5185(m)	>30	<1	2	10
Copper	ppm	ASTM D5185(m)	>125	2	2	158
Tin	ppm	ASTM D5185(m)	>5	0	<1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	6	6	11
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	5
Fuel		WC Method	>5	<1.0	<1.0	0.9
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.4	9.1	11.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.3	20.0	40.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	2	3
Boron	ppm	ASTM D5185(m)	186	29	2	70
Barium	ppm	ASTM D5185(m)	<1	0	0	28
Molybdenum	ppm	ASTM D5185(m)	79	55	59	45
Manganese	ppm	ASTM D5185(m)	0	0	0	2
Magnesium	ppm	ASTM D5185(m)	578	1079	994	923
Calcium	ppm	ASTM D5185(m)	1002	848	1049	1323
Phosphorus	ppm	ASTM D5185(m)	745	1035	1030	625
Zinc	ppm	ASTM D5185(m)	837	1170	1206	803
Sulfur	ppm	ASTM D5185(m)	2502	3013	2710	1816
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.2	17.5	48.8
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	11.8	12.8	11.3

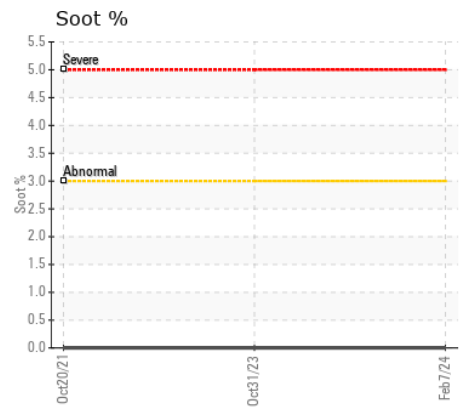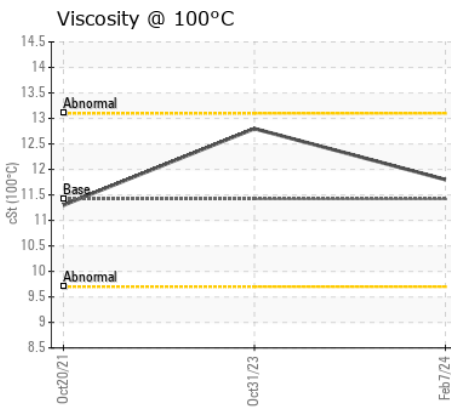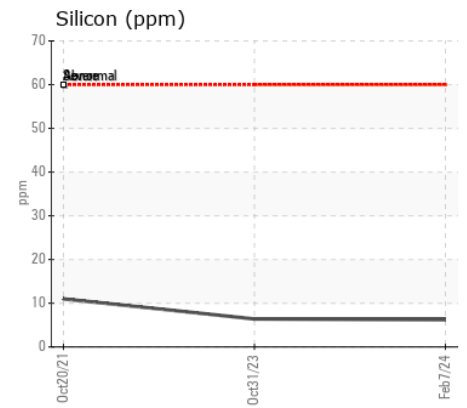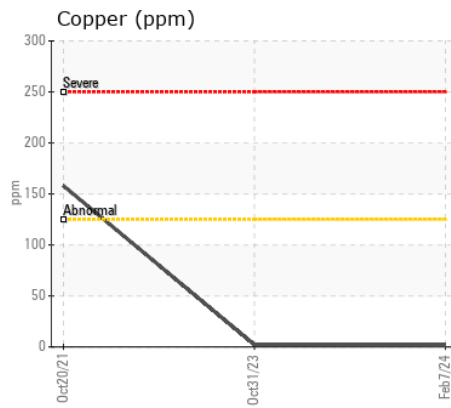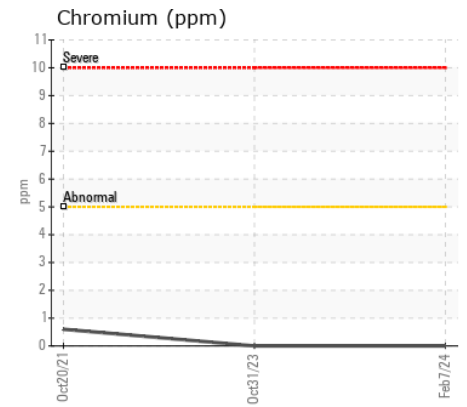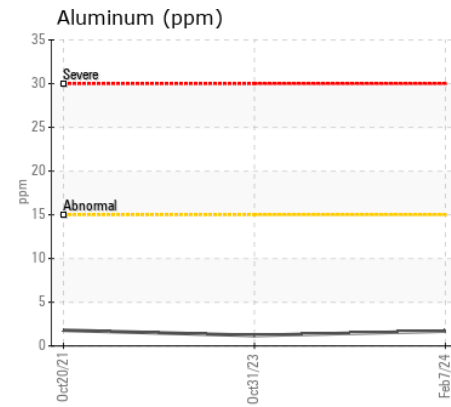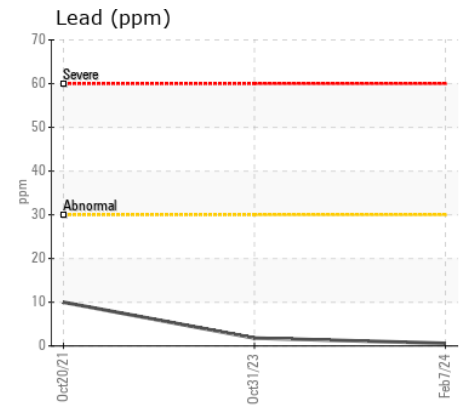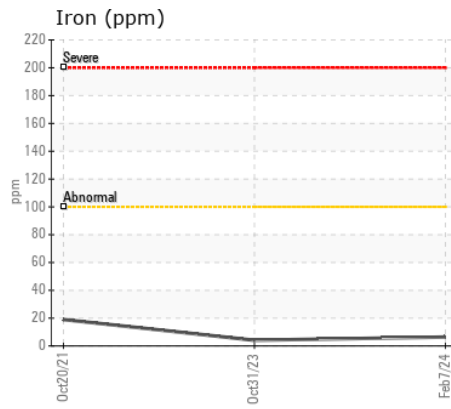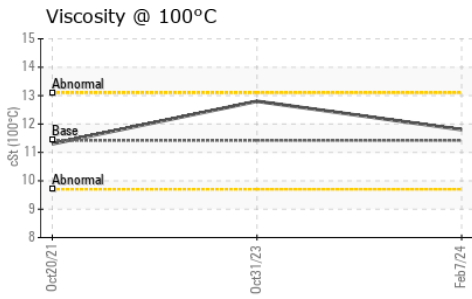

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281254 **Received** : 01 Mar 2024
Lab Number : 02619188 **Tested** : 01 Mar 2024
Unique Number : 5736298 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1

American Iron and Metal
 75 Steel City Court
 Hamilton, ON
 CA L8H 3Y2
 Contact: Heavy Equipment
 hamiltonmobileassetmaintenance@aim-recycling.com
 T: (905)547-5533
 F: (905)544-5671

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.