



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(FQQA)
Machine Id
[FQQA] CESSNA C-150 199064-8-A
Component
Piston Aircraft Engine
Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (6 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0841060	WC0749497	WC0622552
Sample Date		Client Info		18 Feb 2024	17 Dec 2022	15 Nov 2021
TSN	hrs	Client Info		2401	2380	2343
TSO	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		21	38	16
Filter Age	hrs	Client Info		21	38	16
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	55	51	24
Chromium	ppm	ASTM D5185(m)	>20	2	4	2
Nickel	ppm	ASTM D5185(m)	>15	1	1	1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	6	5	2
Lead	ppm	ASTM D5185(m)	>20000	1504	2607	1585
Copper	ppm	ASTM D5185(m)	>25	2	3	2
Tin	ppm	ASTM D5185(m)	>30	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	7	8	8
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	.1%

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		0	<1	0
Boron	ppm	ASTM D5185(m)		0	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		<1	2	1
Manganese	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)		4	7	1
Calcium	ppm	ASTM D5185(m)		4	1	3
Phosphorus	ppm	ASTM D5185(m)		<1	1	2
Zinc	ppm	ASTM D5185(m)		4	5	4
Sulfur	ppm	ASTM D5185(m)		1085	1063	926
Visc @ 100°C	cSt	ASTM D7279(m)	19.8	18.9	18.7	20.1

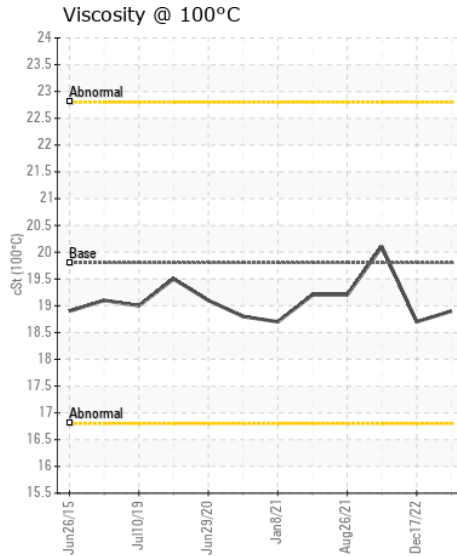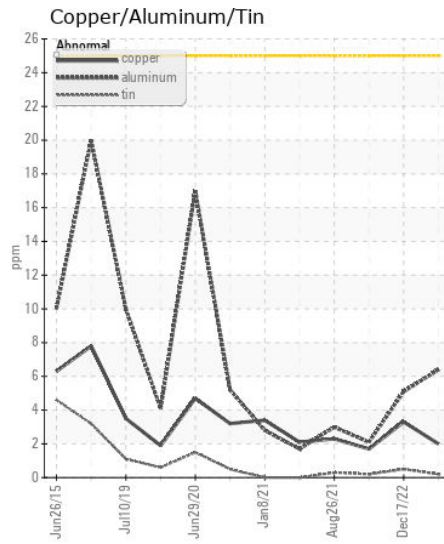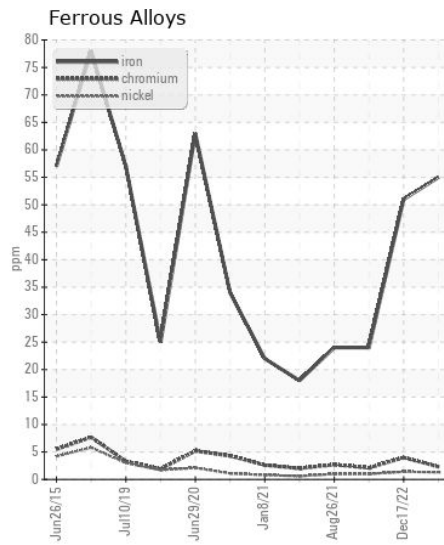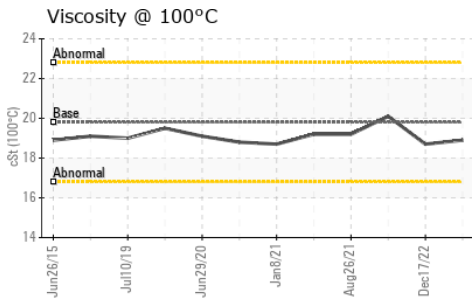

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0841060
Lab Number : 02619916
Unique Number : 5737026
Test Package : AVI 1
Received : 05 Mar 2024
Tested : 05 Mar 2024
Diagnosed : 05 Mar 2024 - Kevin Marson

CORPORATE AIRCRAFT RESTORATIONS
 481 AVIATOR LANE
 OSHAWA, ON
 CA L1J 0B8
 Contact: Maurice Nesbitt
 hangar@bellnet.ca
 T: (905)434-5173
 F: (905)983-9599

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.