



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**AHTW #4 (S/N 50348)**

Component  
**Hydraulic System**

Fluid  
**CASTROL HYSPIN AWS HYDRAULIC 100 (1000 LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid. this testkit includes AN to determine the suitability of the oil for continued use.

## WEAR

All component wear rates are normal.

## CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

## FLUID CONDITION





The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0787203</b>	WC0474230	WC0643453
Sample Date		Client Info		<b>22 Feb 2024</b>	05 Feb 2023	02 Feb 2022
Machine Age	hrs	Client Info		<b>19992</b>	3042	3011
Oil Age	hrs	Client Info		<b>0</b>	3011	0
Filter Age	hrs	Client Info		<b>19992</b>	3011	0
Oil Changed		Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>75	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	<1
Boron	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>48</b>	50	50
Phosphorus	ppm	ASTM D5185(m)		<b>376</b>	411	393
Zinc	ppm	ASTM D5185(m)		<b>456</b>	464	475
Sulfur	ppm	ASTM D5185(m)		<b>6824</b>	6590	6590
Visc @ 40°C	cSt	ASTM D7279(m)	103.6	<b>97.6</b>	98.3	98.8

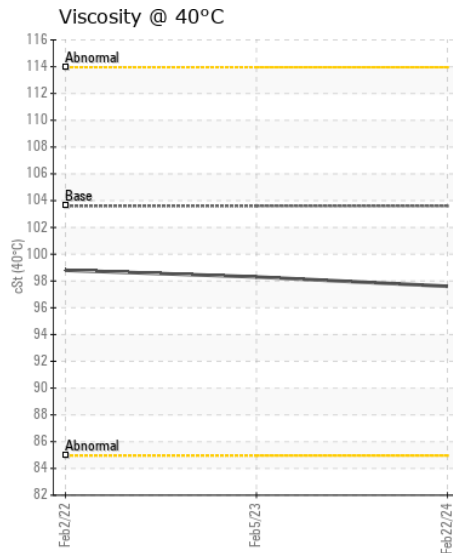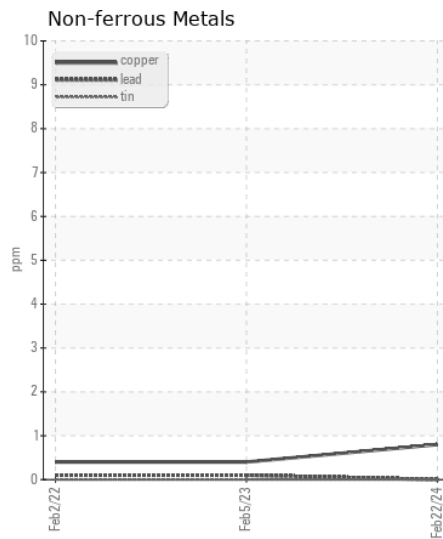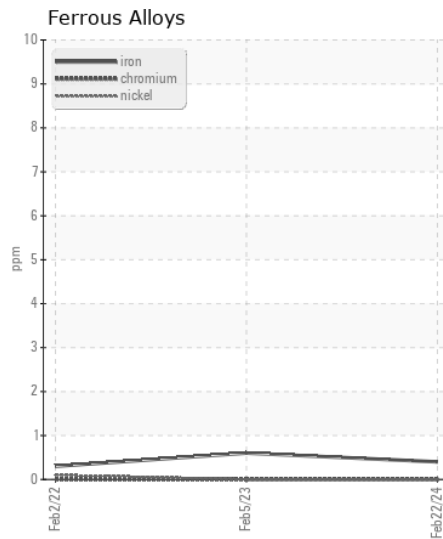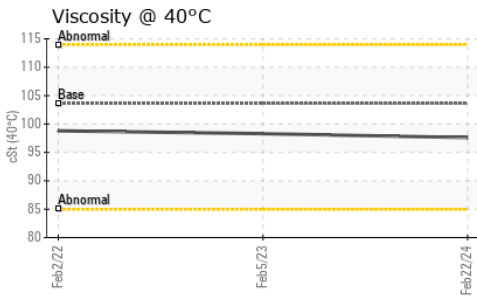

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0787203  
**Lab Number** : 02619934  
**Unique Number** : 5737044  
**Test Package** : MAR 1

**Horizon Maritime Services Ltd. - K.J. Gardner**  
 101 Research Drive, Main Floor  
 Dartmouth, NS  
 CA B2Y 4T6  
 Contact: Engine Room  
 chiefeng.kjgardner@horizonmaritime.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: