

Machine Id
FREIGHTLINER 520050
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (43 GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113475	GFL0100816	GFL0091105
Sample Date		Client Info		01 Mar 2024	20 Nov 2023	22 Sep 2023
Machine Age	hrs	Client Info		12632	12049	11648
Oil Age	hrs	Client Info		583	401	600
Filter Age	hrs	Client Info		583	401	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>200	16	13	17
Chromium	ppm	ASTM D5185(m)	>20	2	2	2
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>30	12	8	13
Lead	ppm	ASTM D5185(m)	>30	<1	0	<1
Copper	ppm	ASTM D5185(m)	>30	4	3	4
Tin	ppm	ASTM D5185(m)	>15	<1	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>30	5	6	5
Potassium	ppm	ASTM D5185(m)	>20	5	5	13
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.2	0.4
Nitration	Abs/cm	ASTM D7624*	>20	9.2	8.4	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.3	20.6	21.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	250	7	8	7
Barium	ppm	ASTM D5185(m)	10	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	64	64	68
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	450	939	961	1009
Calcium	ppm	ASTM D5185(m)	3000	1109	1105	1154
Phosphorus	ppm	ASTM D5185(m)	1150	1002	1011	1014
Zinc	ppm	ASTM D5185(m)	1350	1187	1215	1244
Sulfur	ppm	ASTM D5185(m)	4250	2427	2403	2352
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.3	16.5	17.2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	10.9	11.1	11.3

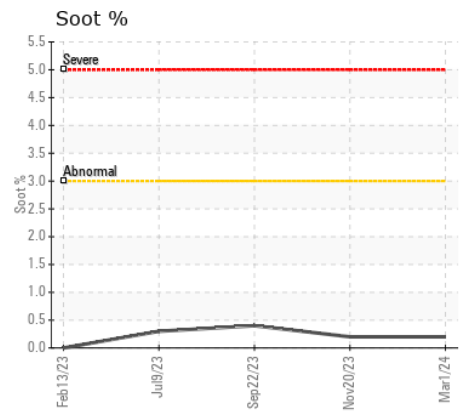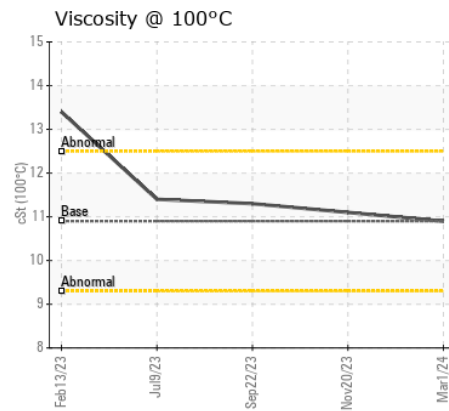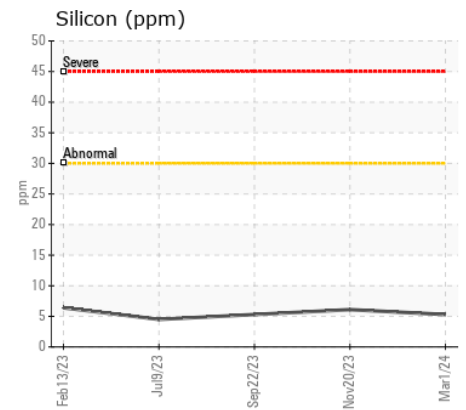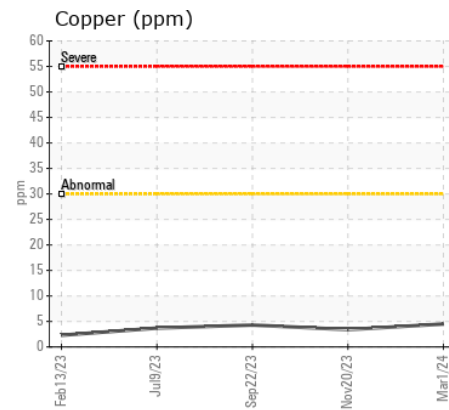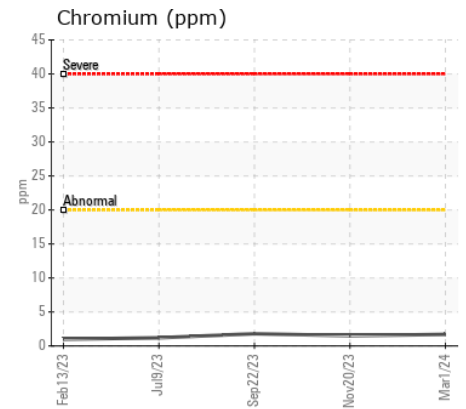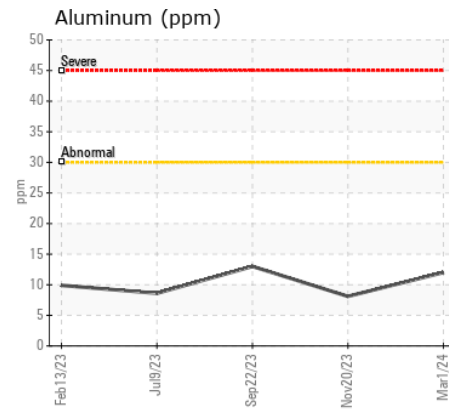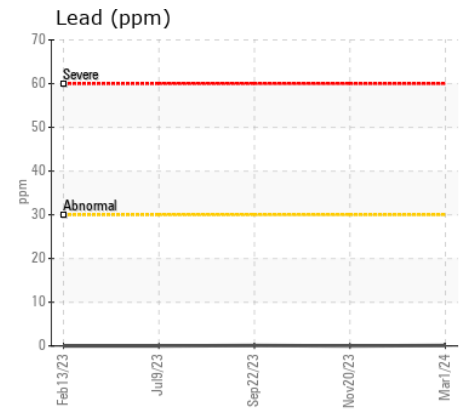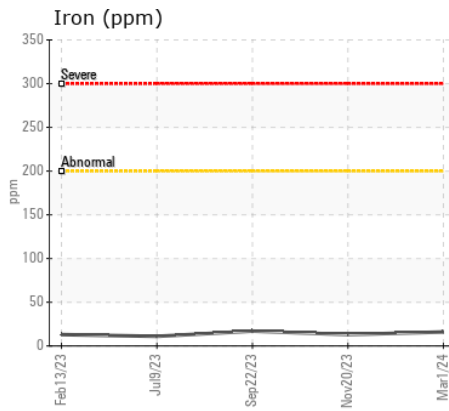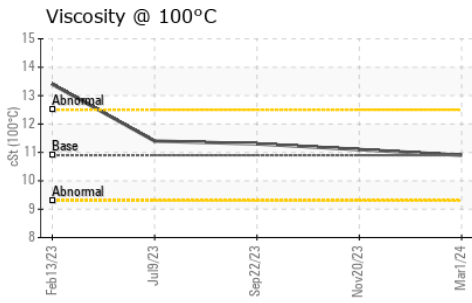

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113475
Lab Number : 02620485
Unique Number : 5737595
Test Package : MOB 1
Received : 07 Mar 2024
Tested : 07 Mar 2024
Diagnosed : 07 Mar 2024 - Kevin Marson

GFL Environmental 791MAT - Matane
 29 rue Brilliant
 Matane, QC
 CA G4W 0J7
 Contact: B Berube
 bberube@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: