



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
430 KING ST PRESTON BELL CANADA 16301002061

Component
Left Diesel Engine

Fluid
ESSO XD-3 EXTRA 15W40 (60 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PN0005787	PN0004590	PN0003352
Sample Date		Client Info		04 Mar 2024	29 Mar 2023	09 Mar 2022
Machine Age	hrs	Client Info		289	235	0
Oil Age	hrs	Client Info		54	0	0
Filter Age	hrs	Client Info		54	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<1	1	1
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	3	2
Lead	ppm	ASTM D5185(m)	>40	<1	<1	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	4.7	5.9	6.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.3	19.0	18.6
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	1	2	2
Boron	ppm	ASTM D5185(m)		15	80	80
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		60	84	77
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		774	69	112
Calcium	ppm	ASTM D5185(m)	3780	1241	2287	2022
Phosphorus	ppm	ASTM D5185(m)	1370	1036	1114	1025
Zinc	ppm	ASTM D5185(m)	1500	1159	1146	1116
Sulfur	ppm	ASTM D5185(m)	3800	2907	3376	3177
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.4	9.8	12.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.6	14.1	14.4

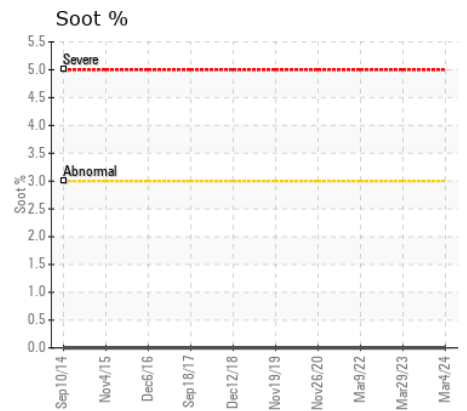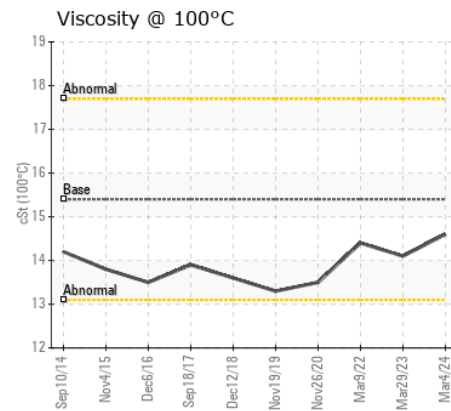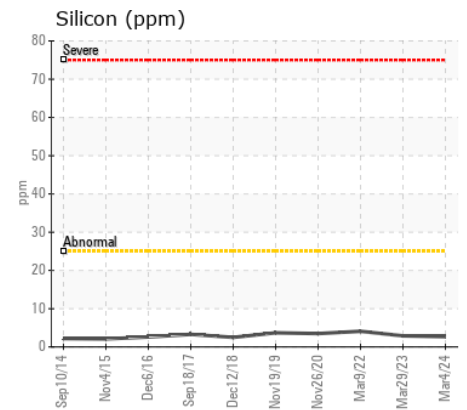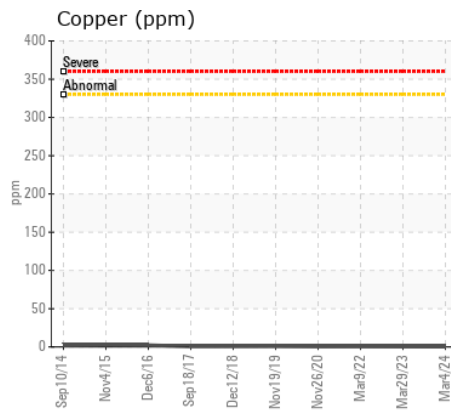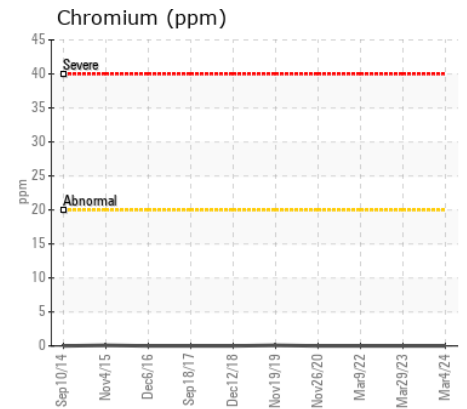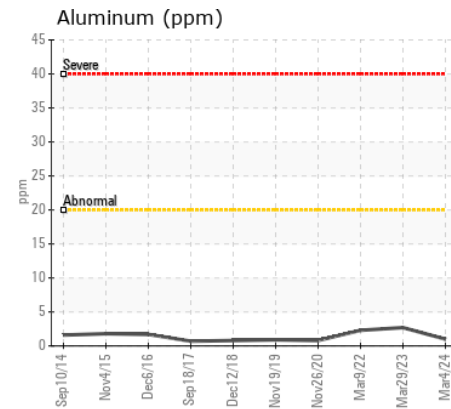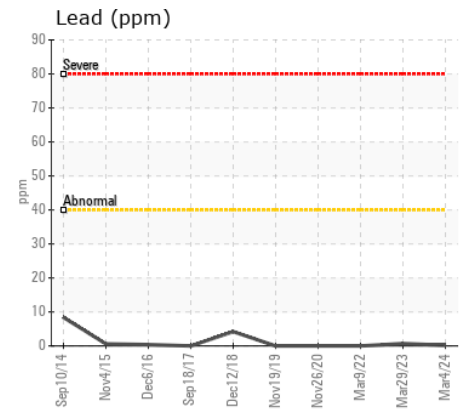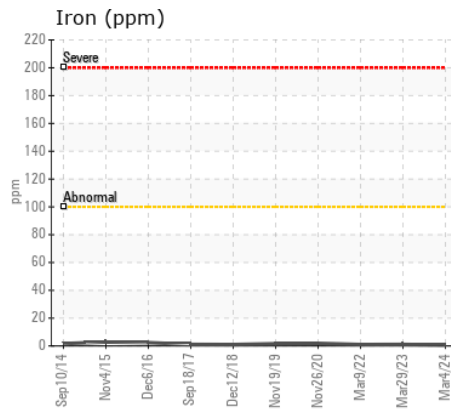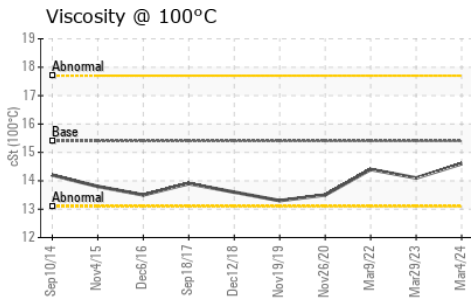

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PN0005787
Lab Number : 02620489
Unique Number : 5737599
Test Package : MOB 1 (Additional Tests: Visual)

Received : 07 Mar 2024
Tested : 07 Mar 2024
Diagnosed : 07 Mar 2024 - Kevin Marson

POWER STATION INC.
 1050 JAYSON COURT
 MISSISSAUGA, ON
 CA L4W 2V5
 Contact: Ryan Udall
 rudall@pwrstn.com
 T: (905)565-1621
 F: (905)629-1499

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.