



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL216
Machine Id
4444
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113894	GFL0087419	GFL0062821
Sample Date		Client Info		28 Mar 2024	07 Jul 2023	19 Oct 2022
Machine Age	kms	Client Info		608393	581907	555969
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	3	19	6
Chromium	ppm	ASTM D5185(m)	>20	0	<1	0
Nickel	ppm	ASTM D5185(m)	>15	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	2	1
Lead	ppm	ASTM D5185(m)	>40	0	2	2
Copper	ppm	ASTM D5185(m)	>330	<1	1	<1
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	1	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Fuel		WC Method	>3.0	<1.0	2.3	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0	0.3	0
Nitration	Abs/cm	ASTM D7624*	>20	6.9	10.7	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.6	22.7	20.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	4
Boron	ppm	ASTM D5185(m)	0	6	4	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	57	58	58
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	952	940	939
Calcium	ppm	ASTM D5185(m)	1070	1019	1030	1053
Phosphorus	ppm	ASTM D5185(m)	1150	973	1057	1058
Zinc	ppm	ASTM D5185(m)	1270	1154	1186	1159
Sulfur	ppm	ASTM D5185(m)	2060	2549	2286	2548
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.2	18.7	17.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	12.9	13.3

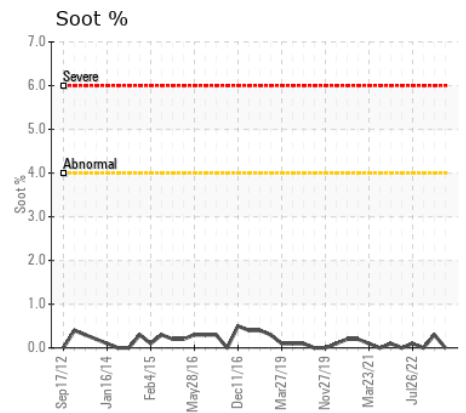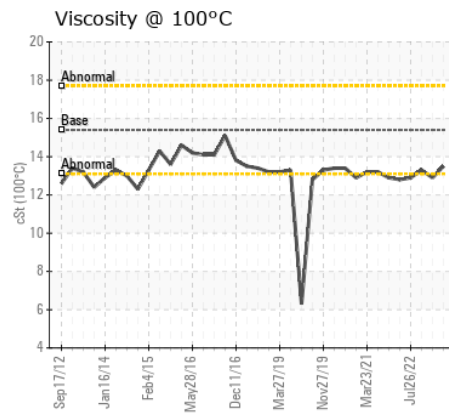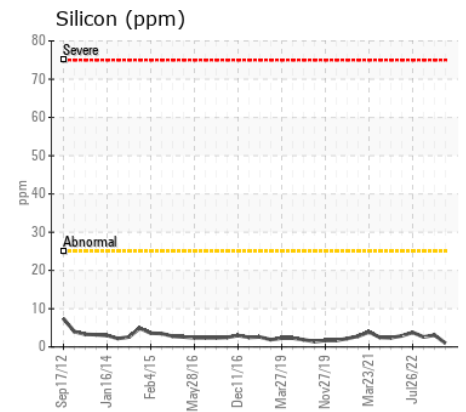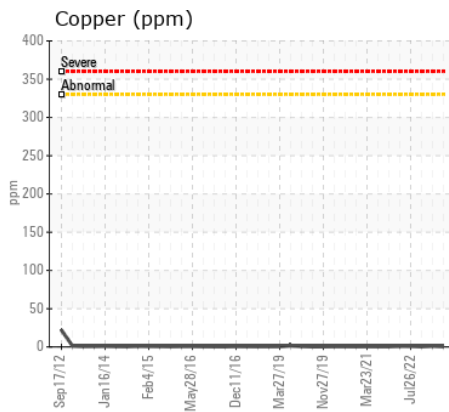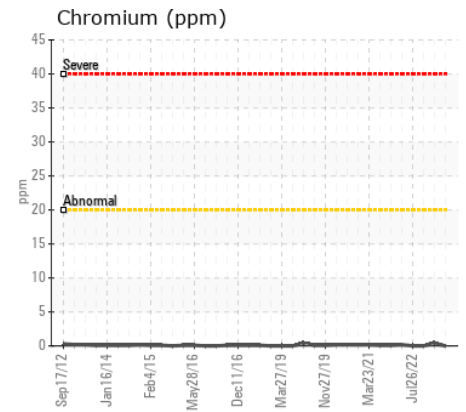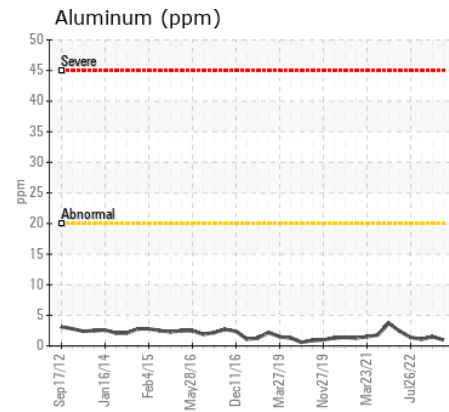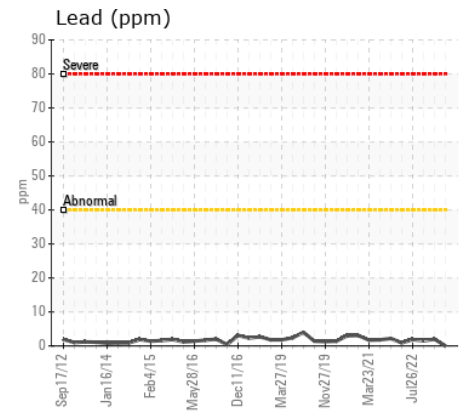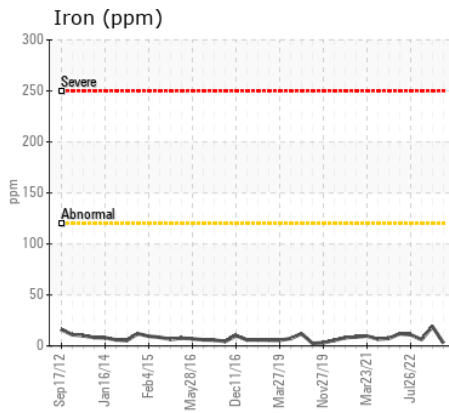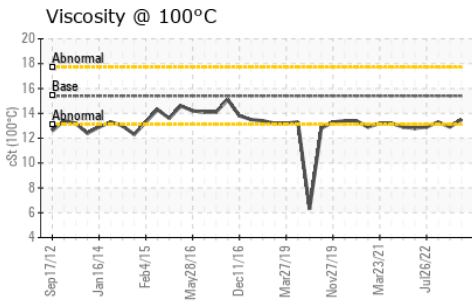

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113894
Lab Number : 02625960
Unique Number : 5759092
Test Package : MOB 1
Received : 02 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 02 Apr 2024 - Wes Davis

GFL Environmental - 252 - GTA Hauling
 3668 Weston Road
 North York, ON
 CA M9L 1W2
 Contact: Amanda Cipollone
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: