



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**185**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**ESSO XD-3 EXTRA 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0889060</b>	WC0889123	WC0889175
Sample Date		Client Info		<b>04 Apr 2024</b>	26 Feb 2024	22 Dec 2023
Machine Age	kms	Client Info		<b>0</b>	0	0
Oil Age	kms	Client Info		<b>9255</b>	9660	9226
Filter Age	kms	Client Info		<b>9255</b>	9660	9226
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	MARGINAL	ABNORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	<b>10</b>	12	13
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	6	7
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	6	14
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	▲ 2.8	▲ 5
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	0.0
Soot %	%	ASTM D7844*	>6	<b>0.5</b>	0.6	0.6
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	10.5	11.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.1</b>	25.8	26.4
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	<b>2</b>	2	2
Boron	ppm	ASTM D5185(m)		<b>77</b>	67	69
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	2	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>16</b>	24	13
Calcium	ppm	ASTM D5185(m)	3780	<b>2248</b>	2242	2098
Phosphorus	ppm	ASTM D5185(m)	1370	<b>954</b>	948	859
Zinc	ppm	ASTM D5185(m)	1500	<b>1192</b>	1133	1036
Sulfur	ppm	ASTM D5185(m)	3800	<b>2785</b>	2936	2852
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.4</b>	22.4	24.5
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.2</b>	14.1	13.7

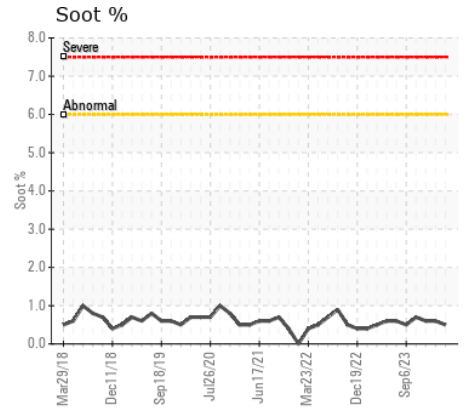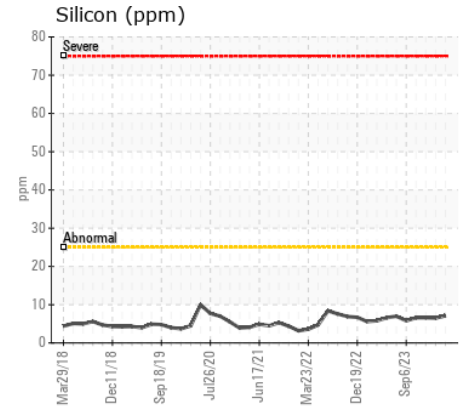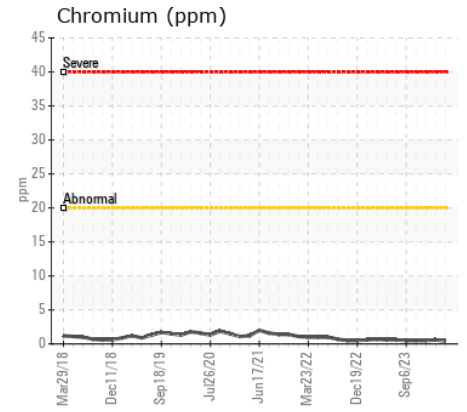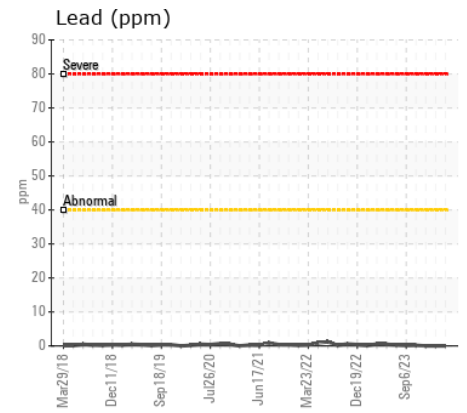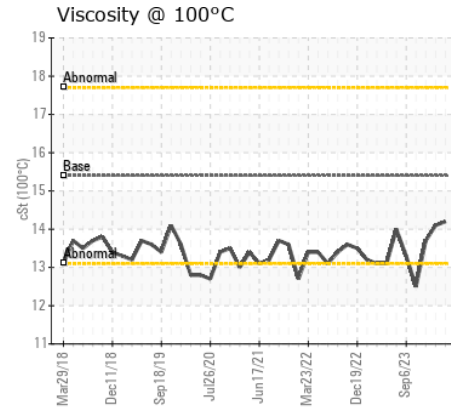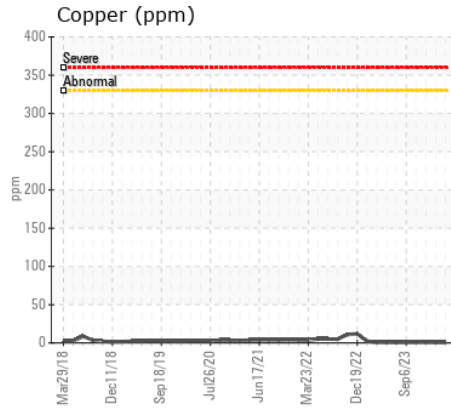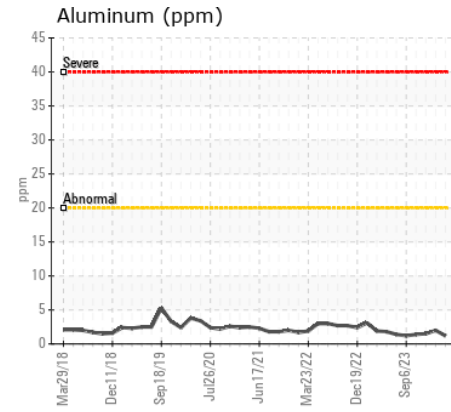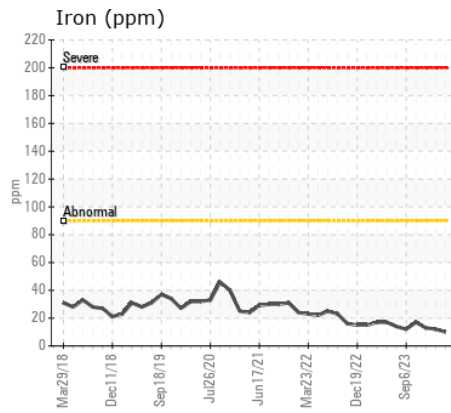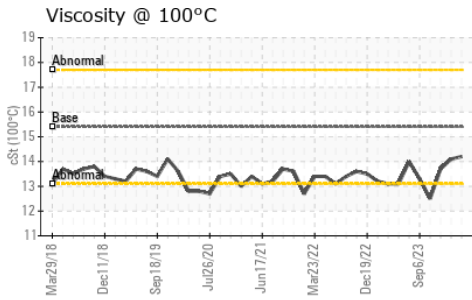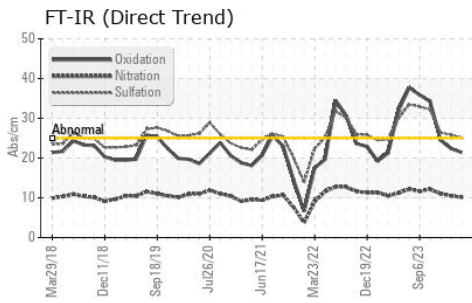

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0889060  
**Lab Number** : 02627293  
**Unique Number** : 5760425  
**Test Package** : MOB 1

**Received** : 08 Apr 2024  
**Tested** : 08 Apr 2024  
**Diagnosed** : 08 Apr 2024 - Wes Davis

**CITY OF THUNDER BAY**  
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD  
 THUNDER BAY, ON  
 CA P7B 2Z8  
 Contact: Sean Malcolm  
 sean.malcolm@thunderbay.ca  
 T: (807)684-2716  
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.