



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1366**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0925699</b>	WC0895815	WC0873873
Sample Date		Client Info		<b>03 Apr 2024</b>	24 Jan 2024	07 Nov 2023
Machine Age	hrs	Client Info		<b>33665</b>	33126	32558
Oil Age	hrs	Client Info		<b>539</b>	538	554
Filter Age	hrs	Client Info		<b>539</b>	538	554
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>16</b>	16	19
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	1	2
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	6	5
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 3.9
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.7</b>	0.7	0.7
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	11.0	10.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.0</b>	27.1	30.5
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	2	4
Boron	ppm	ASTM D5185(m)	250	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	<b>59</b>	56	55
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	450	<b>955</b>	876	878
Calcium	ppm	ASTM D5185(m)	3000	<b>1050</b>	1009	984
Phosphorus	ppm	ASTM D5185(m)	1150	<b>977</b>	885	871
Zinc	ppm	ASTM D5185(m)	1350	<b>1172</b>	1100	1072
Sulfur	ppm	ASTM D5185(m)	4250	<b>2433</b>	2548	2286
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.1</b>	29.5	37.1
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.3</b>	12.7	▲ 11.8

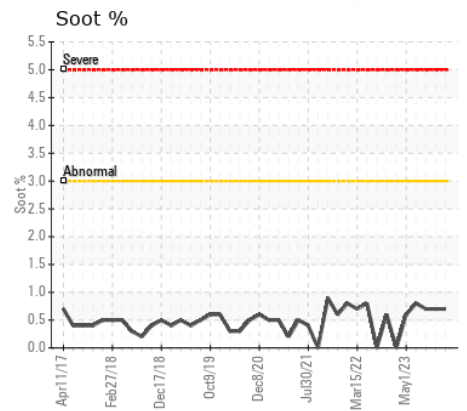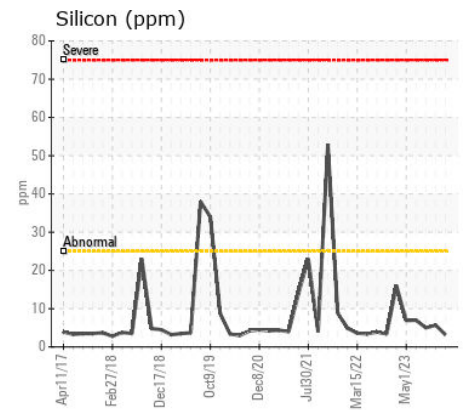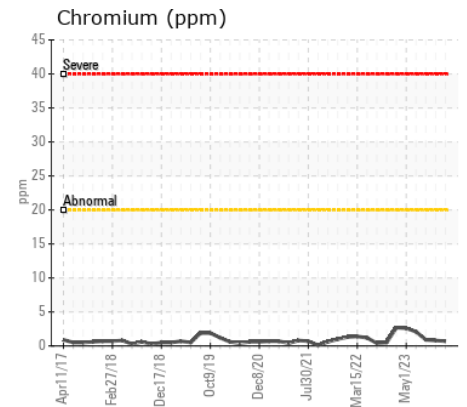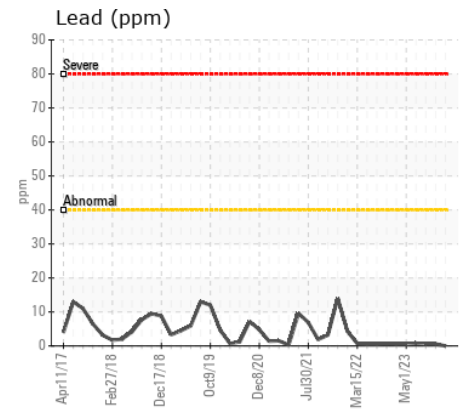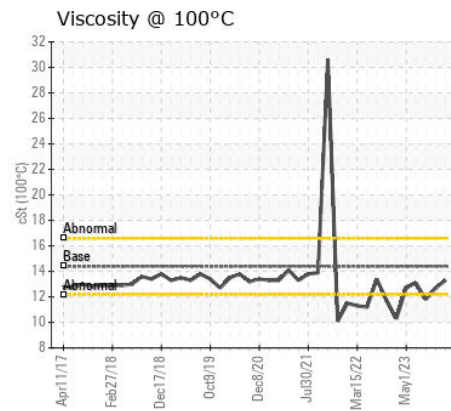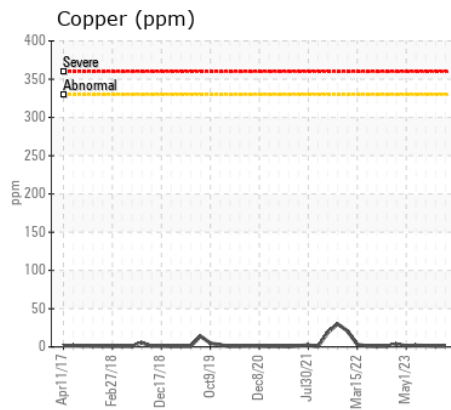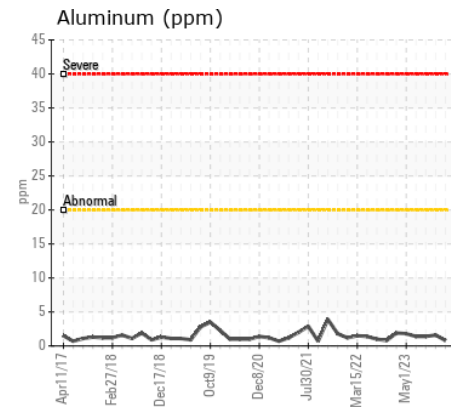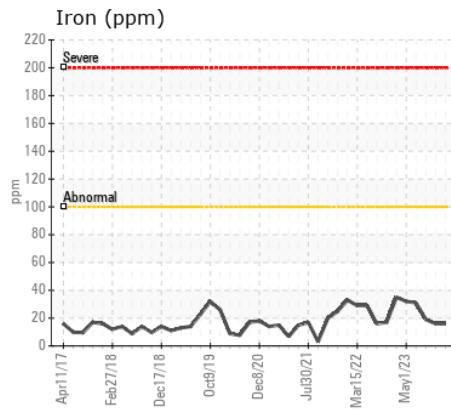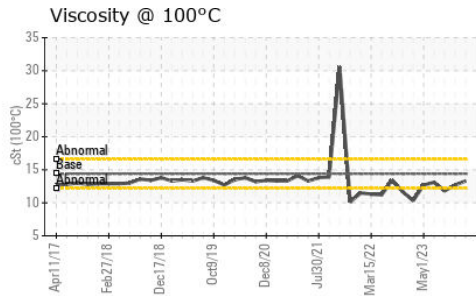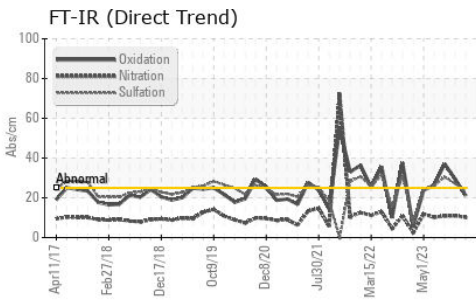

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0925699  
**Lab Number** : 02628130  
**Unique Number** : 5761262  
**Test Package** : MOB 1  
**Received** : 11 Apr 2024  
**Tested** : 11 Apr 2024  
**Diagnosed** : 11 Apr 2024 - Wes Davis

**KINGSTON TRANSIT**  
 1181 JOHN COUNTER BLVD  
 KINGSTON, ON  
 CA K7K 6C7  
 Contact: Brent Gunter  
 bgunter@cityofkingston.ca  
 T: (613)546-4291  
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.