



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR A934 061746-1418
Component
Rear Differential
Fluid
SAE 75W90 (19 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0251444	LHMC120613
Sample Date		Client Info		11 Apr 2024	09 Jan 2023	05 Dec 2017
Machine Age	hrs	Client Info		13245	13240	10469
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>190	53	51	41
Chromium	ppm	ASTM D5185(m)	>2	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>15	0	<1	0
Copper	ppm	ASTM D5185(m)	>70	13	14	29
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	2	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	4	4
Boron	ppm	ASTM D5185(m)	150	27	25	92
Barium	ppm	ASTM D5185(m)	5	<1	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		1	1	1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	20	45	44	72
Phosphorus	ppm	ASTM D5185(m)	1200	2126	2222	1093
Zinc	ppm	ASTM D5185(m)	25	44	44	32
Sulfur	ppm	ASTM D5185(m)	22000	23701	23984	17025
Visc @ 40°C	cSt	ASTM D7279(m)	99.5	181	182	136.0

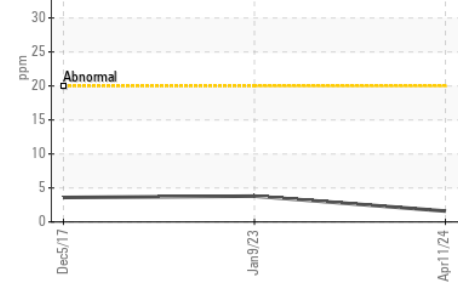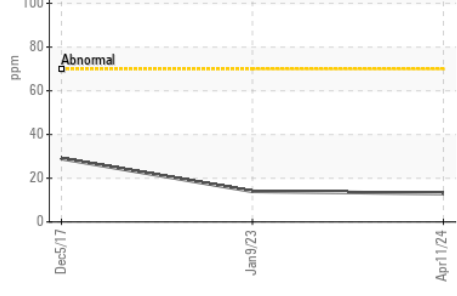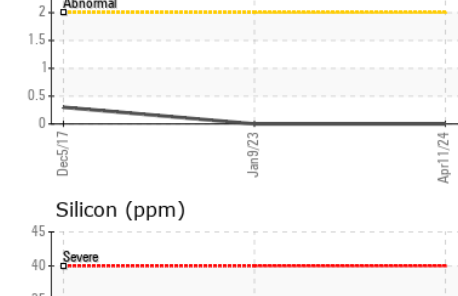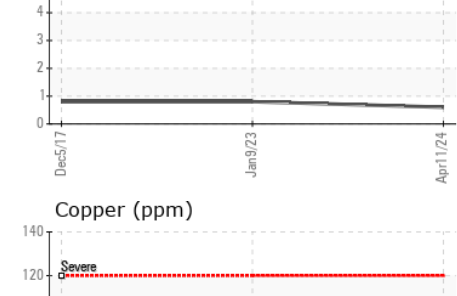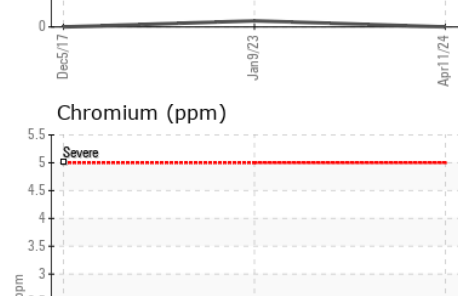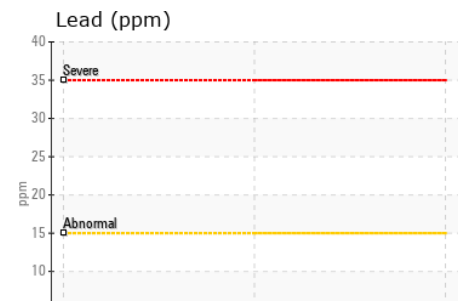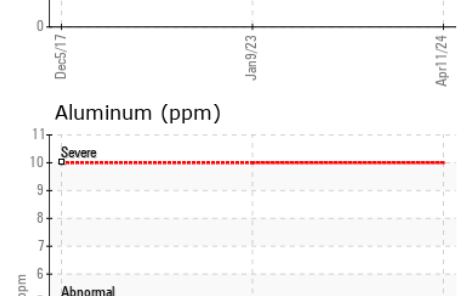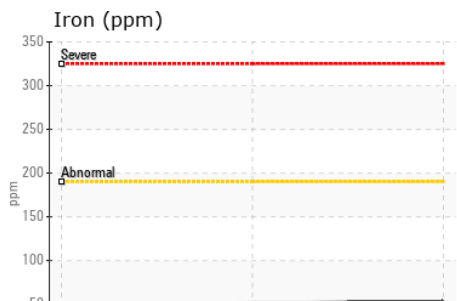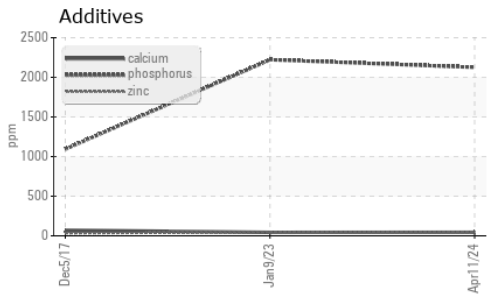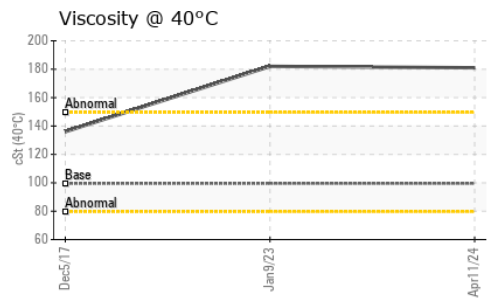

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Received** : 12 Apr 2024
Lab Number : 02628531 **Tested** : 12 Apr 2024
Unique Number : 5761663 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : MOB 1

MAKSTEEL SERVICE CENTRE
 7615 TORBRAM ROAD
 MISSISSAUGA, ON
 CA L4T 4A8
 Contact: Steve Dodge
 stevedodge@maksteel.com
 T: (905)671-3000
 F: (905)673-4937

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.