

Machine Id  
**EX0363**  
Component  
**Hydraulic System**  
Fluid  
**SAE 10W (--- GAL)**

### RECOMMENDATION

Nous recommandons le remplacement des filtres de ce composant. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118329</b>	GFL0067507	---
Sample Date		Client Info		<b>11 Apr 2024</b>	12 Feb 2024	---
Machine Age	hrs	Client Info		<b>16875</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	SEVERE	---

### WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>20	<b>5</b>	26	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	4	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>75	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION









Il y a une quantité modérée de particules (de 4 à 14 microns) dans l'huile.

Silicon	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	10	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 11791</b>	▲ 319096	---
Particles >6µm		ASTM D7647	>1300	<b>491</b>	▲ 257259	---
Particles >14µm		ASTM D7647	>160	<b>12</b>	▲ 67570	---
Particles >21µm		ASTM D7647	>40	<b>3</b>	▲ 15181	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	▲ 219	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	4	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 21/16/11</b>	▲ 25/25/23	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	▲ LIGHT	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

l'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)		<b>17</b>	23	---
Calcium	ppm	ASTM D5185(m)		<b>213</b>	294	---
Phosphorus	ppm	ASTM D5185(m)		<b>364</b>	392	---
Zinc	ppm	ASTM D5185(m)		<b>468</b>	507	---
Sulfur	ppm	ASTM D5185(m)		<b>875</b>	1060	---
Visc @ 40°C	cSt	ASTM D7279(m)	35.0	<b>41.7</b>	41.5	---

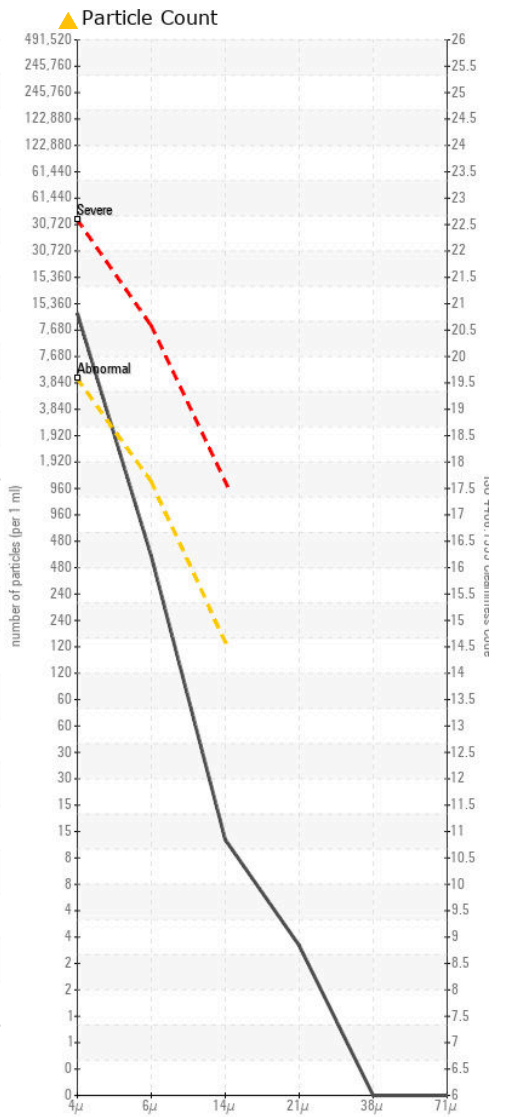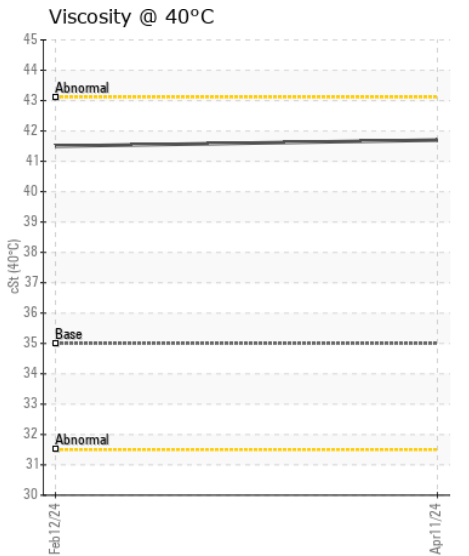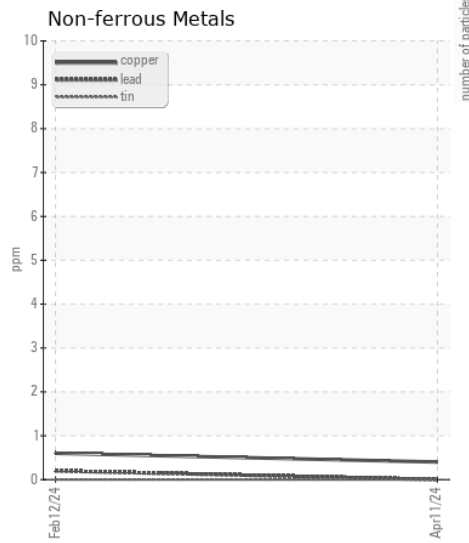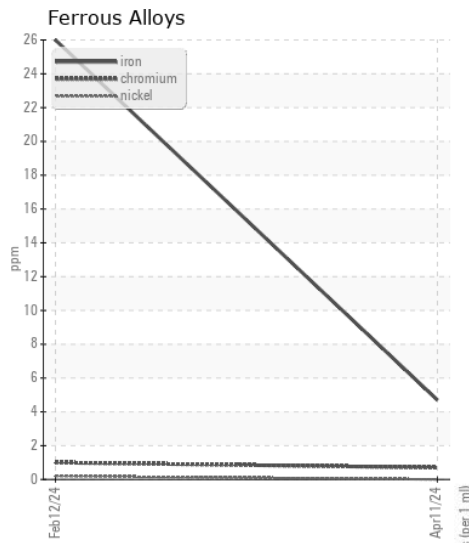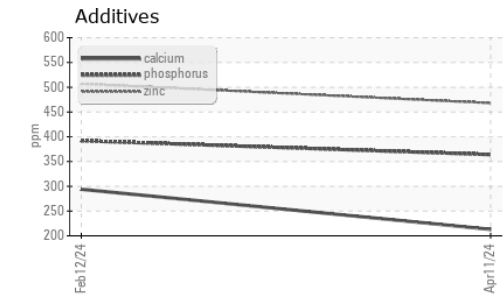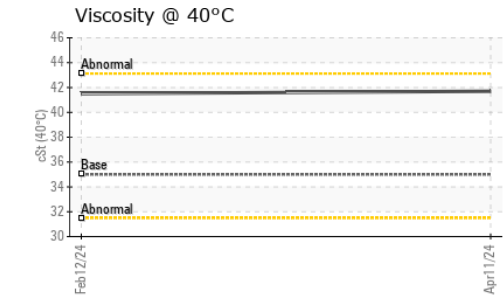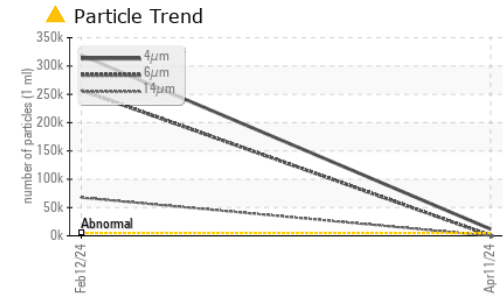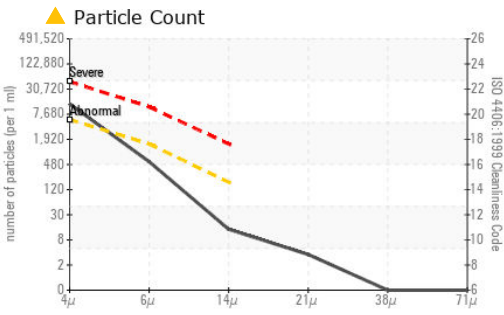

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0118329  
**Lab Number** : 02628883  
**Unique Number** : 5762015  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )

**GFL Environmental - 743 - Montreal Est CD Processing**  
 10930 rue Sherbrooke  
 Montreal, QC  
 CA H1B 1B4  
 Contact: Patrick Beaulieu  
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.