



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(C-GATD)

Machine Id

[C-GATD] CESSNA 185F 1037472

Component

Center Piston Aircraft Engine

Fluid

PHILLIPS 66 AVIATION X/C OIL SAE20W50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0882183	WC0882195	WC0841054
Sample Date		Client Info		17 Apr 2024	02 Jan 2024	05 Sep 2023
TSN	hrs	Client Info		0	550	552
TSO	hrs	Client Info		575	0	0
Oil Age	hrs	Client Info		29	23	50
Filter Age	hrs	Client Info		29	23	50
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	35	40	61
Chromium	ppm	ASTM D5185(m)	>20	7	7	12
Nickel	ppm	ASTM D5185(m)	>15	6	4	5
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	5	6	10
Lead	ppm	ASTM D5185(m)	>20000	3983	3882	5204
Copper	ppm	ASTM D5185(m)	>25	2	2	3
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	2	4	4
Potassium	ppm	ASTM D5185(m)	>20	0	0	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	0	<1
Boron	ppm	ASTM D5185(m)		<1	0	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		2	3	6
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	0	<1
Calcium	ppm	ASTM D5185(m)		<1	<1	<1
Phosphorus	ppm	ASTM D5185(m)		0	<1	2
Zinc	ppm	ASTM D5185(m)		2	2	3
Sulfur	ppm	ASTM D5185(m)		928	1029	1059
Visc @ 100°C	cSt	ASTM D7279(m)	19.8	19.3	19.6	21.2

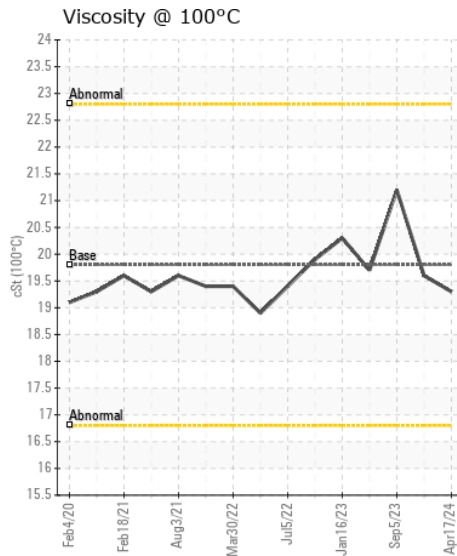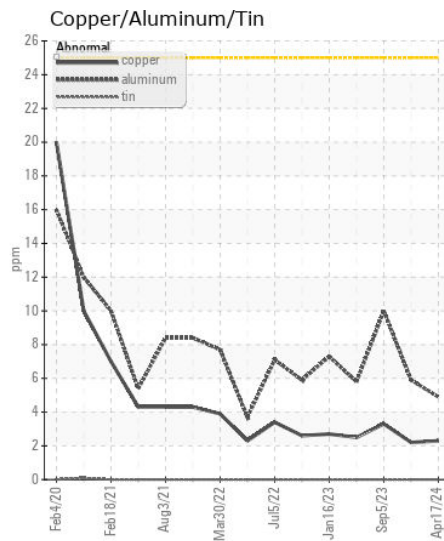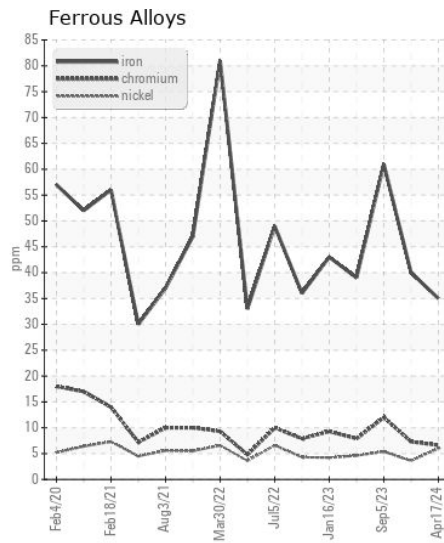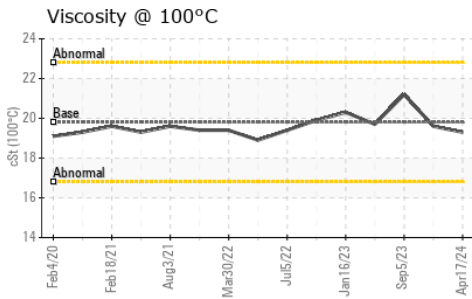

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0882183
Lab Number : 02629920
Unique Number : 5763052
Test Package : AVI 1
Received : 18 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Kevin Marson

CORPORATE AIRCRAFT RESTORATIONS
 481 AVIATOR LANE
 OSHAWA, ON
 CA L1J 0B8
 Contact: Maurice Nesbitt
 hangar@bellnet.ca
 T: (905)434-5173
 F: (905)983-9599

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.