



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
212006
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088187	PC0050320	---
Sample Date		Client Info		18 Apr 2024	29 Jun 2022	---
Machine Age	kms	Client Info		137820	35733	---
Oil Age	kms	Client Info		0	0	---
Filter Age	kms	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>160	24	45	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	0	---
Aluminum	ppm	ASTM D5185(m)	>50	6	10	---
Lead	ppm	ASTM D5185(m)	>50	<1	2	---
Copper	ppm	ASTM D5185(m)	>225	3	5	---
Tin	ppm	ASTM D5185(m)	>10	<1	1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	3	5	---
Potassium	ppm	ASTM D5185(m)	>20	4	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		3	5	---
Boron	ppm	ASTM D5185(m)		71	93	---
Barium	ppm	ASTM D5185(m)		0	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		<1	2	---
Magnesium	ppm	ASTM D5185(m)		1	1	---
Calcium	ppm	ASTM D5185(m)		113	62	---
Phosphorus	ppm	ASTM D5185(m)		214	256	---
Zinc	ppm	ASTM D5185(m)		4	9	---
Sulfur	ppm	ASTM D5185(m)		1313	1046	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	32.1	34.4	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.3	6.8	---
Viscosity Index (VI)	Scale	ASTM D2270*	155	150	160	---

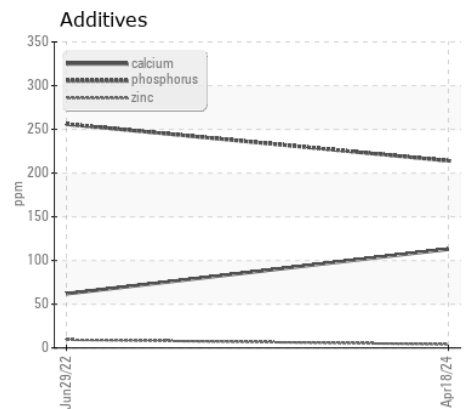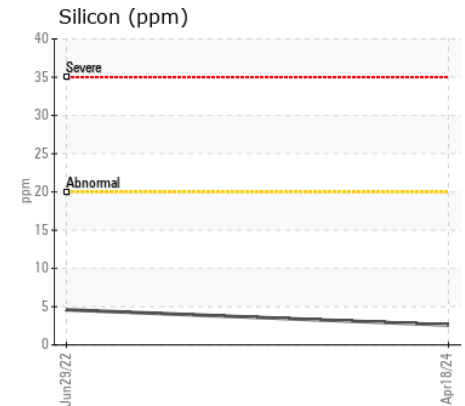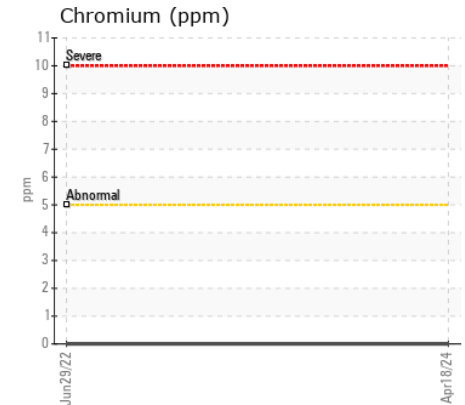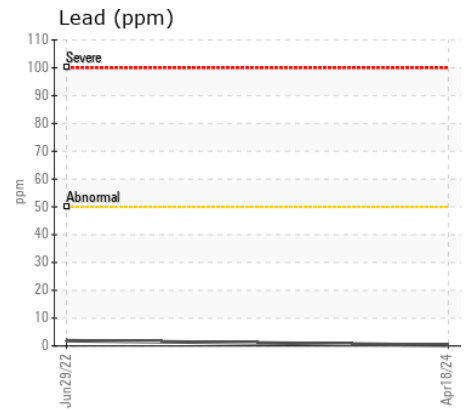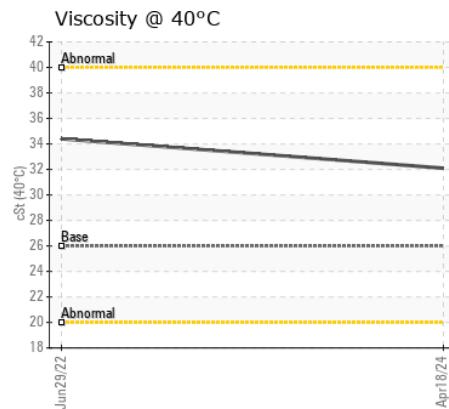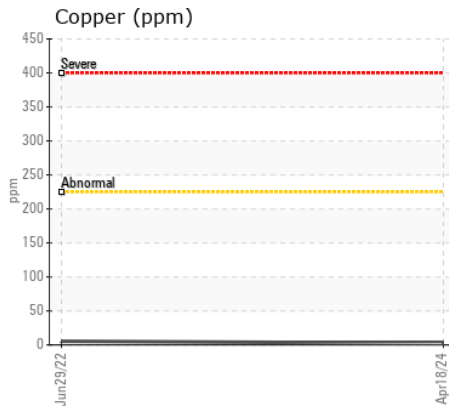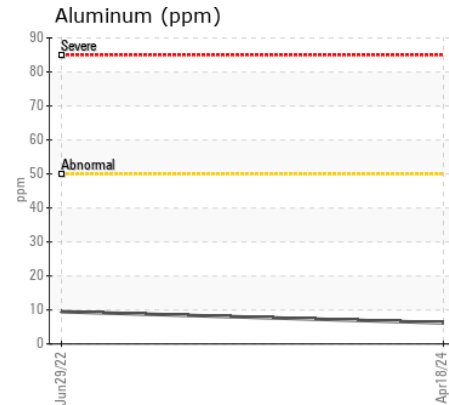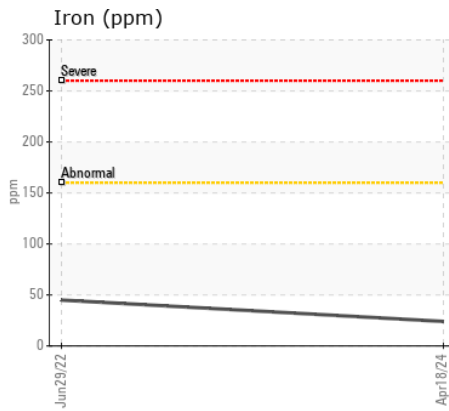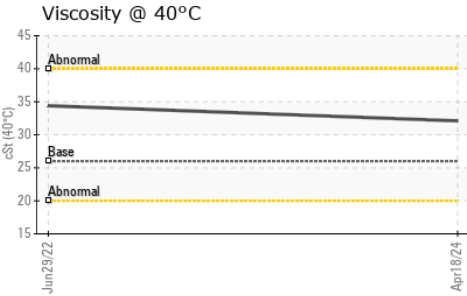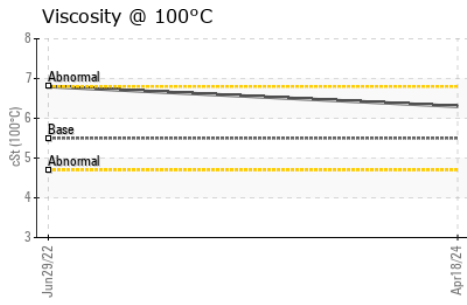

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088187
Lab Number : 02630640
Unique Number : 5763772
Test Package : MOB 1 (Additional Tests: KV100, VI)

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: