



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
183
 Component
Rear Transmission (Auto)
 Fluid
CASTROL TRANSYND (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0888995	WC0889185	WC0866424
Sample Date		Client Info		11 Apr 2024	17 Jan 2024	16 Nov 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		18505	9090	47388
Filter Age	kms	Client Info		18505	9090	47388
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	SEVERE

WEAR

All component wear rates are normal.

PQ		ASTM D8184*	>50	0	---	---
Iron	ppm	ASTM D5185(m)	>160	31	18	64
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>50	5	3	14
Lead	ppm	ASTM D5185(m)	>50	3	2	2
Copper	ppm	ASTM D5185(m)	>225	10	6	12
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	4	4	11
Potassium	ppm	ASTM D5185(m)	>20	1	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185(m)		5	5	5
Boron	ppm	ASTM D5185(m)	150	61	63	77
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	2	<1	0
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)	0	5	8	<1
Calcium	ppm	ASTM D5185(m)	40	137	142	124
Phosphorus	ppm	ASTM D5185(m)	320	210	216	264
Zinc	ppm	ASTM D5185(m)	5	13	15	6
Sulfur	ppm	ASTM D5185(m)	1050	1381	1544	1511
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	0.94	1.15	1.74
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	33.2	33.4	32.3
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	6.7	6.8	6.5
Viscosity Index (VI)	Scale	ASTM D2270*	168	164	167	160

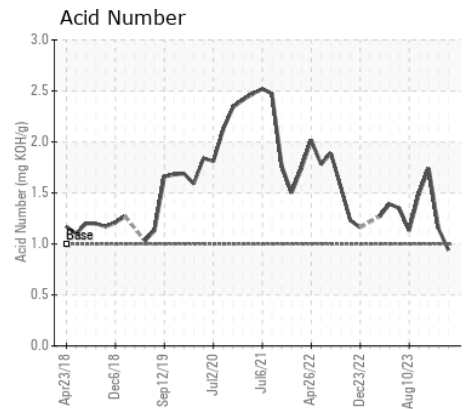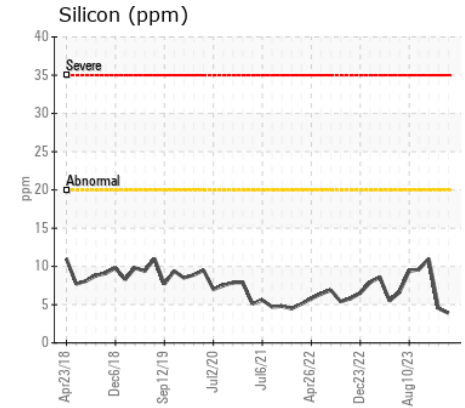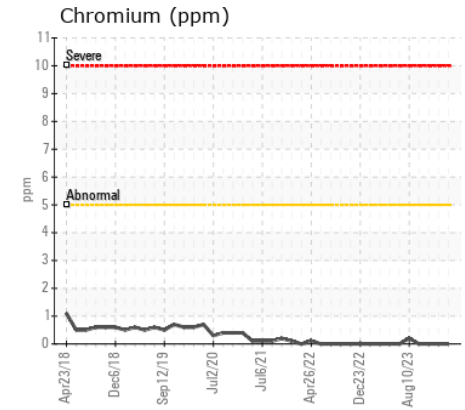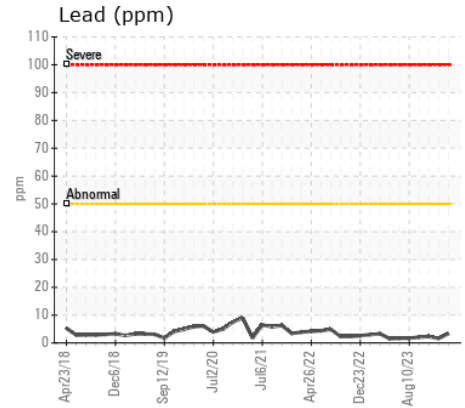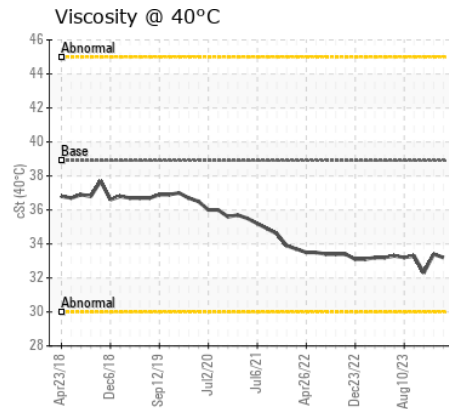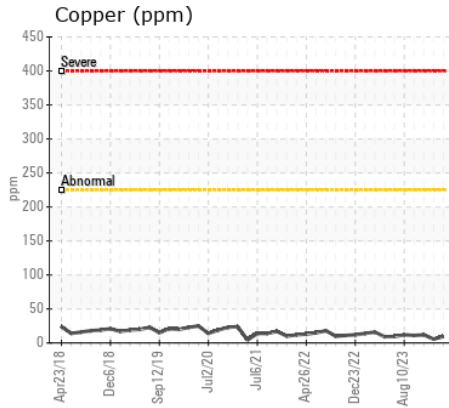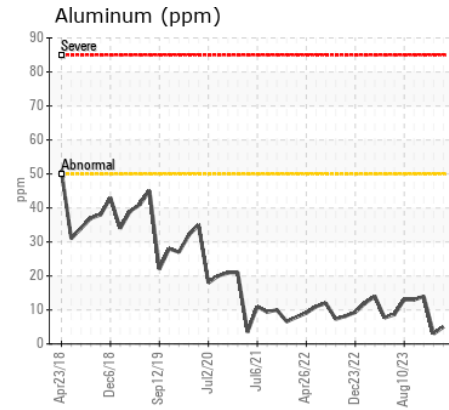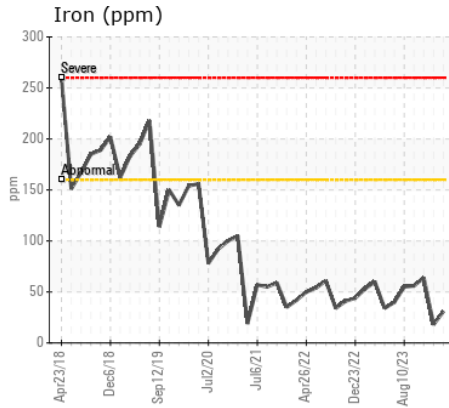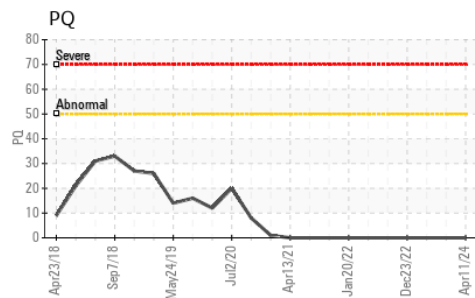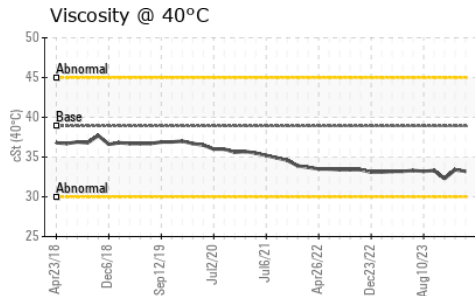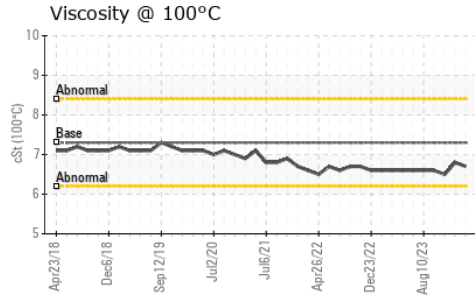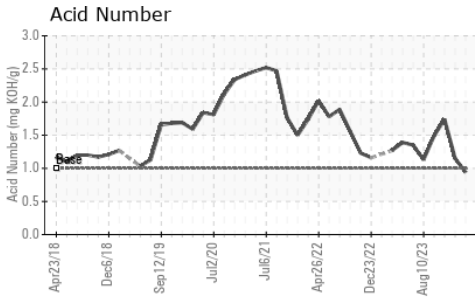

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0888995
Lab Number : 02630650
Unique Number : 5763782
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237