



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
4900 series
 Machine Id
Navistar 4951
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0904862	WC0879116	WC0785900
Sample Date		Client Info		25 Apr 2024	26 Nov 2023	29 May 2023
Machine Age	mls	Client Info		131593	0	123653
Oil Age	mls	Client Info		10000	0	7188
Filter Age	mls	Client Info		10000	0	7188
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	47	13	14
Chromium	ppm	ASTM D5185(m)	>20	1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	---	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	5	6
Potassium	ppm	ASTM D5185(m)	>20	1	<1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	7.1	7.4	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.6	19.5	19.4
Silt	scalar	Visual*	NONE	NONE	---	NONE
Debris	scalar	Visual*	NONE	NONE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	---	NONE
Appearance	scalar	Visual*	NORML	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	2	1	1	9
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	61	61	62
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	1003	984	950
Calcium	ppm	ASTM D5185(m)	1050	1078	1062	1107
Phosphorus	ppm	ASTM D5185(m)	995	1051	1003	1094
Zinc	ppm	ASTM D5185(m)	1180	1215	1198	1148
Sulfur	ppm	ASTM D5185(m)	2600	2637	2583	2688
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.8	15.2	15.3
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	14.2	14.0

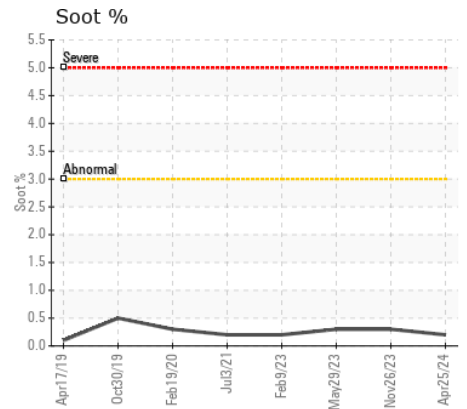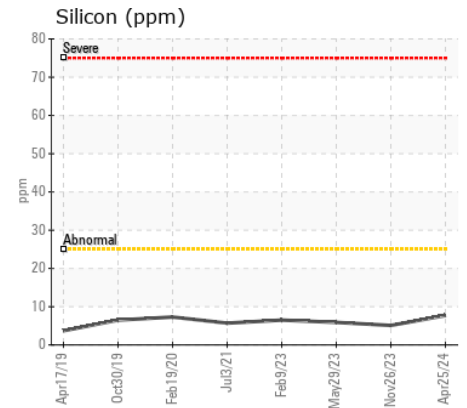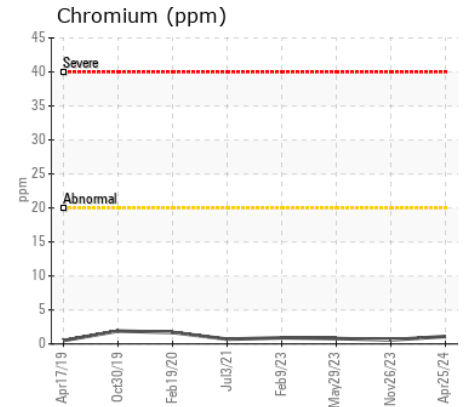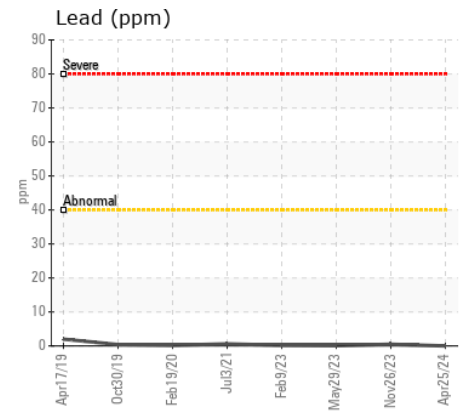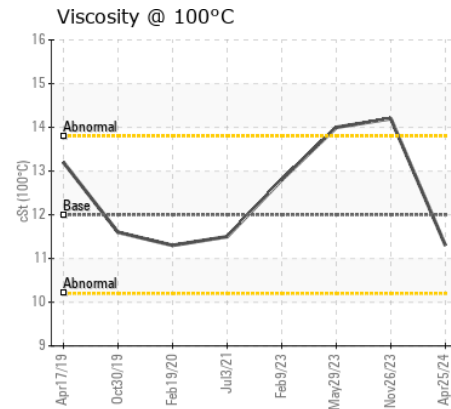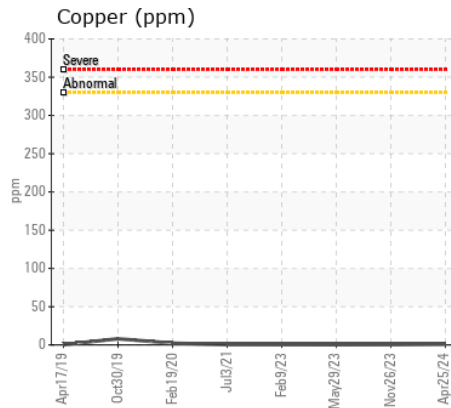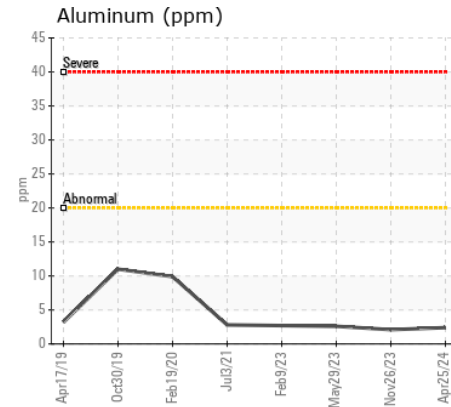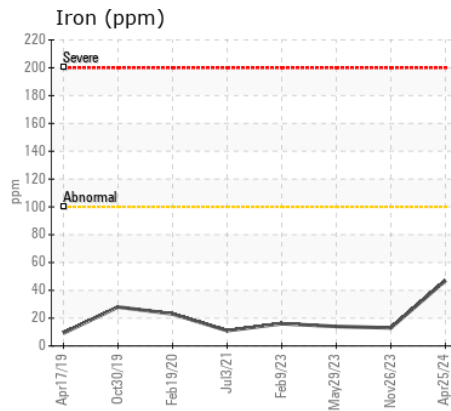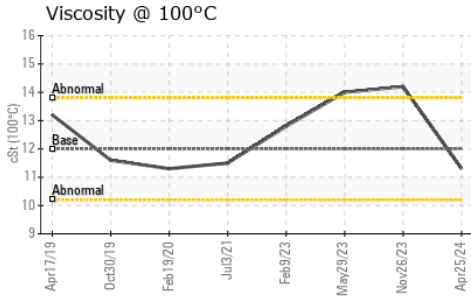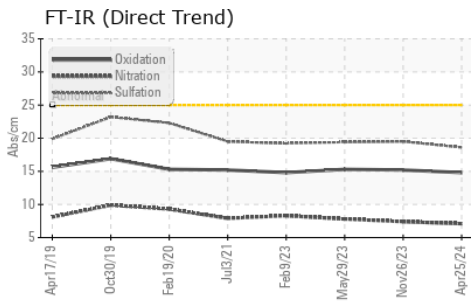

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0904862 **Received** : 30 Apr 2024
Lab Number : 02632294 **Tested** : 30 Apr 2024
Unique Number : 5773447 **Diagnosed** : 30 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

MANITOU LIN TRANSPORT
 75 MUMFORD ROAD
 LIVELY, ON
 CA P3Y 1L1
 Contact: Devin Mayer
 dmayer@manitoulintransport.com
 T: (705)282-4102
 F: (705)692-9303

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.