

Area
[1269414]
Machine Id
214000
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

We advise that you check the fuel injection system. We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110685	GFL0110668	GFL0110656
Sample Date		Client Info		01 May 2024	21 Mar 2024	21 Feb 2024
Machine Age	hrs	Client Info		16362	16132	15953
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				SEVERE	SEVERE	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	15	11	9
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	1	1	1
Lead	ppm	ASTM D5185(m)	>25	0	0	0
Copper	ppm	ASTM D5185(m)	>100	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













Test for glycol is positive. There is a high amount of fuel present in the oil. There is a light concentration of glycol present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	1	3
Potassium	ppm	ASTM D5185(m)	>20	4	3	2
Fuel	%	ASTM D7593*	>3.0	▲ 13.4	▲ 23	▲ 23.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		▲ 0.011	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.2	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	13.8	13.2	11.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.4	23.1	20.8
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		● 84	46	38
Boron	ppm	ASTM D5185(m)	0	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	60	47	46
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	834	685	688
Calcium	ppm	ASTM D5185(m)	1070	889	734	739
Phosphorus	ppm	ASTM D5185(m)	1150	822	691	726
Zinc	ppm	ASTM D5185(m)	1270	1012	848	829
Sulfur	ppm	ASTM D5185(m)	2060	2000	1731	1922
Oxidation	Abs/.1mm	ASTM D7414*	>25	32.2	29.6	22.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.2	▲ 9.2	▲ 8.9

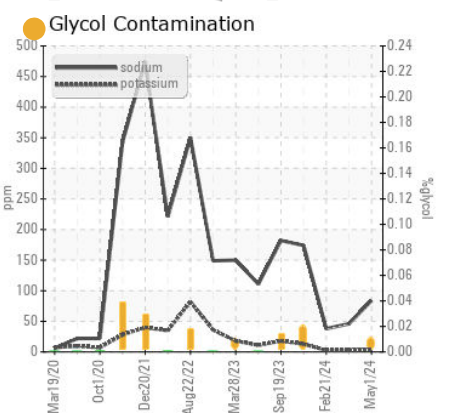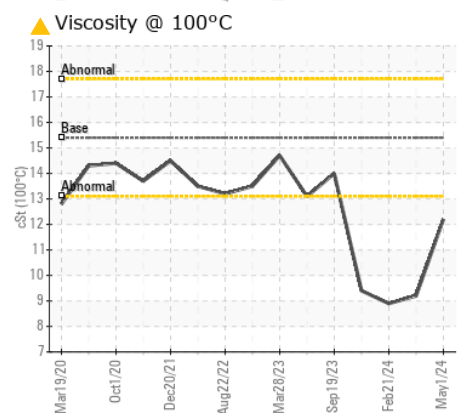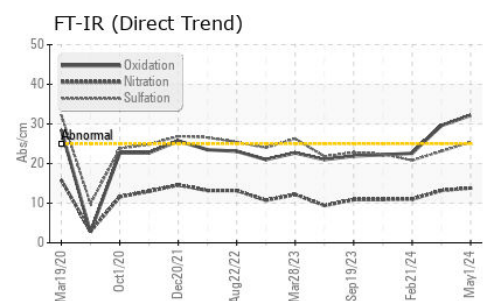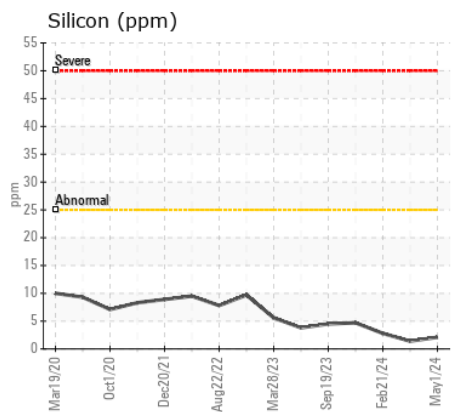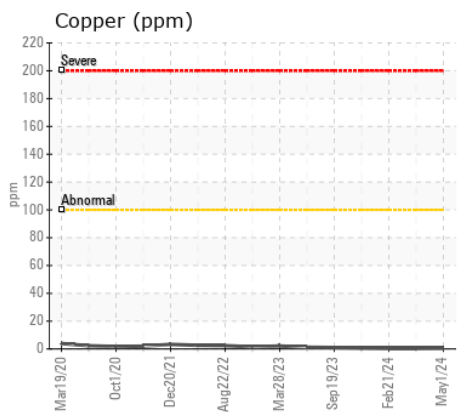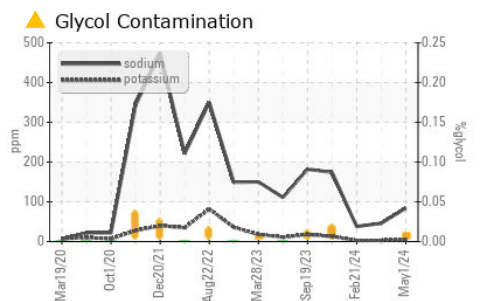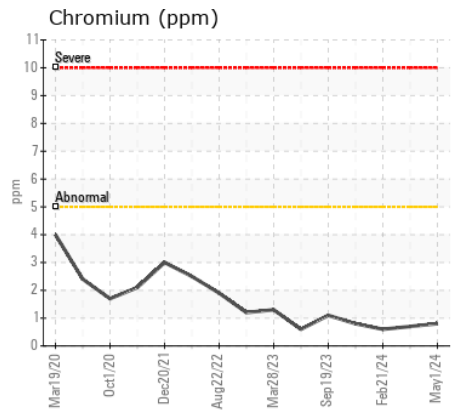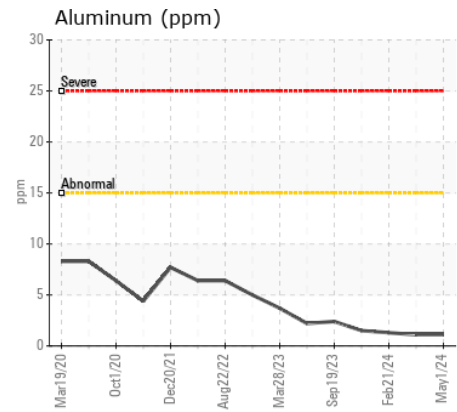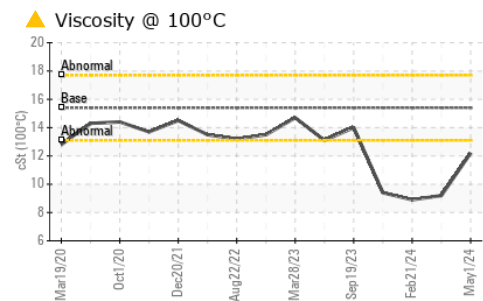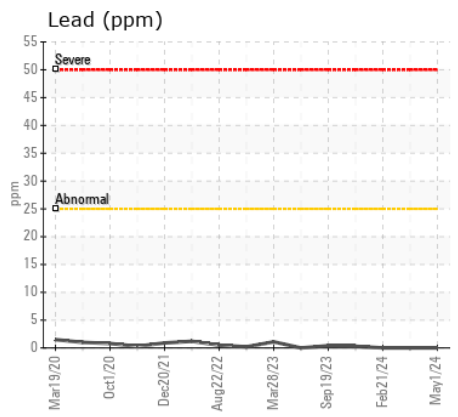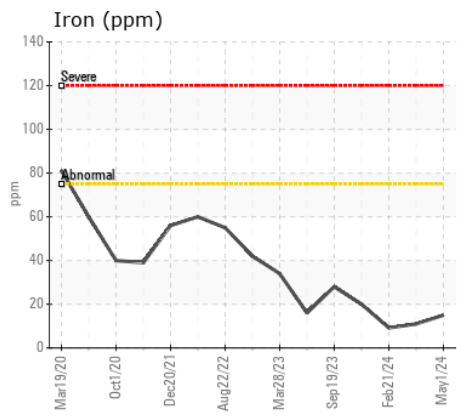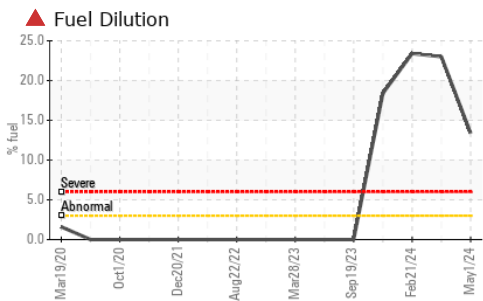

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0110685 **Received** : 03 May 2024
Lab Number : 02632972 **Tested** : 06 May 2024
Unique Number : 5774125 **Diagnosed** : 06 May 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol, PercentFuel, Visual)

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.