



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JULIEN LIZOTTE
Machine Id
CHEVROLET NO UNIT ASF0000356
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASF0000356	---	---
Sample Date		Client Info		02 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>100	35	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>40	2	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	27	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0.8	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)	35	2	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	2	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	10	23	---	---
Calcium	ppm	ASTM D5185(m)	2340	2317	---	---
Phosphorus	ppm	ASTM D5185(m)	1110	886	---	---
Zinc	ppm	ASTM D5185(m)	1210	1025	---	---
Sulfur	ppm	ASTM D5185(m)	3890	2894	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	13.5	---	---

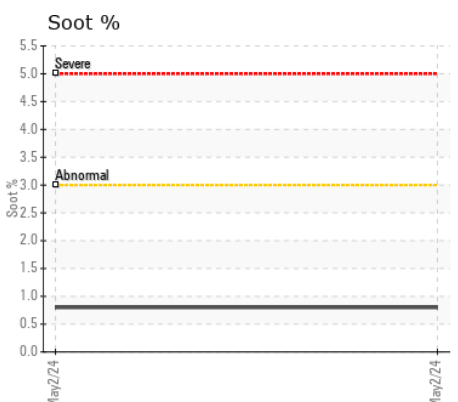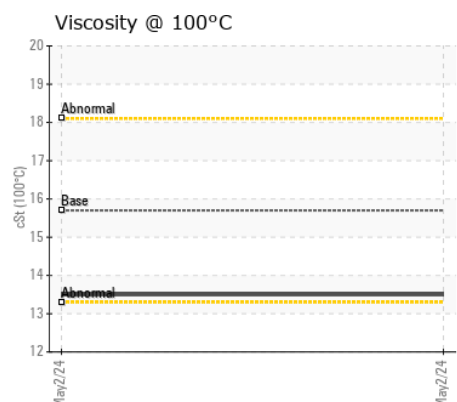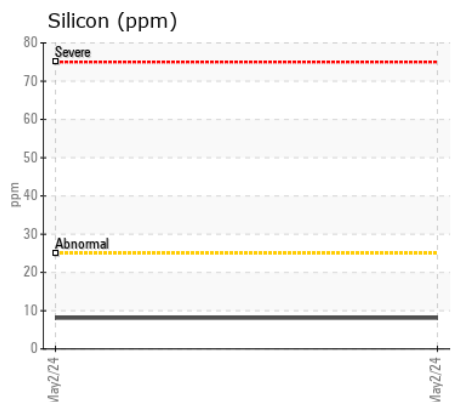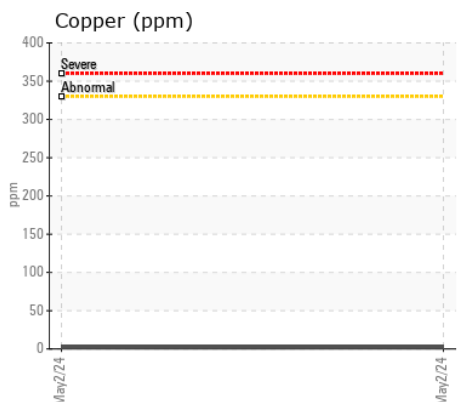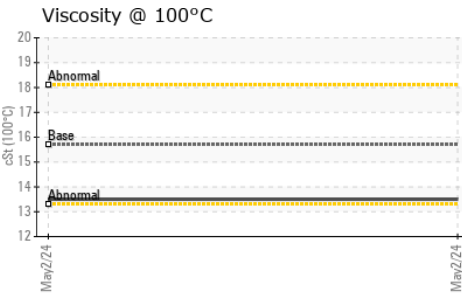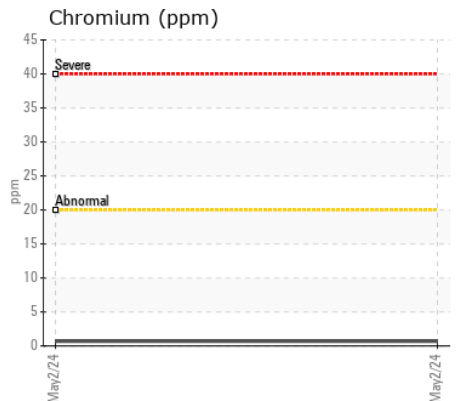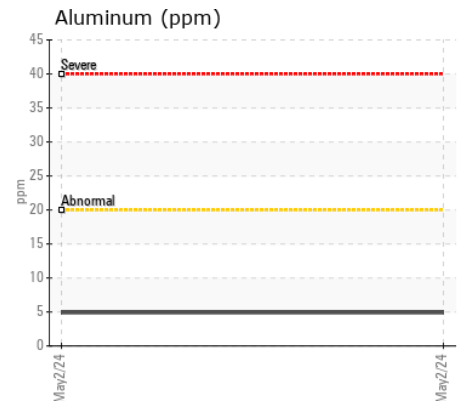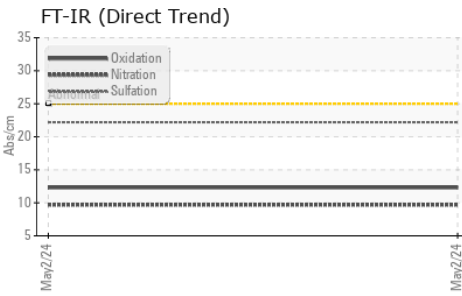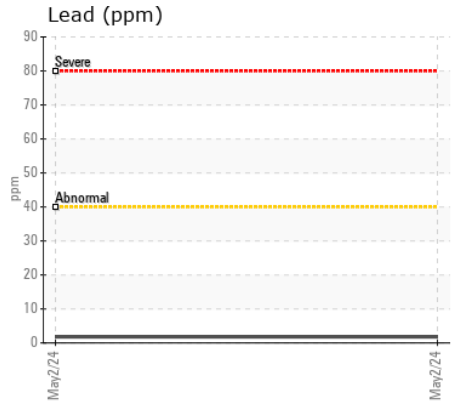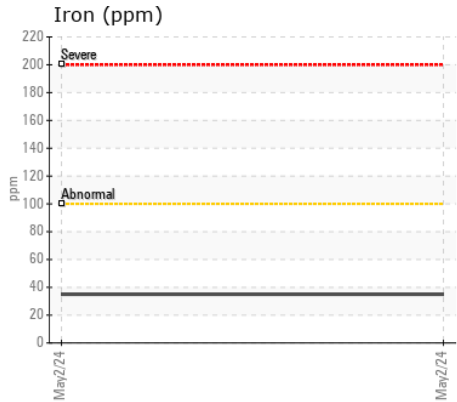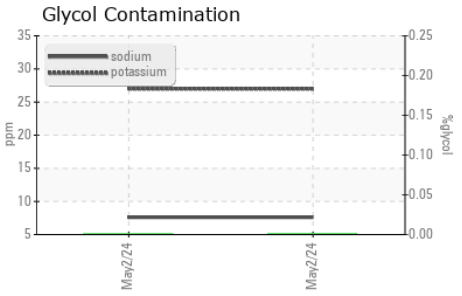

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000356 **Received** : 03 May 2024
Lab Number : 02633041 **Tested** : 03 May 2024
Unique Number : 5774194 **Diagnosed** : 03 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Michel Jalbert
 mjalbert@aprilsuperflo.com
 T:
 F: (418)898-2192

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.