



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1253
 Component
Rear Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0932513	WC0887381	WC0873843
Sample Date		Client Info		30 Apr 2024	05 Jan 2024	22 Nov 2023
Machine Age	hrs	Client Info		19792	33225	18267
Oil Age	hrs	Client Info		500	522	526
Filter Age	hrs	Client Info		500	522	526
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	MARGINAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	20	15	8
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	1	<1
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	6	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0
Fuel		WC Method	>5	<1.0	<1.0	▲ 2.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1.1	0.9	0.4
Nitration	Abs/cm	ASTM D7624*	>20	11.0	11.3	8.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.0	25.6	24.4
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	2	2
Boron	ppm	ASTM D5185(m)	0	1	2	3
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	61	58	58
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	997	939	922
Calcium	ppm	ASTM D5185(m)	1070	1077	1041	1014
Phosphorus	ppm	ASTM D5185(m)	1150	1015	976	945
Zinc	ppm	ASTM D5185(m)	1270	1213	1145	1151
Sulfur	ppm	ASTM D5185(m)	2060	2475	2593	2456
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.6	25.6	25.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.2	13.9	13.0

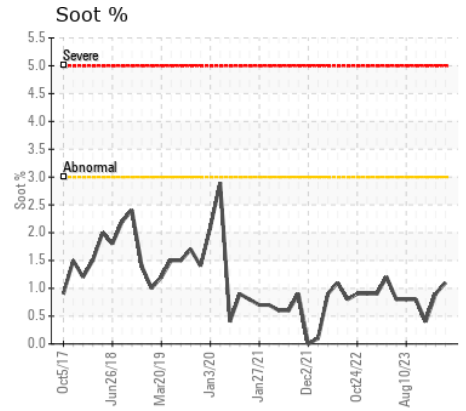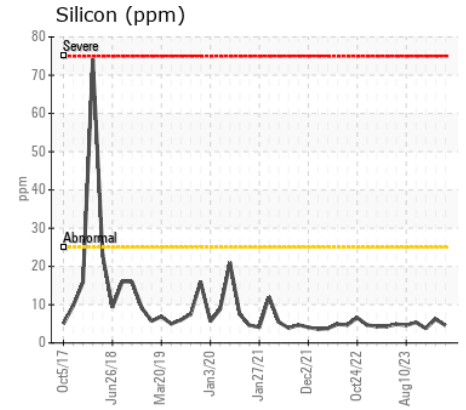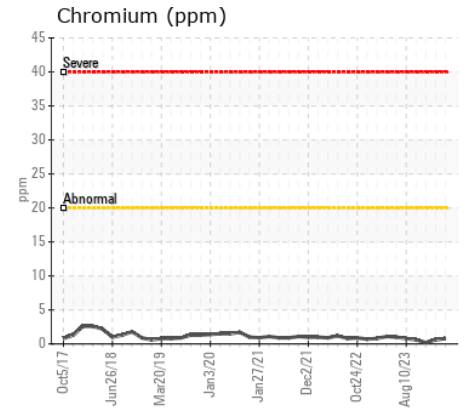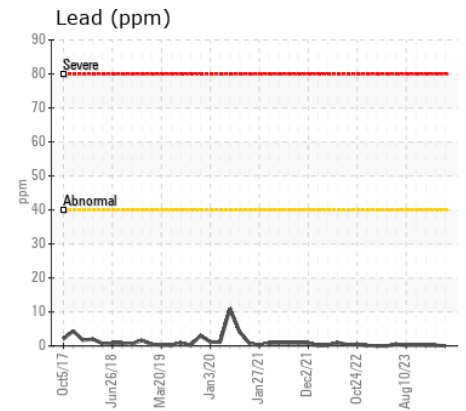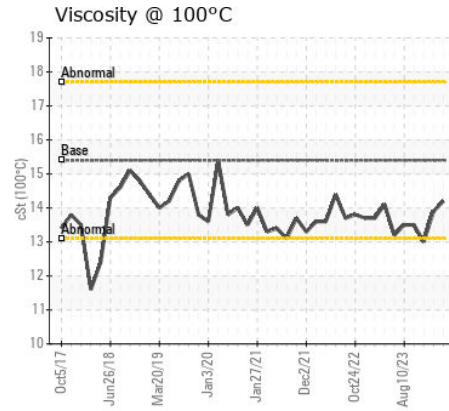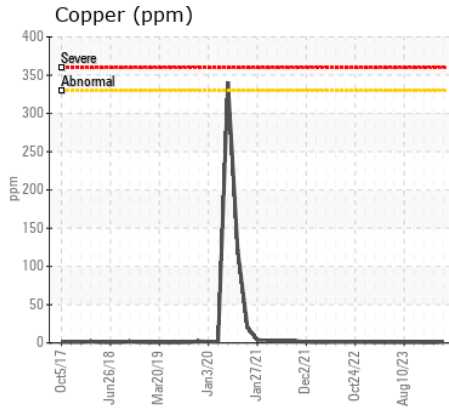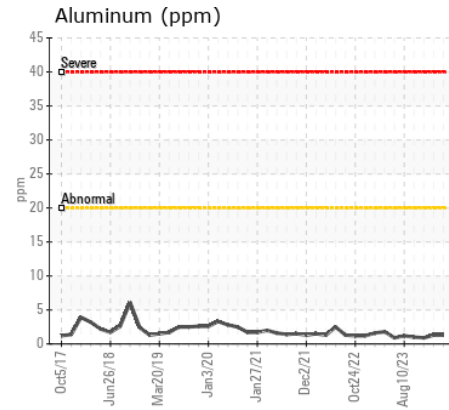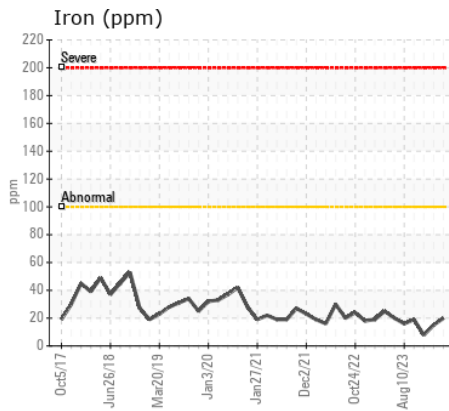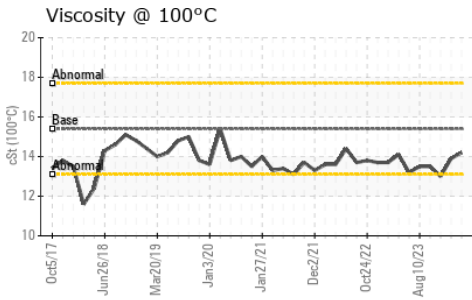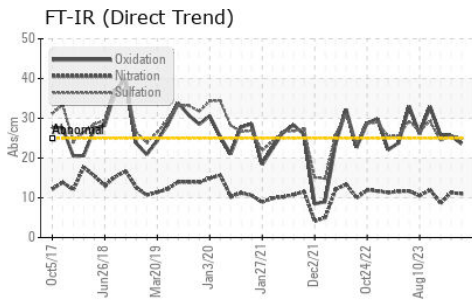

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0932513 **Received** : 03 May 2024
Lab Number : 02633083 **Tested** : 03 May 2024
Unique Number : 5774236 **Diagnosed** : 03 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.