



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1841
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0932515	WC0913060	WC0905434
Sample Date		Client Info		01 May 2024	18 Mar 2024	11 Feb 2024
Machine Age	hrs	Client Info		21601	21113	20709
Oil Age	hrs	Client Info		468	429	475
Filter Age	hrs	Client Info		468	429	475
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	16	13	15
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	<1	3
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	6	4	5
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	2	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.6	0.5	0.5
Nitration	Abs/cm	ASTM D7624*	>20	9.4	9.2	9.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.9	21.2	22.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	<1	<1
Boron	ppm	ASTM D5185(m)	0	2	0	1
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	60	61	59	58
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	1008	985	967
Calcium	ppm	ASTM D5185(m)	1070	1087	1057	1058
Phosphorus	ppm	ASTM D5185(m)	1150	1012	997	1008
Zinc	ppm	ASTM D5185(m)	1270	1230	1203	1197
Sulfur	ppm	ASTM D5185(m)	2060	2482	2504	2651
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.0	18.3	19.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.9	13.8	13.8

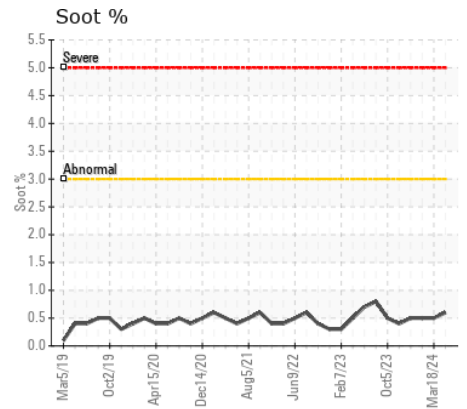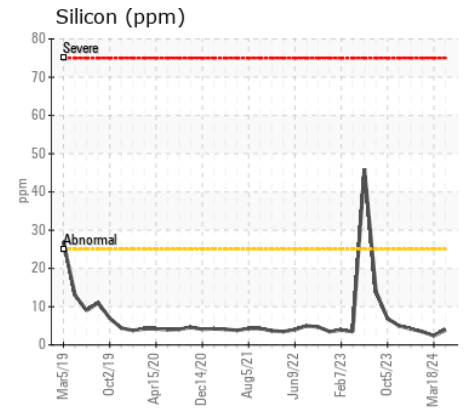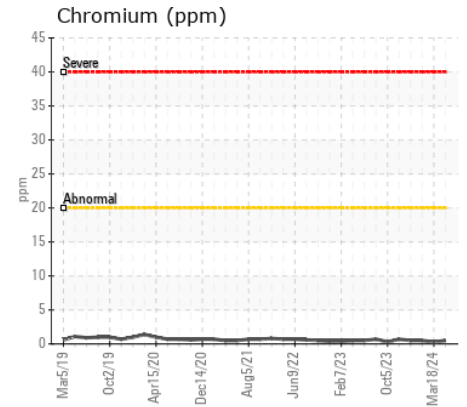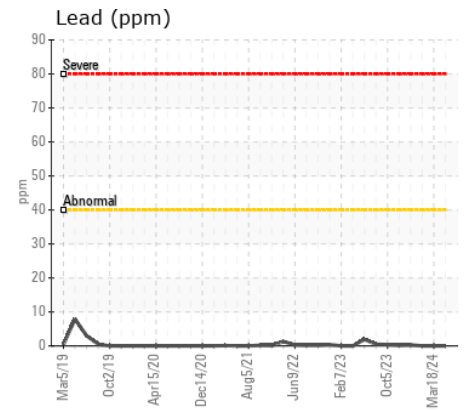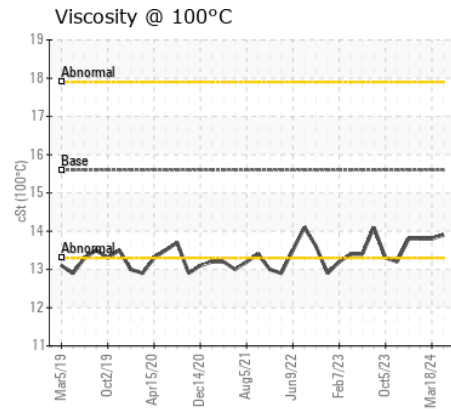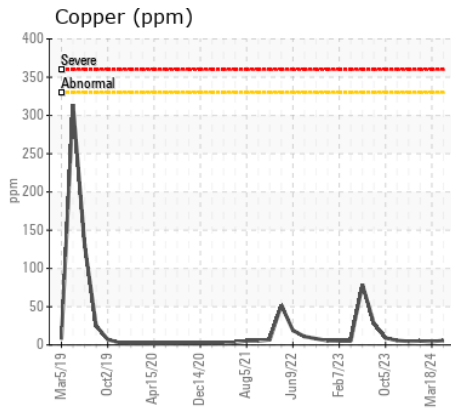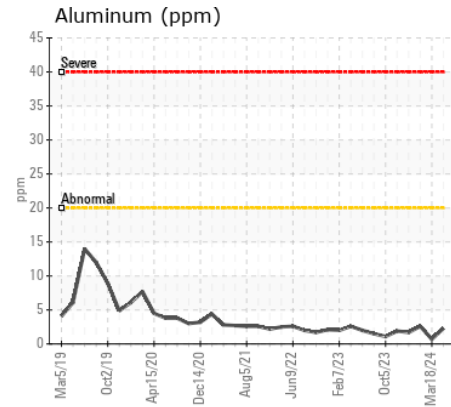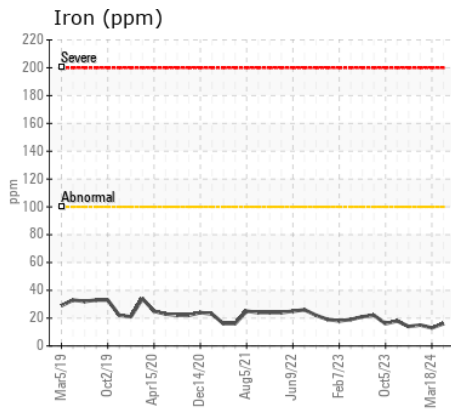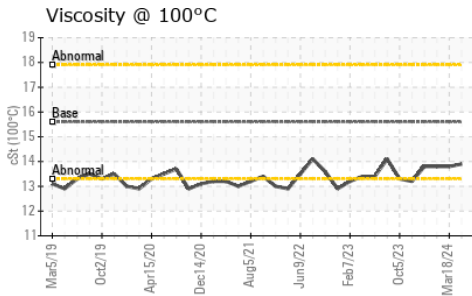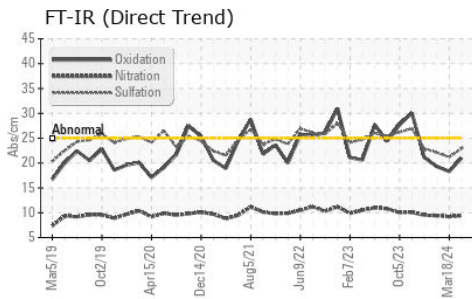

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0932515
Lab Number : 02633087
Unique Number : 5774240
Test Package : MOB 1

Received : 03 May 2024
Tested : 03 May 2024
Diagnosed : 03 May 2024 - Wes Davis

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.