



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 068244
Component
Splitter Box
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0288163	LH0278462	LH0224309
Sample Date		Client Info		25 Apr 2024	22 Mar 2024	21 Feb 2024
Machine Age	hrs	Client Info		9033	5517	8026
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>365	7	6	22
Chromium	ppm	ASTM D5185(m)	>6	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	1
Lead	ppm	ASTM D5185(m)	>5	0	0	<1
Copper	ppm	ASTM D5185(m)	>20	1	<1	2
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<1	0	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<1	<1	<1
Boron	ppm	ASTM D5185(m)	0	<1	2	5
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	<1	2	2	3
Calcium	ppm	ASTM D5185(m)	<1	15	9	22
Phosphorus	ppm	ASTM D5185(m)	2143	2184	2283	2285
Zinc	ppm	ASTM D5185(m)	<1	79	38	73
Sulfur	ppm	ASTM D5185(m)	23468	23408	24597	24237
Visc @ 40°C	cSt	ASTM D7279(m)	170	167	174	166

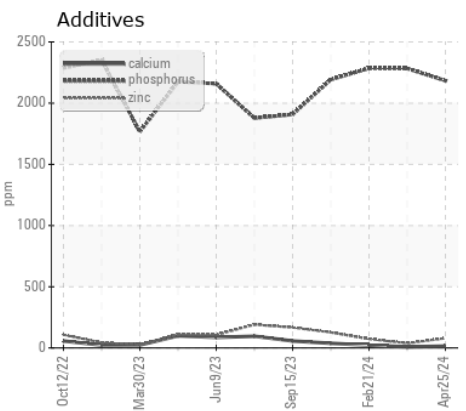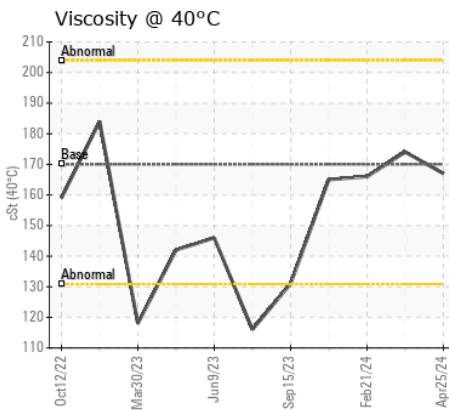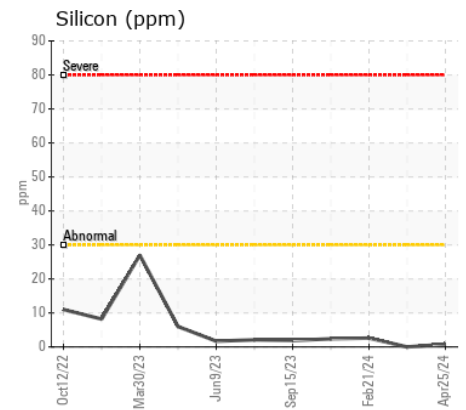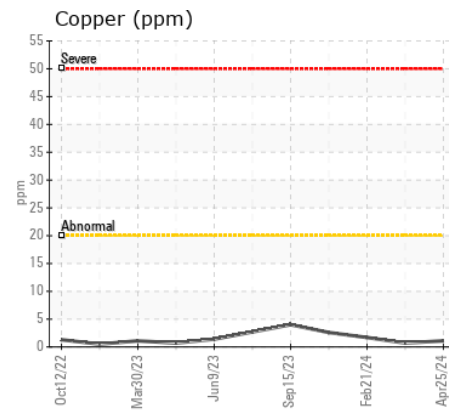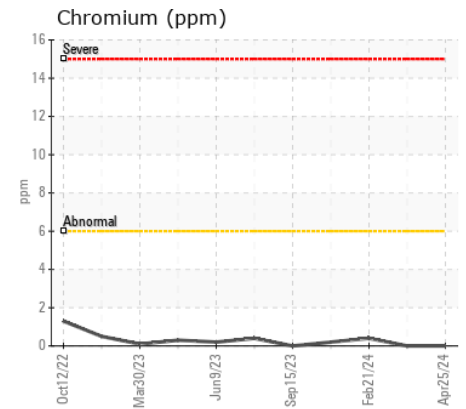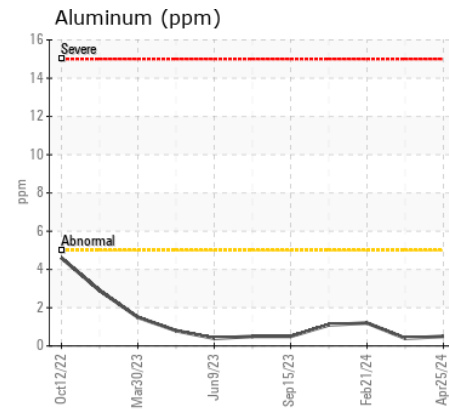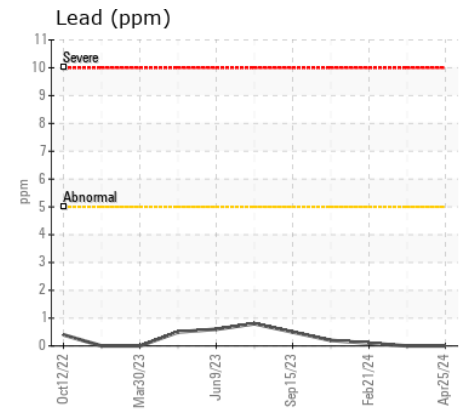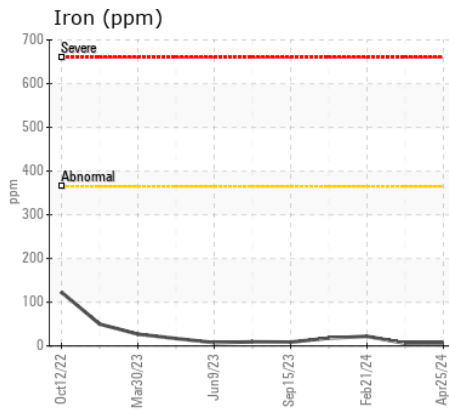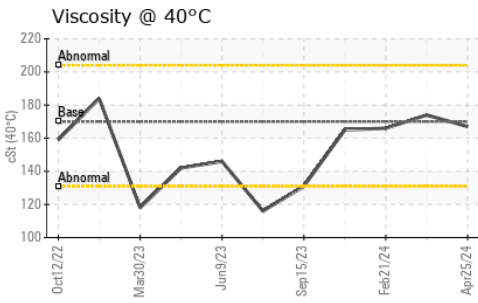

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288163
Lab Number : 02633283
Unique Number : 5774436
Test Package : MOB 1
Received : 03 May 2024
Tested : 03 May 2024
Diagnosed : 03 May 2024 - Wes Davis

Gerdau - Mandak Metal Processors Ltd.,
 1 Railway St., P.O. Box 334
 Selkirk, MB
 CA R1A 2B3
 Contact: Santiago Giraldo
 santiago.giraldo@gerdau.com
 T:
 F: (204)482-8241

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.