



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 070058-1761
Component
Diesel Engine
Fluid
CO-OP D-MO SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0246477	LH0260166
Sample Date		Client Info		03 May 2024	19 Jul 2023	19 May 2023
Machine Age	hrs	Client Info		3352	1494	1026
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	1	4	5
Chromium	ppm	ASTM D5185(m)	>5	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	3	3	3
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>125	<1	3	7
Tin	ppm	ASTM D5185(m)	>5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	5	7	9
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.6	9.5	10.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.5	21.2	33.1
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	3	3
Boron	ppm	ASTM D5185(m)		74	47	95
Barium	ppm	ASTM D5185(m)		0	<1	2
Molybdenum	ppm	ASTM D5185(m)		91	88	96
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		17	35	173
Calcium	ppm	ASTM D5185(m)		2184	2154	2231
Phosphorus	ppm	ASTM D5185(m)		1030	1074	1070
Zinc	ppm	ASTM D5185(m)	1420	1167	1188	1128
Sulfur	ppm	ASTM D5185(m)		3272	3205	3213
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.7	18.8	39.9
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	11.3	11.3	12.3

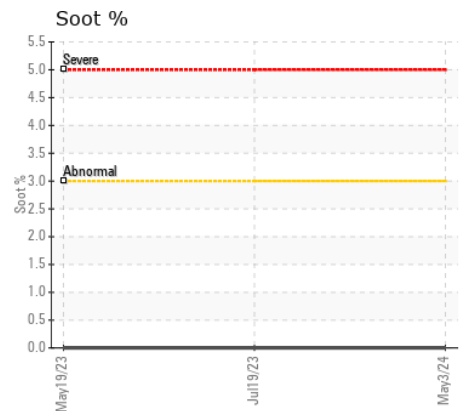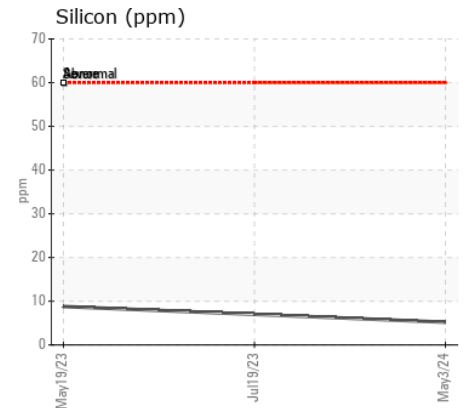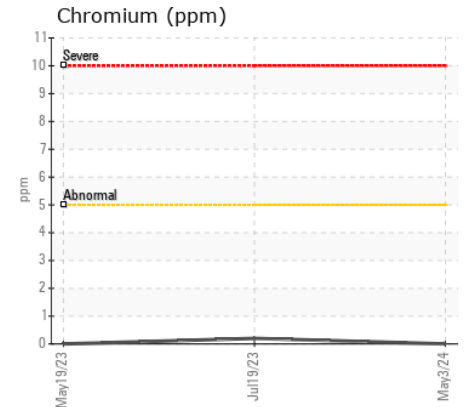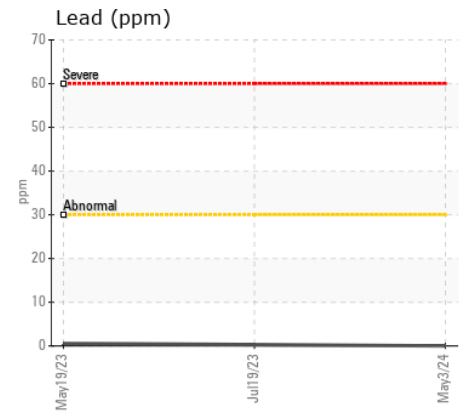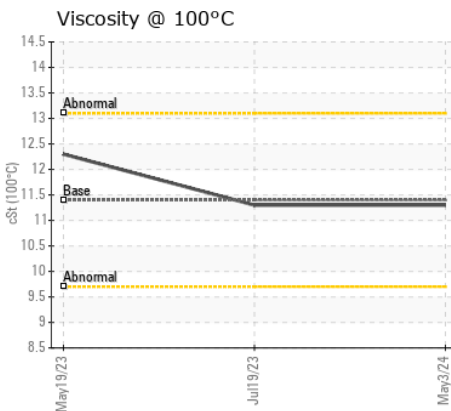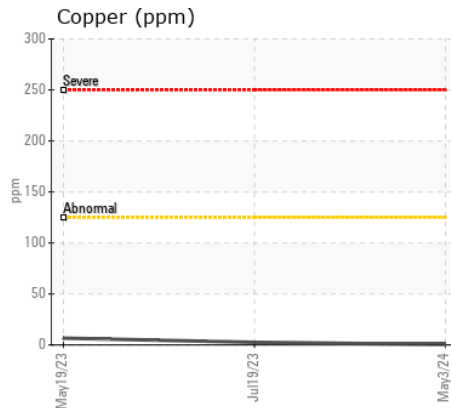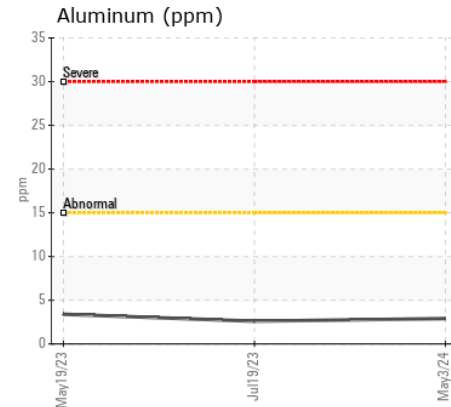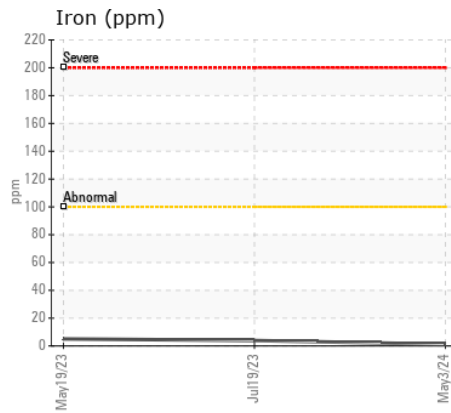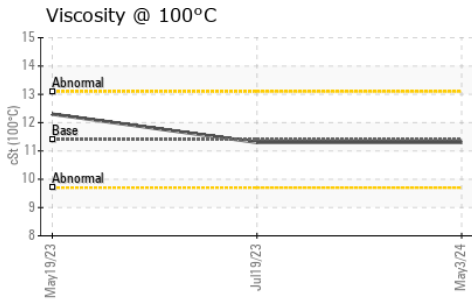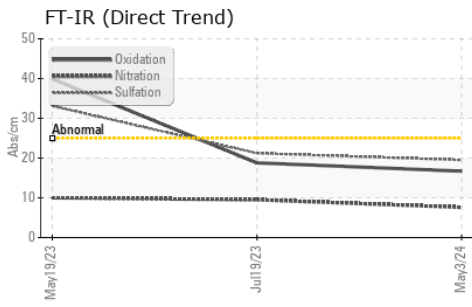

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Received** : 07 May 2024
Lab Number : 02633808 **Tested** : 07 May 2024
Unique Number : 5774961 **Diagnosed** : 07 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

Gravier Collet Gravel
 SW31-6-8W
 Notre Dame de Lourdes, MB
 CA R0G 1M0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: