



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**LIEBHERR LH30M 112545-1253**  
Component  
**Front Differential**  
Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289579	LH0270119	LH0247422
Sample Date		Client Info		06 May 2024	27 Sep 2023	13 Dec 2022
Machine Age	hrs	Client Info		15168	1297	10423
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>190	<1	<1	2
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>5	0	0	<1
Lead	ppm	ASTM D5185(m)	>15	0	<1	0
Copper	ppm	ASTM D5185(m)	>70	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	0	1	1
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	<1
Boron	ppm	ASTM D5185(m)	400	308	300	318
Barium	ppm	ASTM D5185(m)	200	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	12	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	12	1	3	2
Calcium	ppm	ASTM D5185(m)	150	12	11	15
Phosphorus	ppm	ASTM D5185(m)	1650	1179	1193	1301
Zinc	ppm	ASTM D5185(m)	125	9	10	6
Sulfur	ppm	ASTM D5185(m)	22500	20131	20521	20856
Visc @ 40°C	cSt	ASTM D7279(m)	109	106	104	101

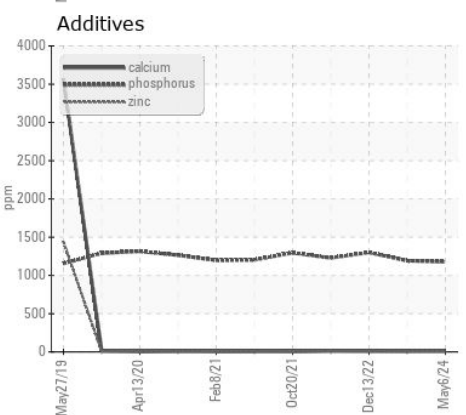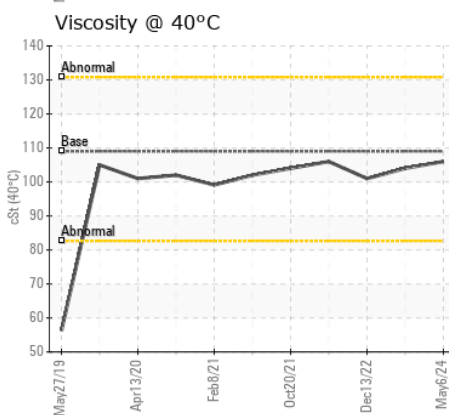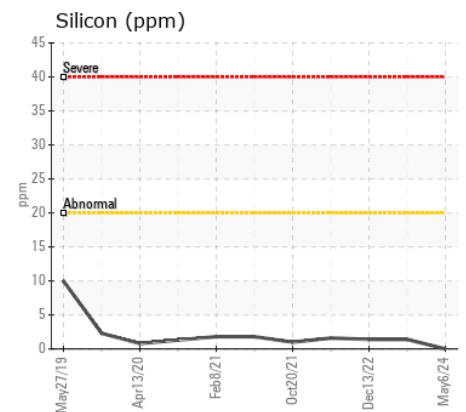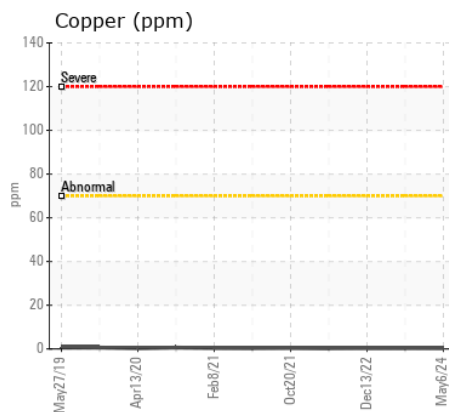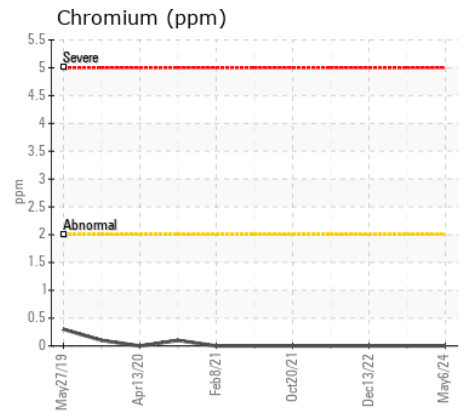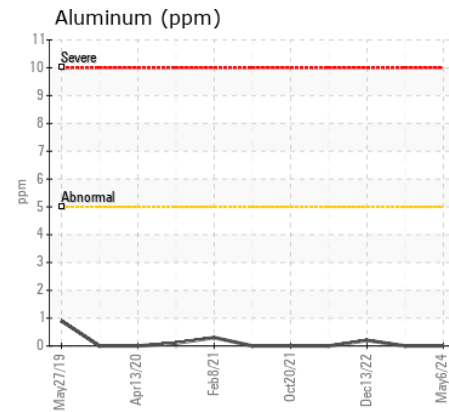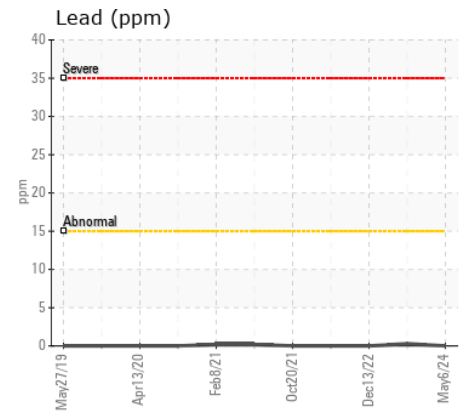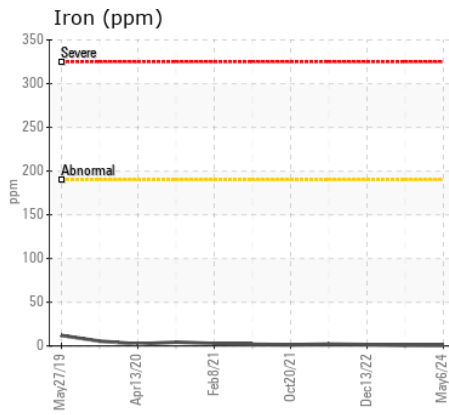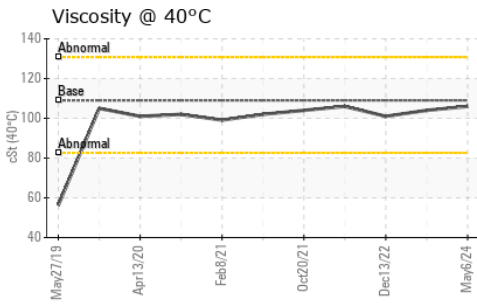

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0289579 **Received** : 07 May 2024  
**Lab Number** : 02633953 **Tested** : 07 May 2024  
**Unique Number** : 5775106 **Diagnosed** : 07 May 2024 - Wes Davis  
**Test Package** : MOB 1

**GREEN METALS CANADA**  
 224 BEARDS LANE  
 WOODSTOCK, ON  
 CA N4S 7W3  
 Contact: Jamie Depotie  
 jdepotie@gmcan.ca  
 T: (519)539-1313  
 F: (519)539-5130

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.