



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
801246
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088669	PC0075498	PC0071854
Sample Date		Client Info		04 May 2024	22 Aug 2023	13 Apr 2023
Machine Age	kms	Client Info		25543	160078	145534
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Iron	ppm	ASTM D5185(m)	>90	17	59	38
Chromium	ppm	ASTM D5185(m)	>20	<1	3	2
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	3	6	8
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	3	3
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	2	10	15
Potassium	ppm	ASTM D5185(m)	>20	2	5	7
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	0.0
Soot %	%	ASTM D7844*	>6	0.3	0.8	0.3
Nitration	Abs/cm	ASTM D7624*	>20	8.6	10.2	9.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	23.9	19.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		5	4	10
Boron	ppm	ASTM D5185(m)	2	11	3	13
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	54	62	63
Manganese	ppm	ASTM D5185(m)	0	<1	1	1
Magnesium	ppm	ASTM D5185(m)	950	830	1000	939
Calcium	ppm	ASTM D5185(m)	1050	1244	1099	1114
Phosphorus	ppm	ASTM D5185(m)	995	982	1064	1058
Zinc	ppm	ASTM D5185(m)	1180	1147	1250	1176
Sulfur	ppm	ASTM D5185(m)	2600	2563	2260	2595
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.9	19.1	16.2
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	72.9	77.5	79.5
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	11.6	11.9
Viscosity Index (VI)	Scale	ASTM D2270*	144	147	142	144

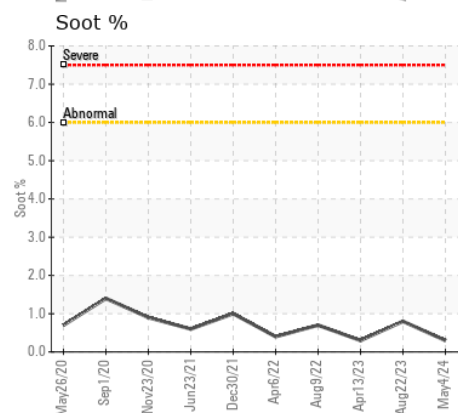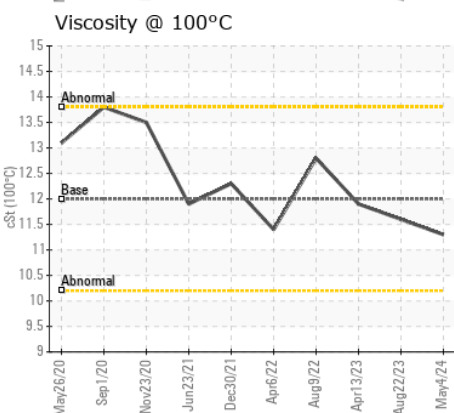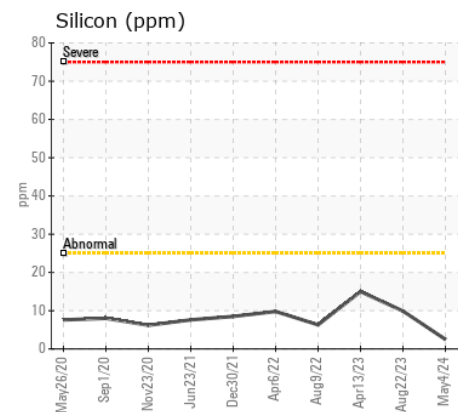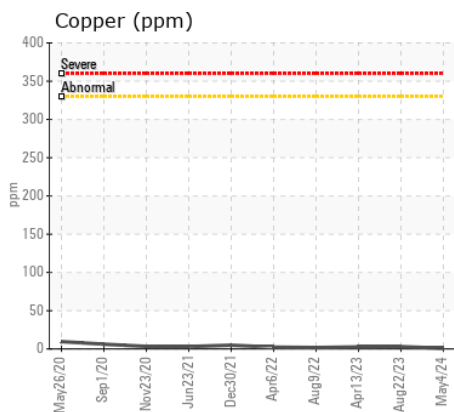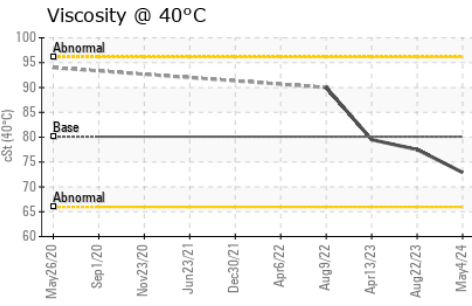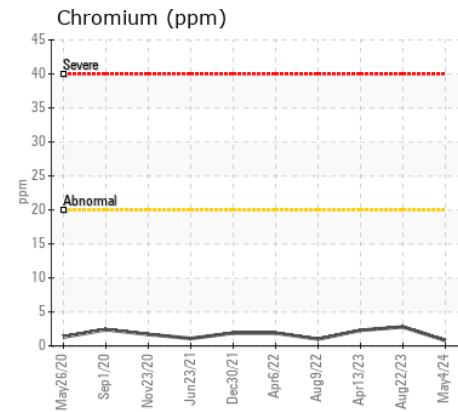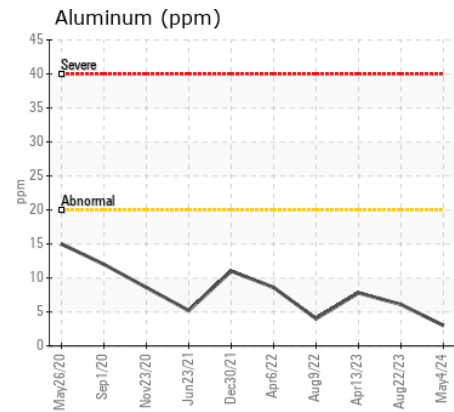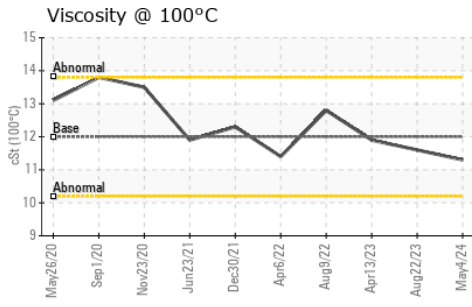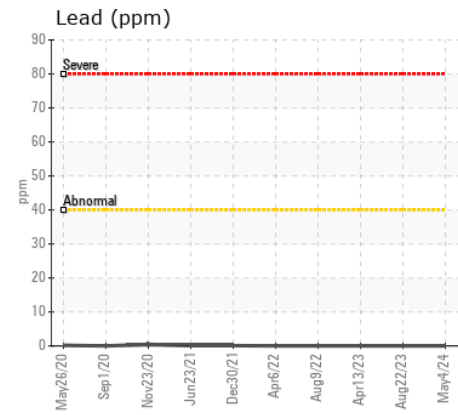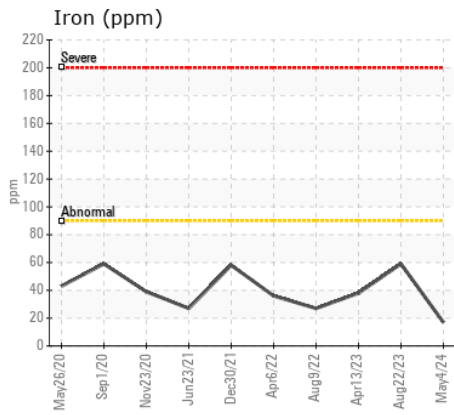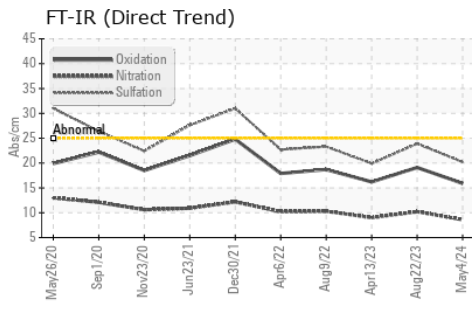

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088669
Lab Number : 02634271
Unique Number : 5775424
Test Package : MOB 1 (Additional Tests: KV40, VI)
Received : 09 May 2024
Tested : 09 May 2024
Diagnosed : 09 May 2024 - Wes Davis

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: