



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
33265
 Component
Transmission (Auto)
 Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL LS 80W90. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0692673	---	---
Sample Date		Client Info		02 May 2024	---	---
Machine Age	hrs	Client Info		5140	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>160	108	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<1	---	---
Lead	ppm	ASTM D5185(m)	>50	2	---	---
Copper	ppm	ASTM D5185(m)	>225	17	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>20	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	HAZY	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)	150	3	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)	10	3	---	---
Calcium	ppm	ASTM D5185(m)	70	16	---	---
Phosphorus	ppm	ASTM D5185(m)	2000	2559	---	---
Zinc	ppm	ASTM D5185(m)	50	23	---	---
Sulfur	ppm	ASTM D5185(m)	20000	23934	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	140	139	---	---

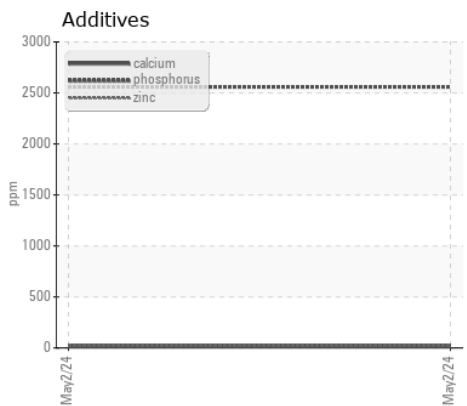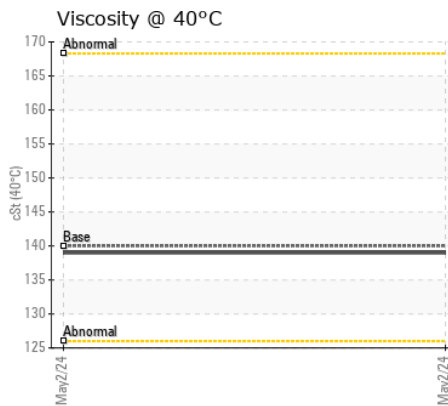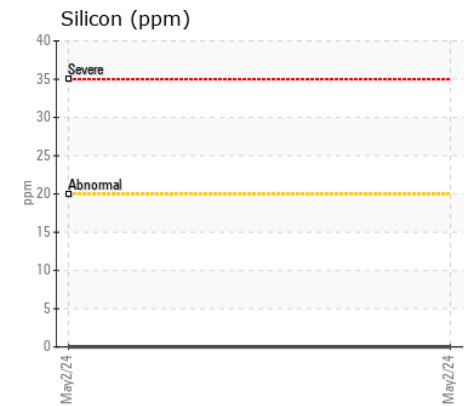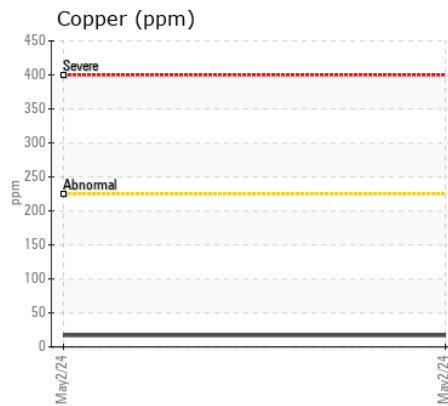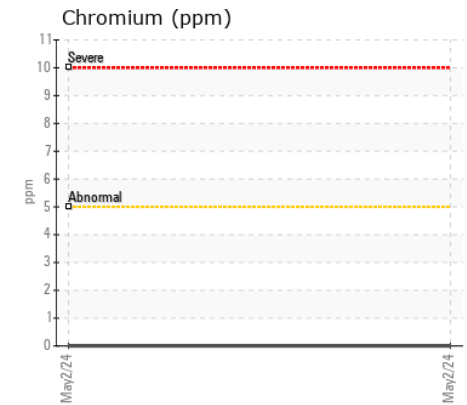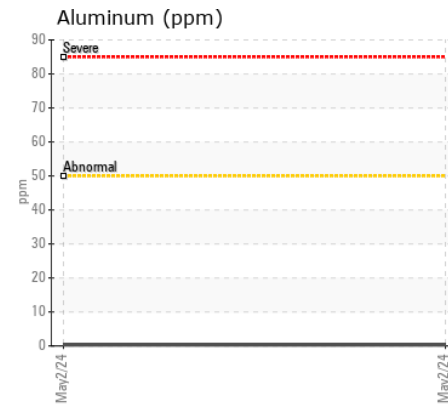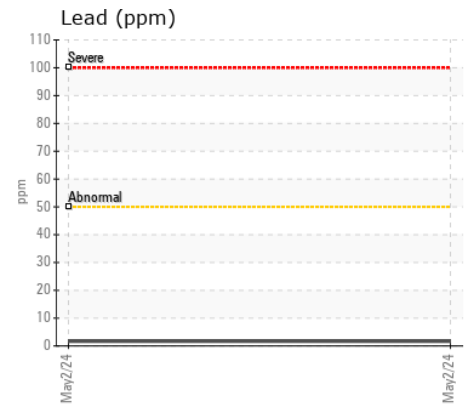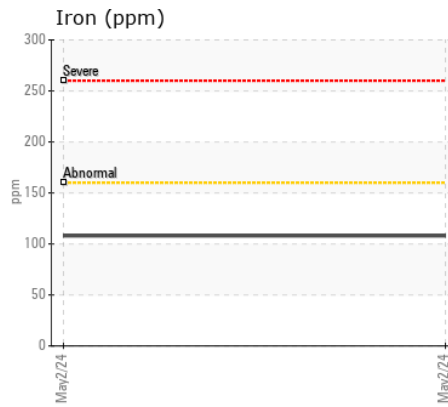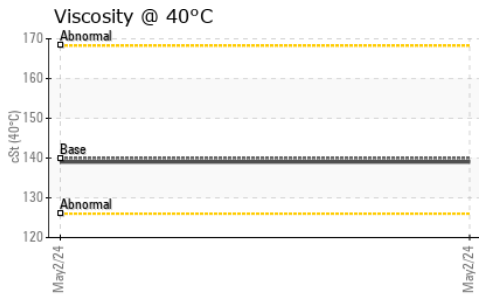

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0692673
Lab Number : 02634379
Unique Number : 5775532
Test Package : MOB 1
Received : 09 May 2024
Tested : 09 May 2024
Diagnosed : 10 May 2024 - Kevin Marson

C G EQUIPMENT
 38 MAIN STREET
 ZURICH, ON
 CA N0M 2T0
 Contact: Dwayne Martin
 dwayne@cgequipment.com
 T: (519)236-4099
 F: (519)236-7330

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.