



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2103
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0932500	WC0913057	WC0883007
Sample Date		Client Info		09 May 2024	18 Mar 2024	06 Feb 2024
Machine Age	hrs	Client Info		13897	13399	12838
Oil Age	hrs	Client Info		500	562	477
Filter Age	hrs	Client Info		500	562	477
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	9	11	12
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	3	3	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.4	0.3
Nitration	Abs/cm	ASTM D7624*	>20	8.2	8.4	8.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.8	20.7	21.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	1	<1
Boron	ppm	ASTM D5185(m)	250	2	0	2
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	58	60	58
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	450	955	985	959
Calcium	ppm	ASTM D5185(m)	3000	1044	1070	1092
Phosphorus	ppm	ASTM D5185(m)	1150	964	1005	1016
Zinc	ppm	ASTM D5185(m)	1350	1190	1212	1186
Sulfur	ppm	ASTM D5185(m)	4250	2519	2550	2770
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.0	18.3	18.7
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	12.8	12.9	13.0

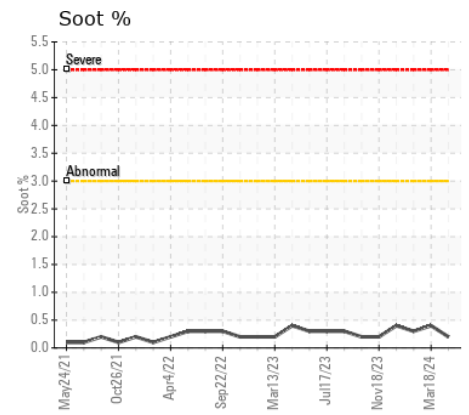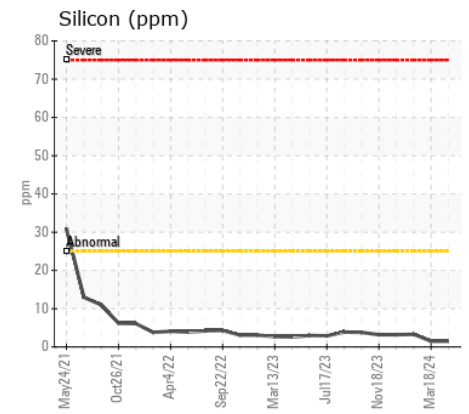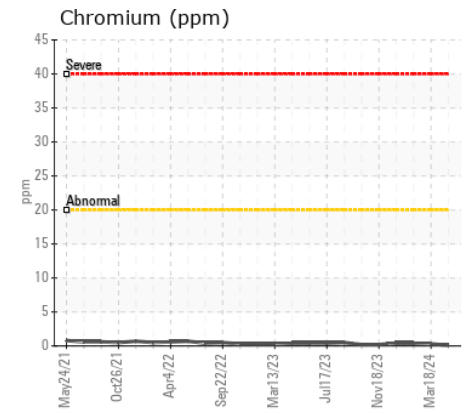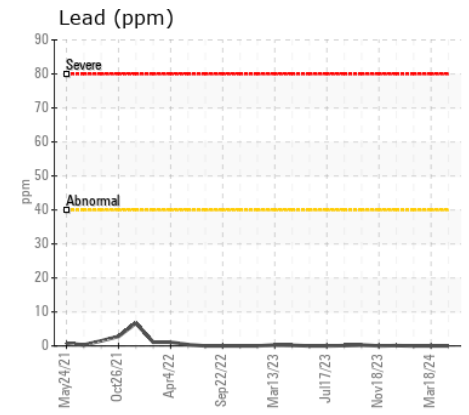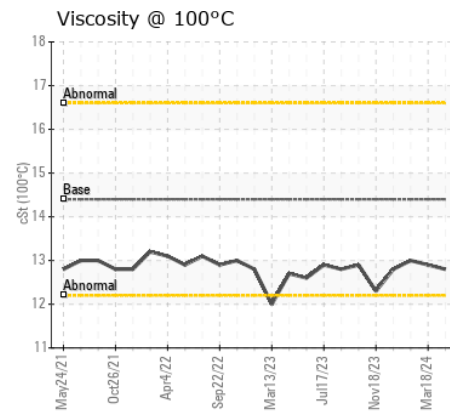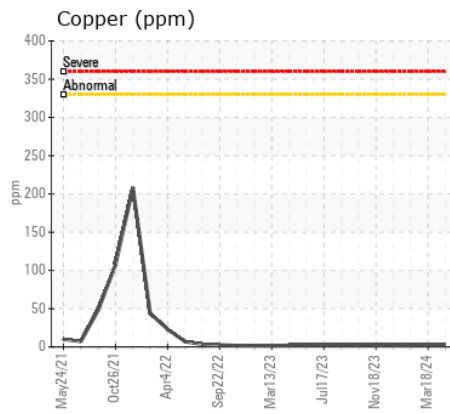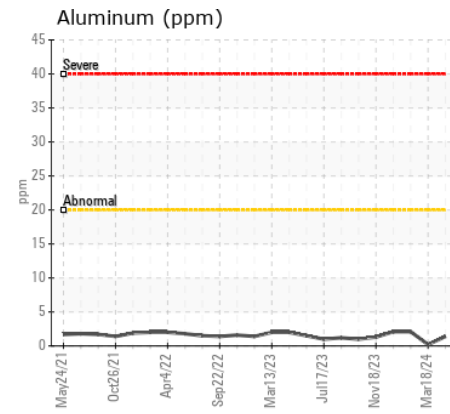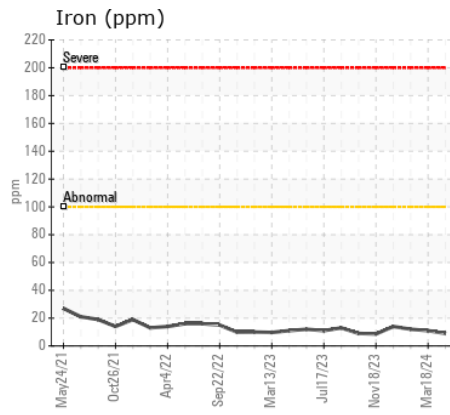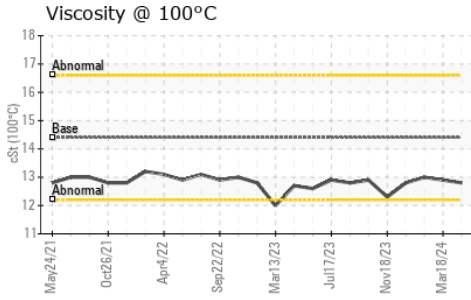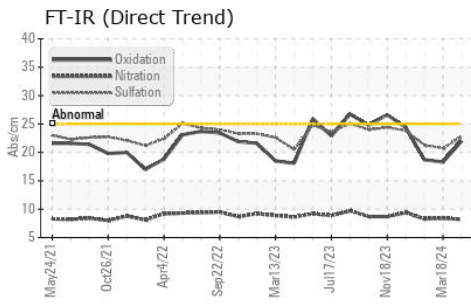

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0932500
Lab Number : 02634485
Unique Number : 5775638
Test Package : MOB 1

Received : 10 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.