



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 077508
Component
Rear Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	---	---
Sample Date		Client Info		01 May 2024	---	---
Machine Age	hrs	Client Info		16364	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>150	57	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>4	0	---	---
Aluminum	ppm	ASTM D5185(m)	>7	<1	---	---
Lead	ppm	ASTM D5185(m)	>4	0	---	---
Copper	ppm	ASTM D5185(m)	>135	5	---	---
Tin	ppm	ASTM D5185(m)	>3	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>30	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	400	178	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	12	24	---	---
Calcium	ppm	ASTM D5185(m)	150	20	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1145	---	---
Zinc	ppm	ASTM D5185(m)	125	43	---	---
Sulfur	ppm	ASTM D5185(m)	22500	21873	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	91.3	---	---

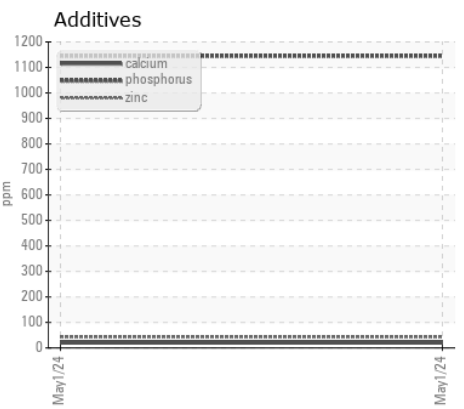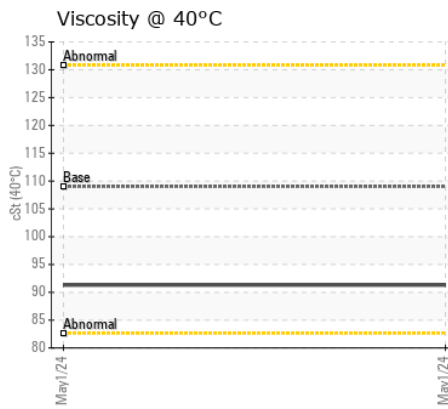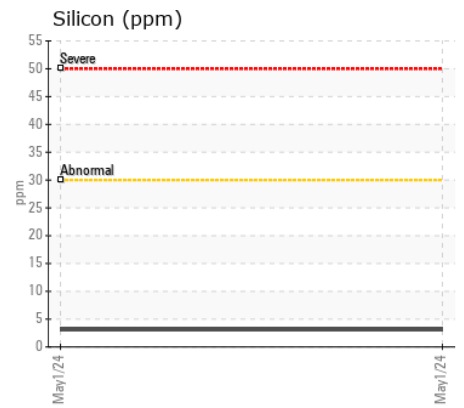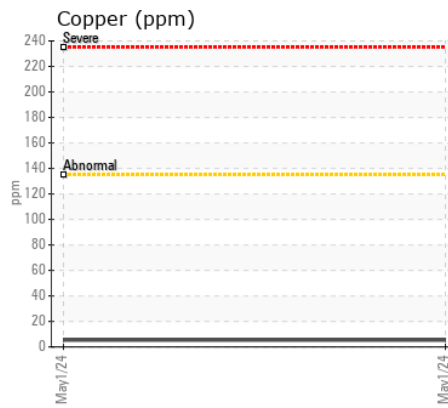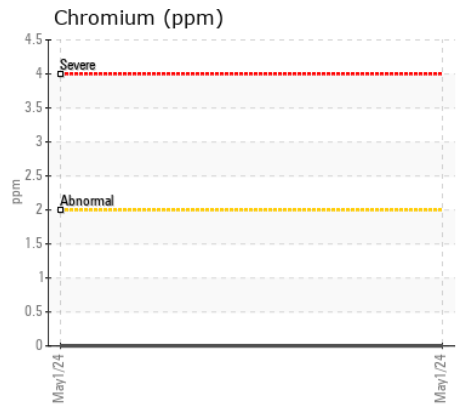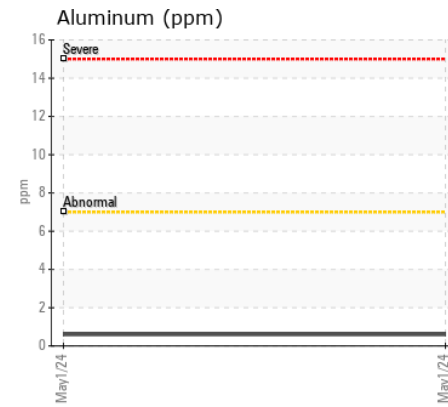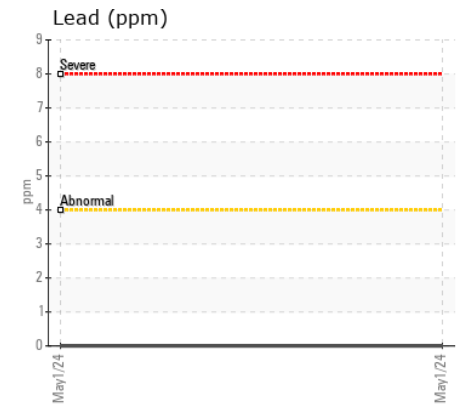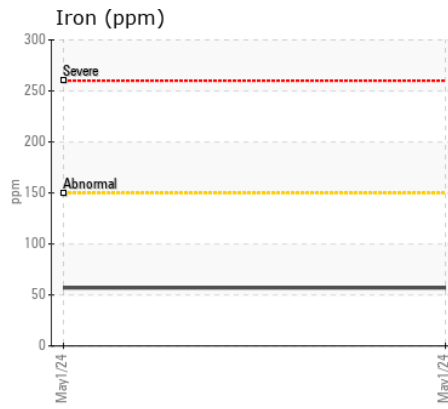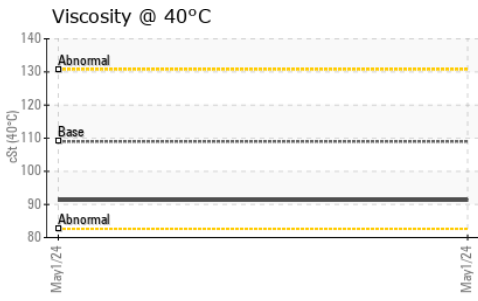

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Received** : 13 May 2024
Lab Number : 02635014 **Tested** : 13 May 2024
Unique Number : 5776167 **Diagnosed** : 13 May 2024 - Wes Davis
Test Package : MOB 1

J.M. BASTILLE ACIER INC
 396 RUE TEMISCOUATA,, CP 744
 RIVIERE DU LOUP, QC
 CA G5R 3Z3
 Contact: MANAGER SERVICE

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (418)862-3346
 F: