



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[8-402604]

Machine Id
16-8022

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP448183	VCP393101	VCP353279
Sample Date		Client Info		01 May 2024	16 Jan 2024	01 Nov 2023
Machine Age	hrs	Client Info		9497	8987	8564
Oil Age	hrs	Client Info		500	1000	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>140	72	68	62
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	1	1	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>100	3	3	2
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	2	2	2
Potassium	ppm	ASTM D5185(m)	>20	1	1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	1	1
Boron	ppm	ASTM D5185(m)	187	77	76	82
Barium	ppm	ASTM D5185(m)	0.0	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	0	<1	<1
Manganese	ppm	ASTM D5185(m)	0.0	1	<1	<1
Magnesium	ppm	ASTM D5185(m)	6.8	11	10	10
Calcium	ppm	ASTM D5185(m)	215	102	102	99
Phosphorus	ppm	ASTM D5185(m)	445	205	205	205
Zinc	ppm	ASTM D5185(m)	56	41	35	32
Sulfur	ppm	ASTM D5185(m)	1336	1666	1794	1662
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	28.6	28.7	28.1

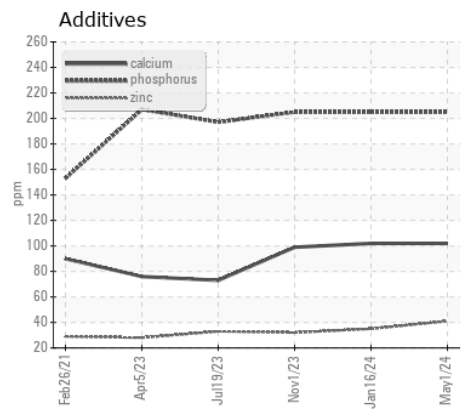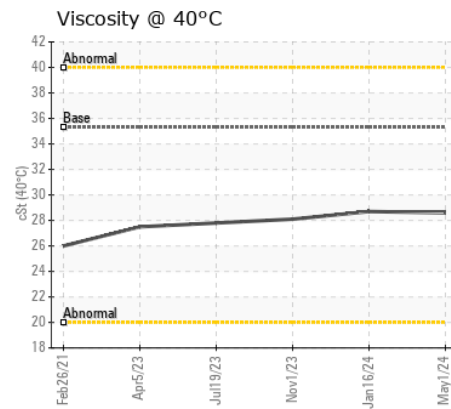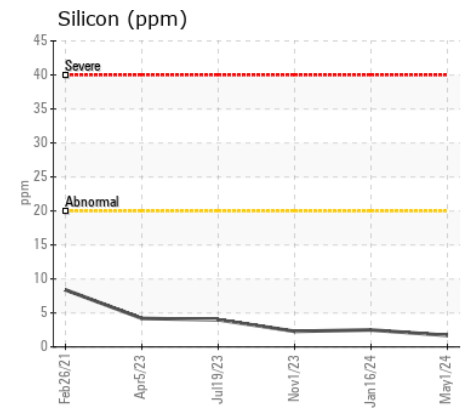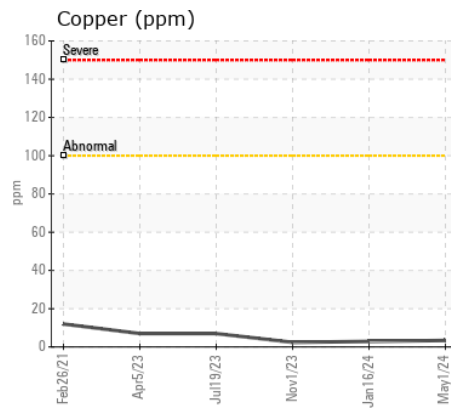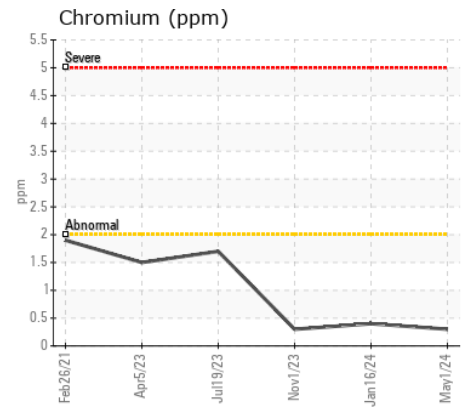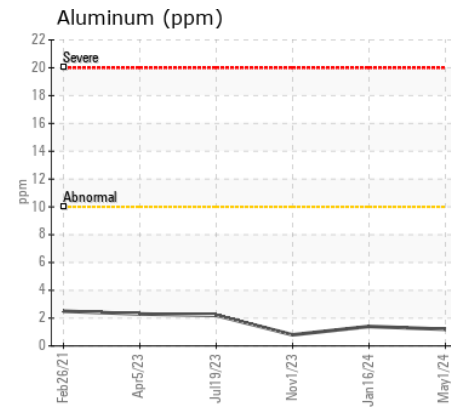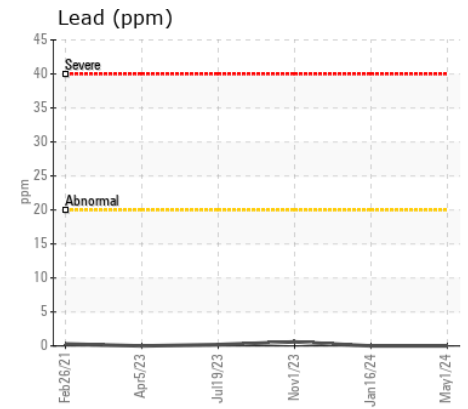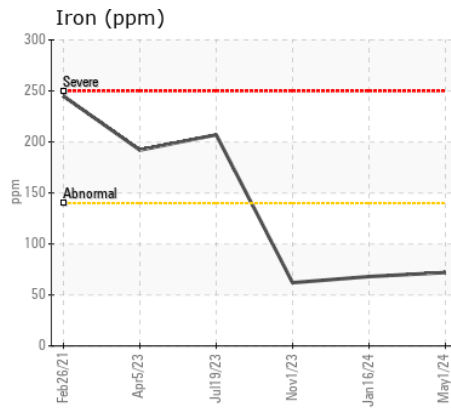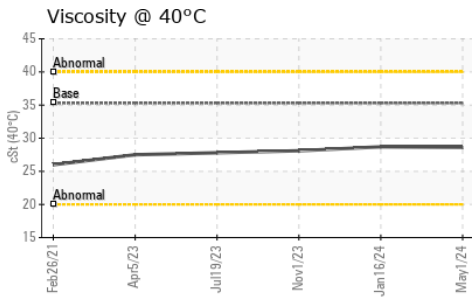

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : VCP448183

Lab Number : 02635706

Unique Number : 5776859

Test Package : MOB 1

Received : 15 May 2024

Tested : 16 May 2024

Diagnosed : 16 May 2024 - Wes Davis

CRH CANADA GROUP INC.

P.O. BOX 5400

CONCORD, ON

CA L4K 1B6

Contact: Dan Brown

dan.brown@ca.crh.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.