



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WIRTGEN 266-0801

Component
Drop Box

Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088723	---	---
Sample Date		Client Info		05 May 2024	---	---
Machine Age	hrs	Client Info		7880	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>400	12	---	---
Chromium	ppm	ASTM D5185(m)	>4	0	---	---
Nickel	ppm	ASTM D5185(m)	>3	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	0	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>50	<1	---	---
Tin	ppm	ASTM D5185(m)	>3	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>60	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	400	247	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	12	<1	---	---
Calcium	ppm	ASTM D5185(m)	150	15	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1213	---	---
Zinc	ppm	ASTM D5185(m)	125	36	---	---
Sulfur	ppm	ASTM D5185(m)	22500	19302	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	97.4	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	16.0	13.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	157	143	---	---

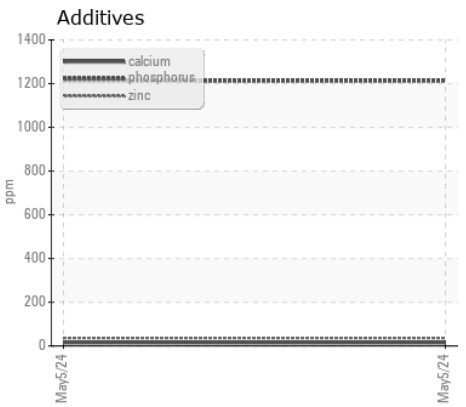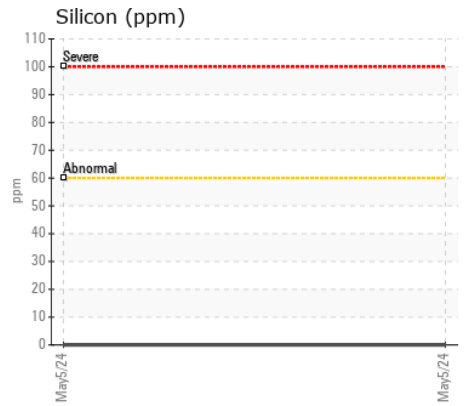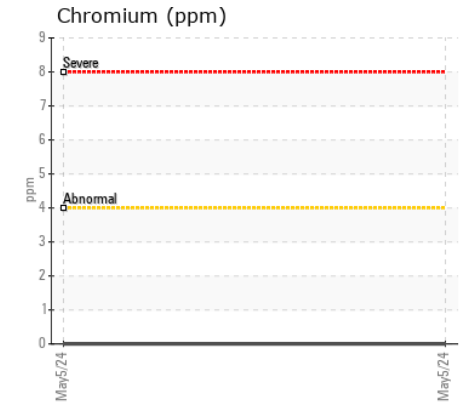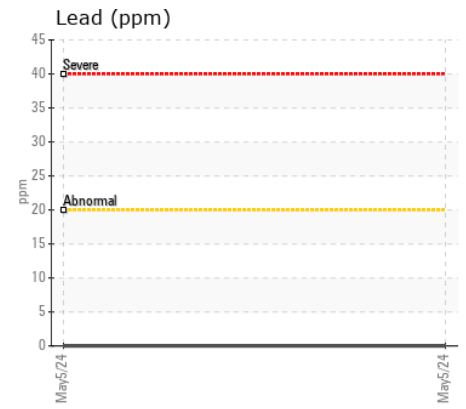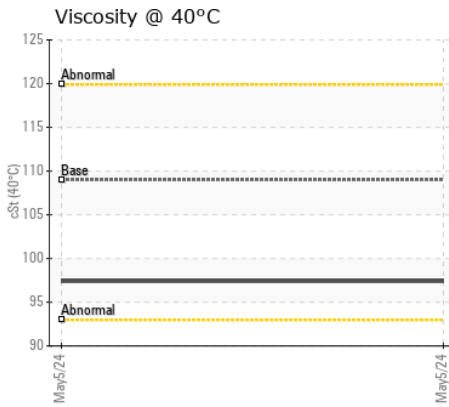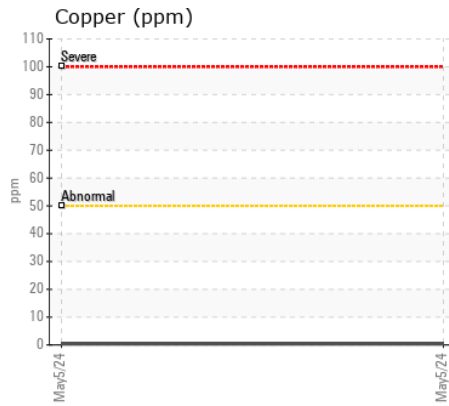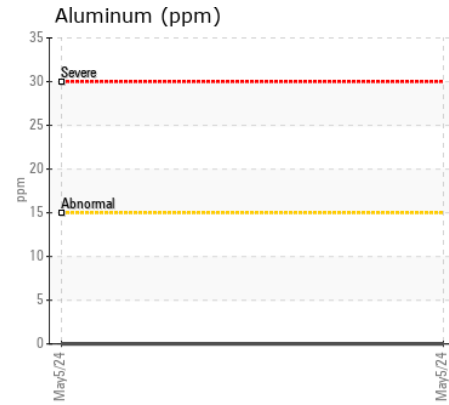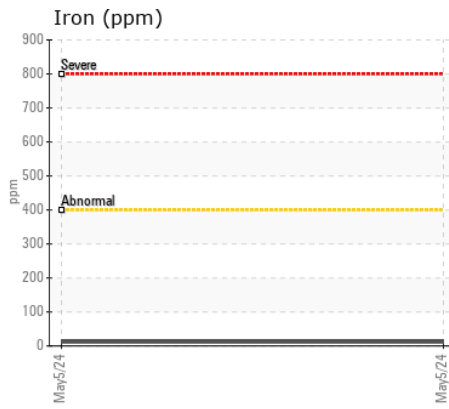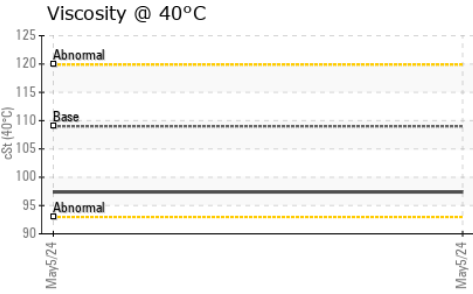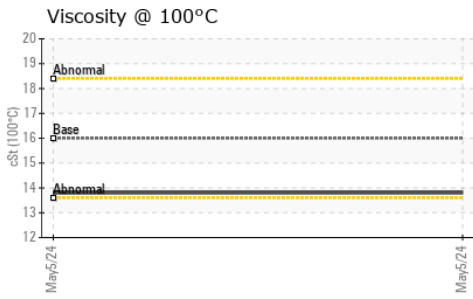

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088723 **Received** : 15 May 2024
Lab Number : 02635759 **Tested** : 15 May 2024
Unique Number : 5776912 **Diagnosed** : 15 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886