



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**GFL216**  
Machine Id  
**401179**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0121939</b>	GFL0111707	GFL0093787
Sample Date		Client Info		<b>11 May 2024</b>	28 Feb 2024	11 Sep 2023
Machine Age	kms	Client Info		<b>688070</b>	2311	666138
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	<b>7</b>	5	4
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>4	<b>0</b>	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.3</b>	8.7	8.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.6</b>	18.4	18.5
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	3
Boron	ppm	ASTM D5185(m)	0	<b>3</b>	3	4
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	59	60
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>953</b>	960	956
Calcium	ppm	ASTM D5185(m)	1070	<b>1029</b>	1064	1052
Phosphorus	ppm	ASTM D5185(m)	1150	<b>989</b>	1038	993
Zinc	ppm	ASTM D5185(m)	1270	<b>1174</b>	1187	1189
Sulfur	ppm	ASTM D5185(m)	2060	<b>2526</b>	2771	2538
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.3</b>	15.3	14.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.8</b>	13.5	13.5

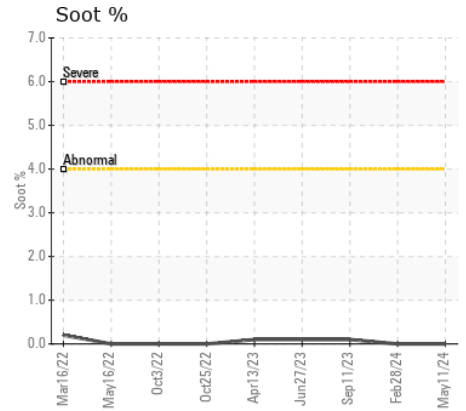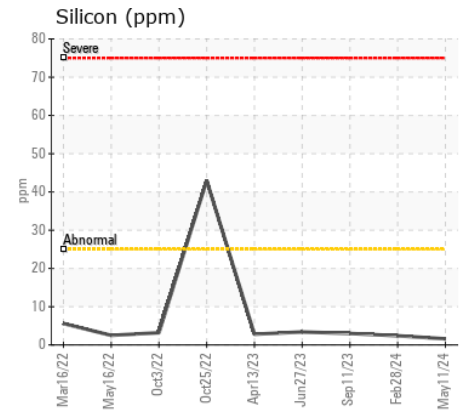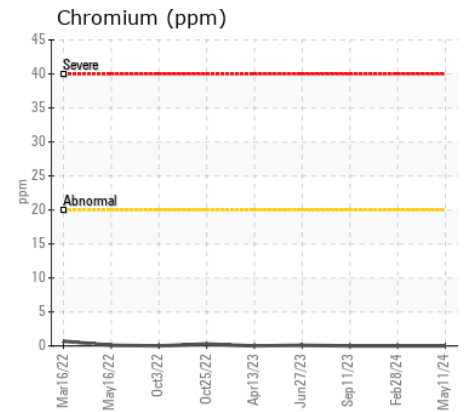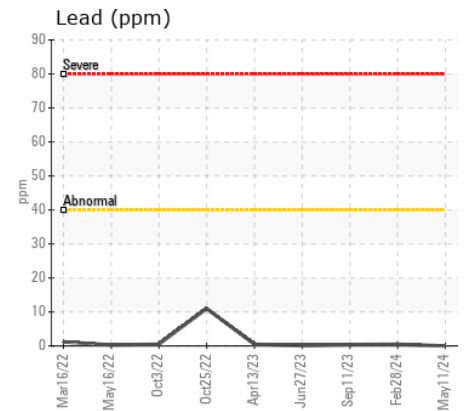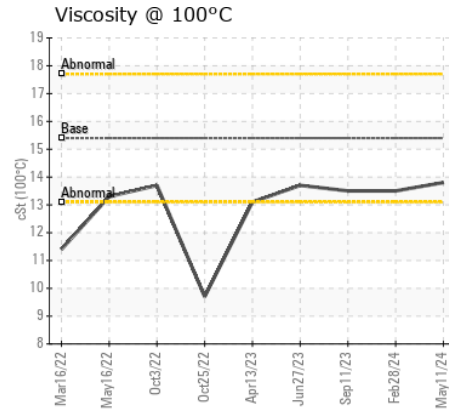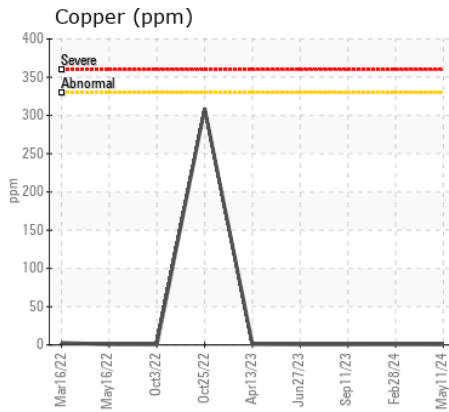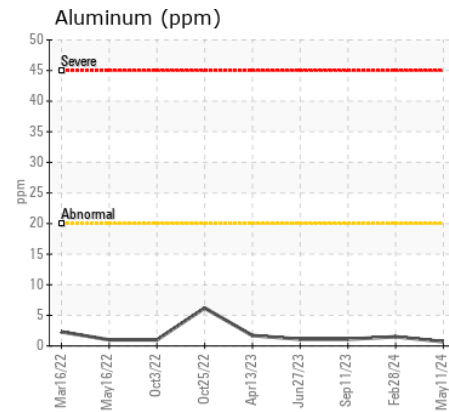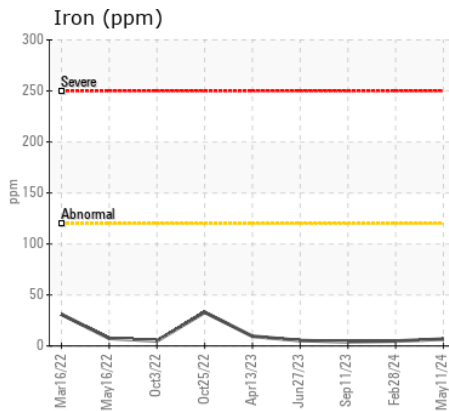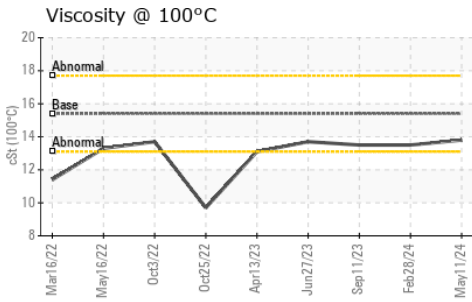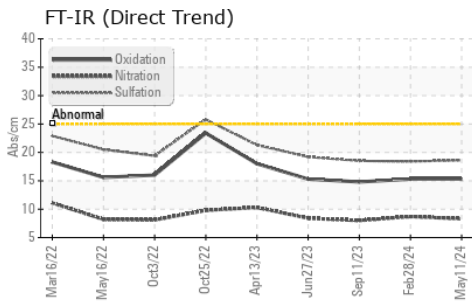

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0121939  
**Lab Number** : 02636300  
**Unique Number** : 5785462  
**Test Package** : MOB 1

**GFL Environmental - 252 - GTA Hauling**  
 3668 Weston Road  
 North York, ON  
 CA M9L 1W2  
 Contact: Amanda Cipollone  
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: