



Machine Id
731126
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0080096	GFL0044747	GFL0021656
Sample Date		Client Info		31 Mar 2024	30 Oct 2022	20 Feb 2022
Machine Age	hrs	Client Info		6377	3512	2149
Oil Age	hrs	Client Info		600	1200	600
Filter Age	hrs	Client Info		600	1200	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	5	23	73
Chromium	ppm	ASTM D5185(m)	>4	0	2	3
Nickel	ppm	ASTM D5185(m)	>2	0	1	2
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>9	<1	3	5
Lead	ppm	ASTM D5185(m)	>30	<1	2	5
Copper	ppm	ASTM D5185(m)	>35	<1	3	14
Tin	ppm	ASTM D5185(m)	>4	0	<1	3
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>+100	4	4	21
Potassium	ppm	ASTM D5185(m)	>20	<1	0	3
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.3	10.4	13.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	23.7	28.3
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	3	6
Boron	ppm	ASTM D5185(m)	50	33	2	9
Barium	ppm	ASTM D5185(m)	5	0	0	1
Molybdenum	ppm	ASTM D5185(m)	50	49	72	83
Manganese	ppm	ASTM D5185(m)	0	<1	1	8
Magnesium	ppm	ASTM D5185(m)	560	526	1048	726
Calcium	ppm	ASTM D5185(m)	1510	1507	1288	1535
Phosphorus	ppm	ASTM D5185(m)	780	713	1080	879
Zinc	ppm	ASTM D5185(m)	870	857	1351	1030
Sulfur	ppm	ASTM D5185(m)	2040	1965	2544	2219
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.7	16.5	22.9
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.7	14.3	13.8

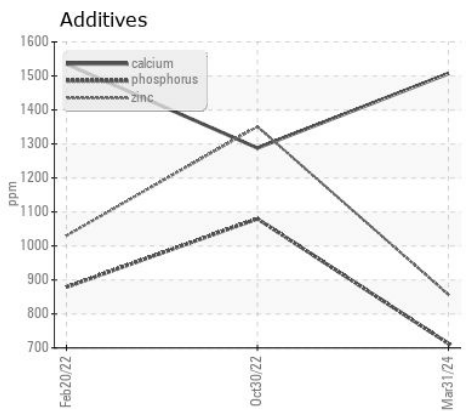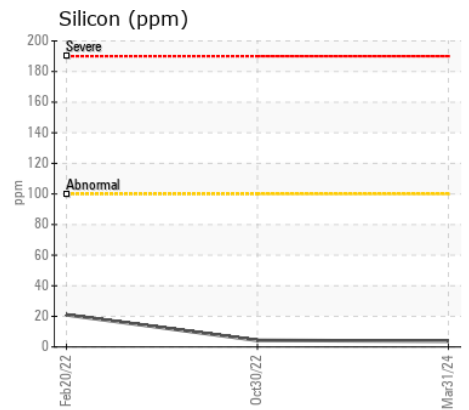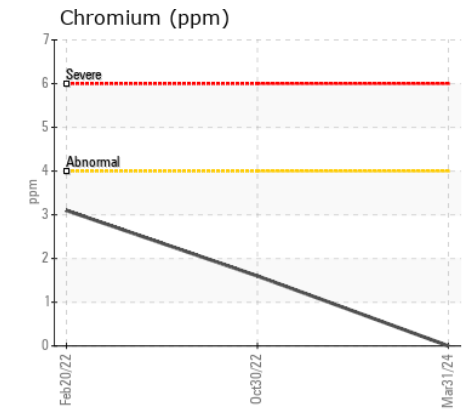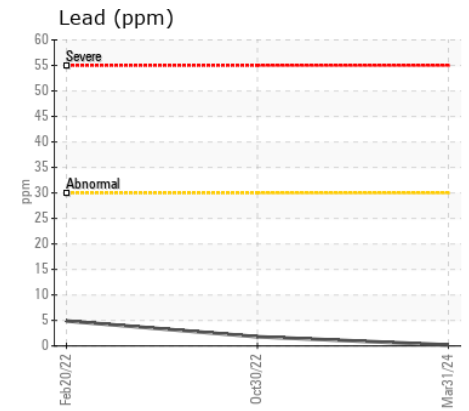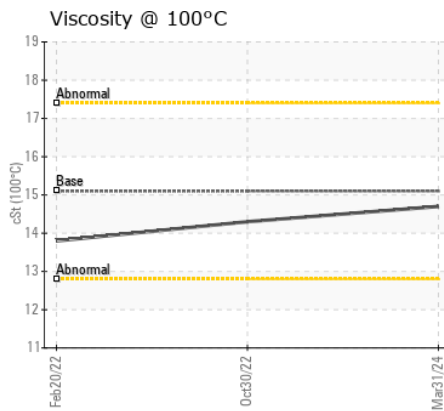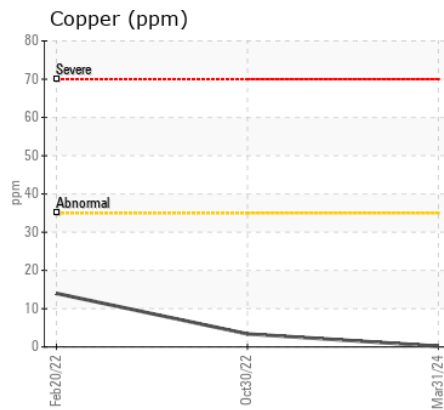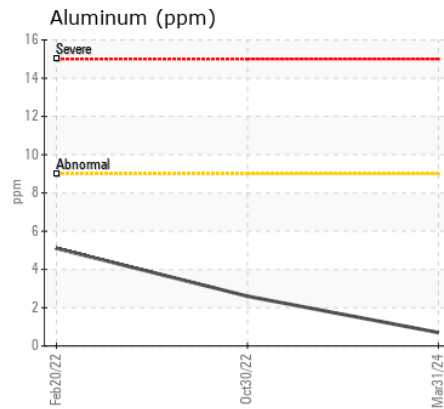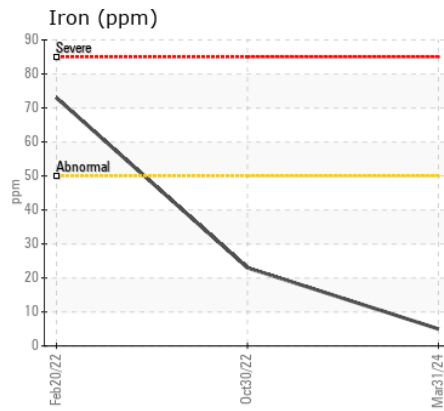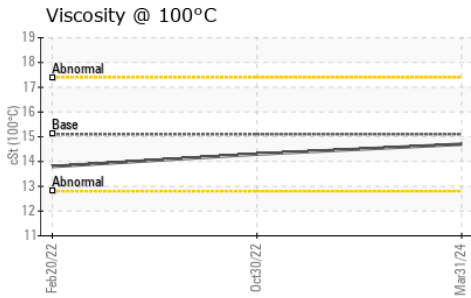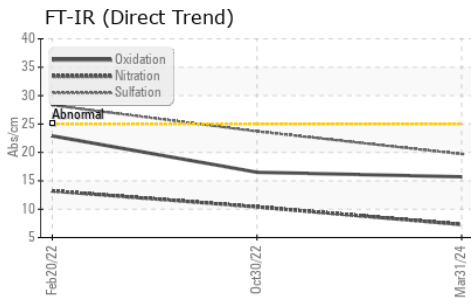

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0080096
Lab Number : 02636844
Unique Number : 5786006
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 577 - First Class
 8540 Chilliwack Mountain Rd,
 Chilliwack, BC
 CA V2R 3W8
 Contact: Derek Jessop
 djessop@gflenv.com
 T: (604)798-5301
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.