



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 151293-1216
Component
Splitter Box
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0290907	LH0281562	---
Sample Date		Client Info		21 May 2024	07 Dec 2023	---
Machine Age	hrs	Client Info		1496	616	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	16	9	---
Chromium	ppm	ASTM D5185(m)	>2	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	---
Lead	ppm	ASTM D5185(m)	>2	0	<1	---
Copper	ppm	ASTM D5185(m)	>10	<1	1	---
Tin	ppm	ASTM D5185(m)	>2	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>10	0	3	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	2	4	---
Boron	ppm	ASTM D5185(m)	400	190	1	---
Barium	ppm	ASTM D5185(m)	200	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)	12	0	0	---
Manganese	ppm	ASTM D5185(m)		<1	0	---
Magnesium	ppm	ASTM D5185(m)	12	2	8	---
Calcium	ppm	ASTM D5185(m)	150	11	1324	---
Phosphorus	ppm	ASTM D5185(m)	1650	1379	608	---
Zinc	ppm	ASTM D5185(m)	125	16	714	---
Sulfur	ppm	ASTM D5185(m)	22500	21956	3911	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	118	45.4	---

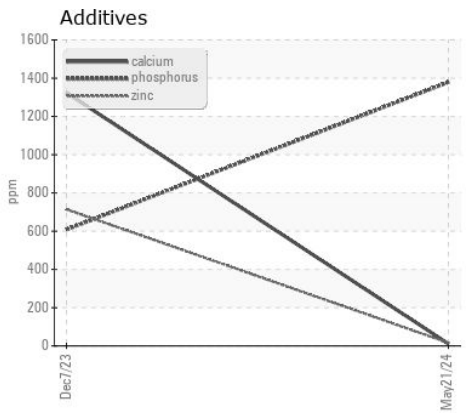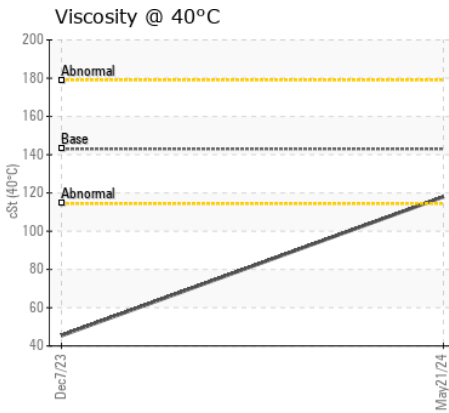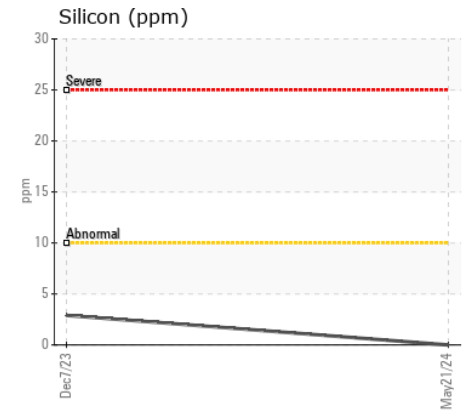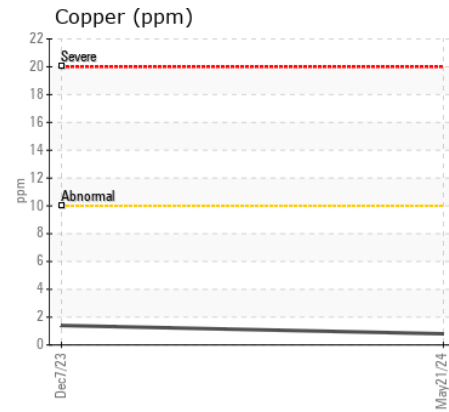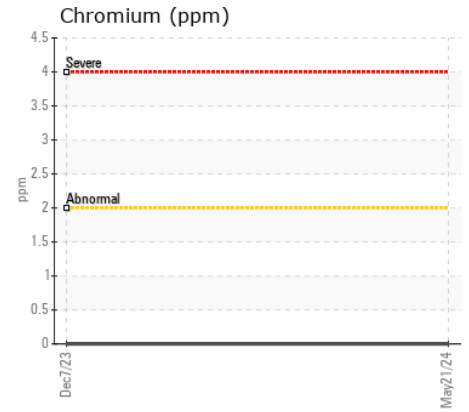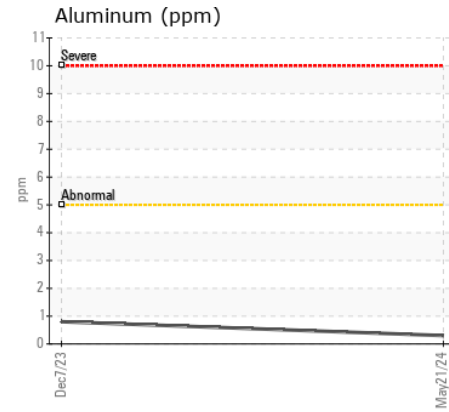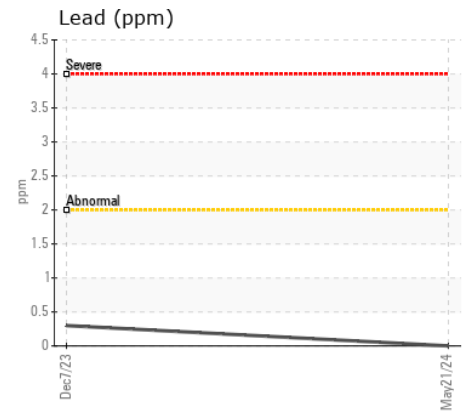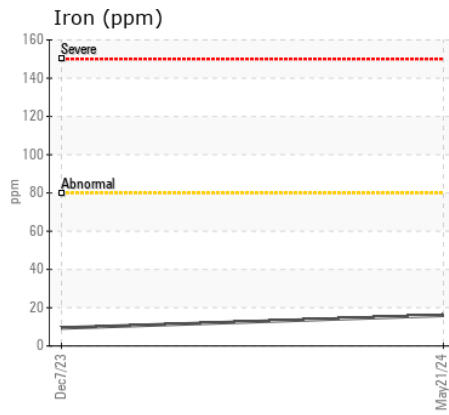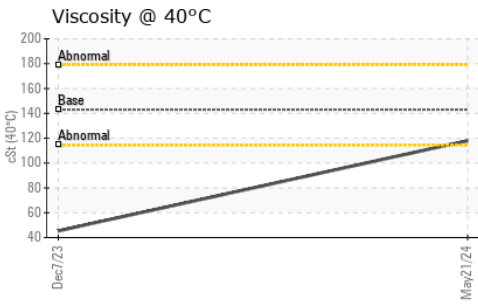

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0290907 **Received** : 22 May 2024
Lab Number : 02636988 **Tested** : 22 May 2024
Unique Number : 5786150 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : MOB 1

1625066 ONTARIO LTD.
 870 MACKAY RD
 PICKERING, ON
 CA L1W 2Y4
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: