



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
EXCAVATION JEAN LECLERC [405211]

Machine Id
VOLVO L90H 627930

Component
Hydraulic System

Fluid
{not provided} (--- GAL)



RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is ISO 46 AW Hydraulic Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP393060	---	---
Sample Date		Client Info		17 May 2024	---	---
Machine Age	hrs	Client Info		495	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	0	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>150	1	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647		6502	---	---
Particles >6µm		ASTM D7647	>2500	1294	---	---
Particles >14µm		ASTM D7647	>80	53	---	---
Particles >21µm		ASTM D7647	>20	12	---	---
Particles >38µm		ASTM D7647	>4	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>-/18/13	20/17/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		1	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		8	---	---
Calcium	ppm	ASTM D5185(m)		84	---	---
Phosphorus	ppm	ASTM D5185(m)		321	---	---
Zinc	ppm	ASTM D5185(m)		434	---	---
Sulfur	ppm	ASTM D5185(m)		1742	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		44.7	---	---

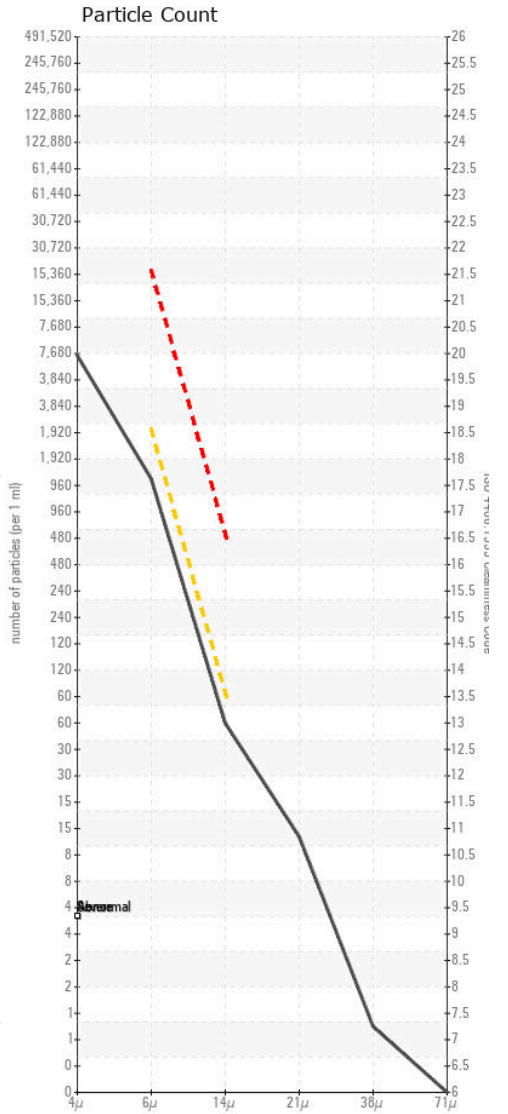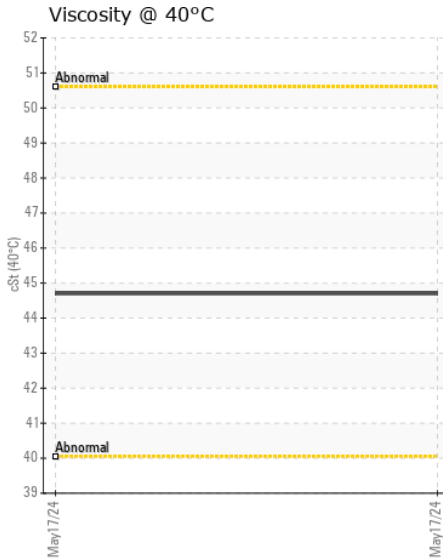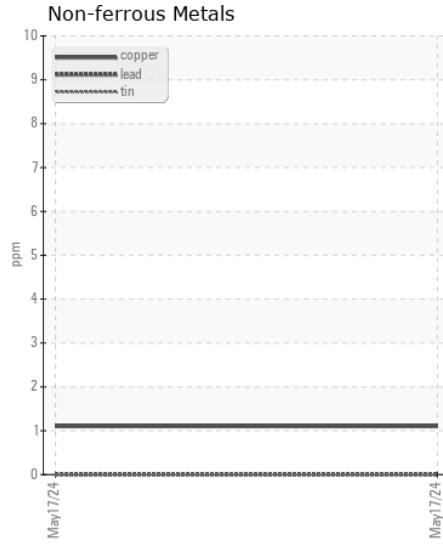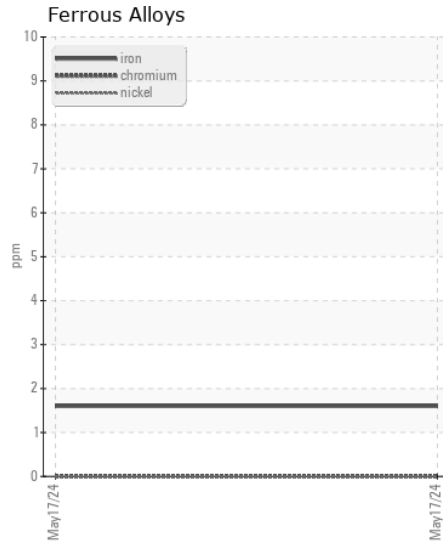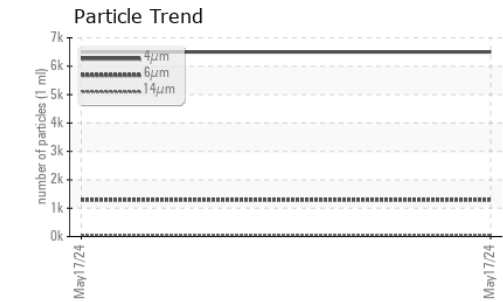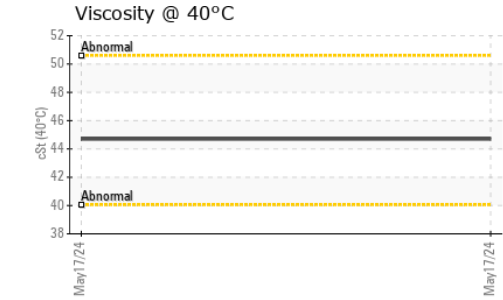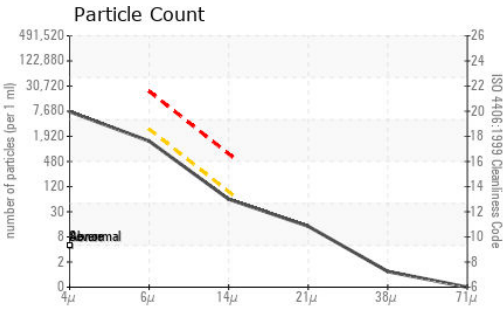

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP393060 **Received** : 23 May 2024
Lab Number : 02637201 **Tested** : 27 May 2024
Unique Number : 5786363 **Diagnosed** : 27 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

STRONGCO EQUIPMENT INC.
 72 CHEMIN DU TREMBLAY
 BOUCHERVILLE, QC
 CA J4B 6Z6
 Contact: Jonathan Lamontagne
 jlamontagne@strongco.com
 T: (450)449-4666
 F: (450)449-7913

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.